

# 120W USB-C Desktop Charger Model: DCC120



User Manual  
v1.1

## Product Features

Charge your MacBook Pro, MacBook Air, Windows laptop, Ultrabook, Chromebook™ equipped with a USB-C charging port

Compatible with most USB-C laptops, Ultrabooks & Chromebooks  
Apple • HP • Dell • Lenovo • Microsoft • Acer • Asus • Google

- The latest GaN charging technology ensures more efficient charging, with less heat in a smaller size
- Ideal for the latest MacBook Air, MacBook Pro 13", 15" and 16"
- Ideal for most Windows laptops and Chromebooks with USB-C charging
- 120W of power allows you to charge up to four devices at the same time
- Two USB-C ports for charging two laptops, tablets or phones
- Two USB-A ports for charging two phones, tablets or other USB devices
- Built-in over charging, over current, over heating & short circuit protection

## Product Specifications

Model: DCC120

Input: AC 100-240V 50/60Hz 2.4A

USB-C Output 1 & 2: USB PD3.0 each port supports 100W Max  
5V/3A 9V/3A 12V/3A 15V/3A 20V/5A


USB-A Output 1 & 2: QC 3.0 each port supports 18W Max  
5V/3A 9V/2A 12V/1.5A

Total Power Output: 120W

Dimensions: 110mm (W) x 98mm (D) x 20mm (H)

Net Weight: 240g

## Product Diagram

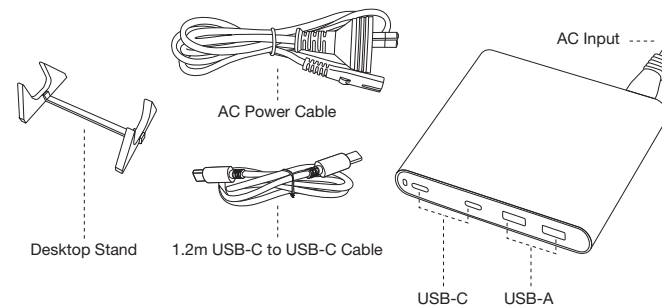

## Package Contents

1 x 120W USB-C Desktop Charger

1 x Desktop Charger Stand for cooling performance

1 x 1.5m AC Power Cable

1 x 1.2m USB-C to USB-C cable that supports 5A/100W charging

1 x User Manual

## Operating Instructions

1. Connect your MacBook, laptop or Chromebook to either of the USB-C ports to start charging
2. Connect your iPhone, iPad, smartphone, tablet or other USB device to either of the USB-A ports to start charging

## Power Distribution Table

	Ports	Total Output	USB-C1	USB-C2	USB-A1	USB-A2
Single Output	USB-C1	100W	100W	/	/	/
	USB-C2	100W	/	100W	/	/
	USB-A1	20W	/	/	20W	/
	USB-A2	20W	/	/	/	20W
2 Outputs	USB-C1+C2	120W	60W	60W	/	/
	USB-C1+A1	120W	100W	/	20W	/
	USB-C1+A2	120W	100W	/	/	20W
	USB-C2+A1	120W	/	100W	20W	/
	USB-C2+A2	120W	/	100W	/	20W
	USB-A1+A2	40W	/	/	20W	20W
3 Outputs	C1+C2+A1	120W	50W	50W	20W	/
	C1+C2+A2	120W	50W	50W	/	20W
	C1+A1+A2	120W	80W	/	20W	20W
	C2+A1+A2	120W	/	80W	20W	20W
4 Outputs	C1+C2+A1+A2	120W	40W	40W	20W	20W

## Caution

- This power supply is only suitable for use with Information Technology Equipment
- Do not apply external force on any connected cable
- Do not unplug by pulling the cable
- Do not place the power cable or device near heating elements
- Do not bend the pins of the power cable
- If there are any strange sounds, smoke or odour, disconnect the power cable immediately
- Do not disassemble (it may cause fire or electric shock)
- Ensure to plug the cable firmly into the socket
- Do not use any cable that is damaged (it may cause fire or electric shock)
- If dirty, wipe the product with a soft dry cloth (do not use water as it may cause electric shock)
- Keep the power plug clean (dirt may cause a short circuit or fire)
- Keep the product out of reach of small children
- Don't unplug the power cable with wet hands (it may cause electric shock)
- If you do not intend to use the product for an extended period of time, unplug the power cable from the wall socket to avoid any chance of over heating or unwanted damage



comsol

www.mycomsol.com.au