

use cold lamination if you just finish the job of hot lamination. When Ready LED turns on in green, put the paper into cold pouch, and insert the pouch into laminator through Lamination Entry.

### HOT LAMINATION

If you press the switch button to "Hot" position, you would have to wait for about 5 minutes until the Green Ready LED turns on , and then put the paper into pouch, and insert the pouch into laminator through Lamination Entry.

### CLEAR THE JAMMED POUCH

This laminator is designed with a manual release device to clear the jammed pouch. When a misfeed or jam occurs, press down "ABS" button and pull out the jammed pouch.

### MAINTENANCE AND WARNING

1. When laminating an important document always do a test pouch (with blank document) first.
2. To clean laminator exterior ensure the laminator is unplugged and cool. Use a damp cloth with water. Avoid detergents and solvents.
3. Do not use this laminator in damp conditions.
4. Do not laminate anything that is more than 0.6mm thickness for best seal.
5. Do not laminate heat sensitive paper.
6. Do not insert open side of pouch into lamination entry, it may lead to jamming or curling inside.

### WARRANTY

See 'Warranties Against Defects' insert sheet for more information.

# GBC Splash A4 Laminator

## Instruction Manual




## Model: LM401

Please read this manual carefully before use to ensure you get the best results out of your machine.

Thank you for buying this GBC SPLASH laminator! This laminator features a slim, compact and colourful design. It accepts pouches ranging from 75Mic to 125Mic up to A4 in size.

## PRODUCT DESCRIPTION

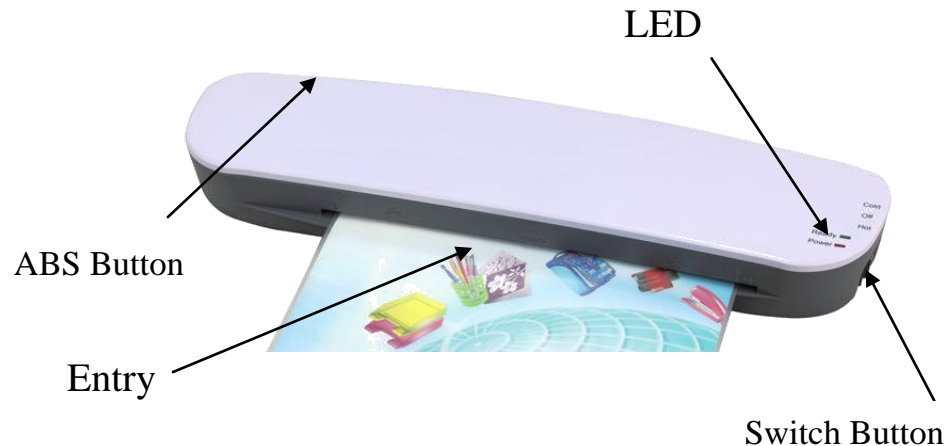

laminator off after use.

3. This laminator should only use power 220-240V/50Hz and be used indoors only.

4. This laminator is for home and office use only.

5. Don't laminate empty pouches and only use this laminator for its intended use of laminating documents.

6. NEVER OPEN THIS LAMINATOR WHILE IN USE & DO NOT ATTEMPT TO SERVICE OR REPAIR THE LAMINATOR YOURSELF.

## OPERATION

### POWER ON and OFF

Connect the plug to mains power, press switch button to turn on the machine. The Power LED would turn into Red. If you press switch button to "Cold" position, the machine is under cold lamination status. If you press switch to "Hot" position, the machine is under hot lamination status.

To turn off this laminator, press switch button back to "Off" position, power will be cut off and laminator is shut off.

## SPECIFICATION

Voltage:	220-240V/50Hz	Current:	1.0 A
Ready time:	5 Min/80Mic	Entry width:	235 mm
Thickness:	0.6 mm	Pouch:	Cold/75/~125 Mic
speed:	250mm/Min	Rollers:	2
Size:	380 x 105 x 47 mm	N.W.:	1.0 Kg

## SAFETY NOTES

1. This laminator should be horizontally displayed in a flat surface with good ventilation. Warning: the laminator housing will become hot when in operation – this is normal for the hot lamination process but please take caution.

2. Never leave the laminator unattended when turned on and always turns