

## Instruction Manual




RoHS




### Notes

1. This strip requires constant voltage with 24V DC safety input.
2. Do not connect the strip (low voltage 12V, 24V) directly to 240V.
3. Maximum running length of the strip without voltage drop is 5m. For longer lengths contact Mondolux.
4. Make sure when one end of the strip is connected to the driver, the other end is disconnected. Otherwise, there is a risk of damaging the strips.
5. Driver power calculation:  $(\text{Length of LED}) \times (\text{Power}) \times (1.1) = \text{Minimum power requirement of the driver}$ .
6. Do not attempt to touch the LED chips. The static electricity of the fingers might damage them.
7. Cut through the scissors symbol on the LED strip, for desired lengths.
8. LED strip comes with 3m adhesive tape, making the installation easy on any surface.
9. Available as a 5m continuous roll, in aluminum foil bag.
10. Heavy items must not be placed on the packaging box.
11. If you have any questions about this product, please contact Mondolux.

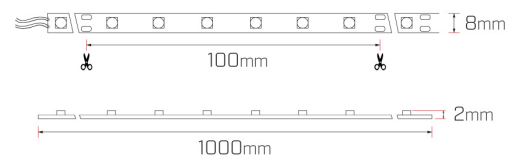


### Handling Instructions

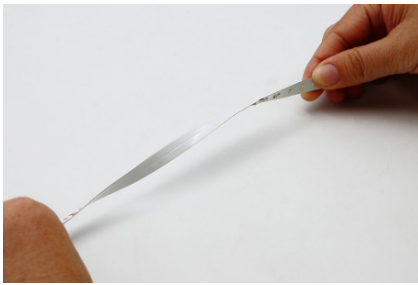


Do not twist the LED strip.



Do not bend the LED strip beyond 90° curvature and 120mm radian.

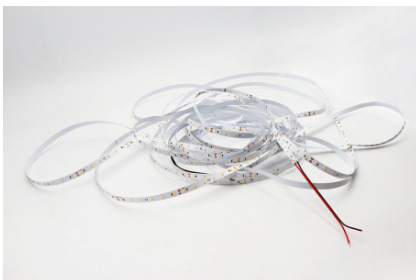

Do not remove LED strip completely from the roll, before installation.

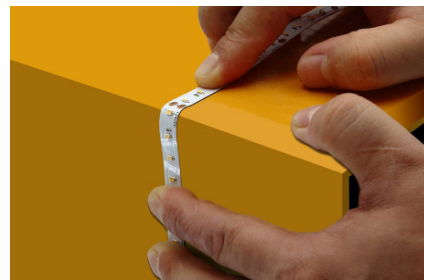

While cutting the LED strip, do not bend at any point other than the scissors symbol. Make sure the curvature is maintained below 120mm and the LED strip is facing upwards.