




2014–2015 CATALOGUE



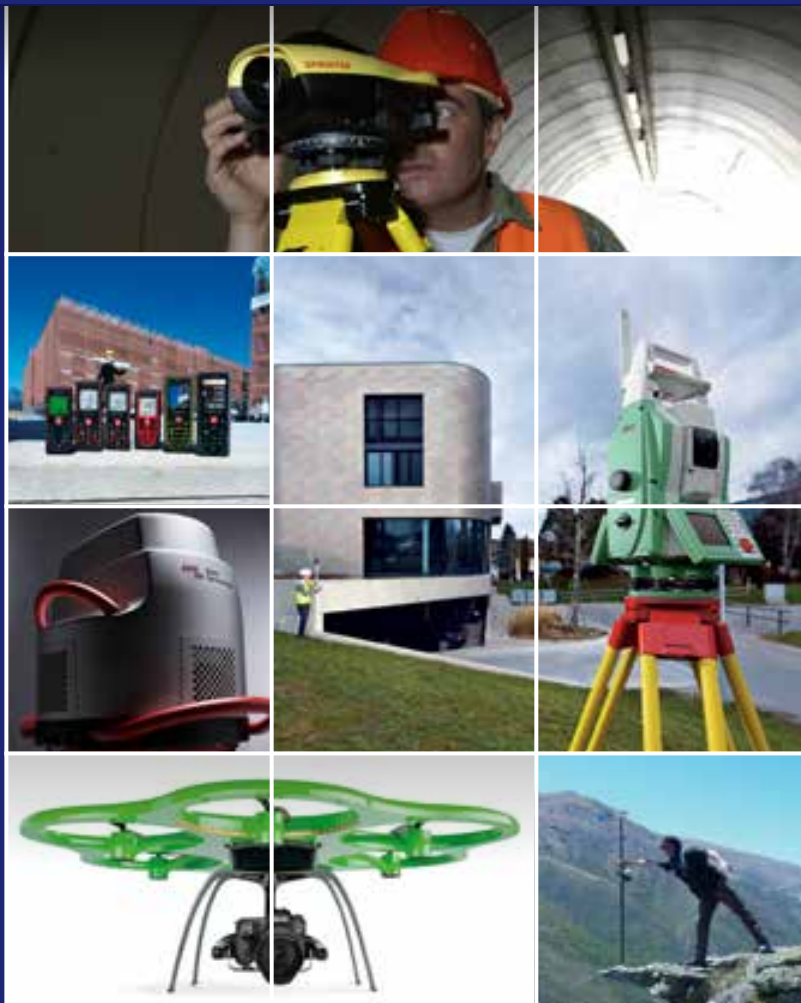

Foreword

Founded in 1934, C.R.Kennedy & Company has grown to become Australia's largest supplier of surveying instrument in Australia by dollar value. We are proud to represent many of the world's leading manufacturers of geospatial hardware and software, such as Hexagon / Leica Geosystems, Riegl, Optec, Aibotix, UAUER, MicroSurvey, Myzox, Pentax, and many more.

Our range of geospatial instruments extends beyond GNSS and total stations, to 3D laser scanners, machine control for the earth moving industry, auto-steer for agriculture equipment, unmanned aerial vehicles (UAVs), RTK CORS network subscriptions, and complete suites of geospatial software packages.

The age of the unmanned aerial vehicle (UAV) is upon us, and C.R.Kennedy & Co. has the expertise to get you flying! With full CASA certification, dedicated pilots on staff, training school places available, and the very best UAV equipment suppliers, we can offer your business a smooth entry into this exciting new industry.

Backed by highly qualified and experienced staff, and with offices and service centres across Australia, C.R.Kennedy & Co. can offer your business a truly national sales and support service of the highest calibre.

Robert Kennedy
Director

Contents

Automatic Levels	2	Pipe Lasers	44
Theodolites	3	Digital Spirit Levels	45
Total Stations – Leica Builders	4	Survey Accessories – Batteries	46-47
Total Stations – Leica FlexLine Plus	5	Survey Accessories – Chargers	48
Total Stations – Nova MS50	6	Survey Accessories – Chartwell Field Books	49
Total Stations – Nova TS50	7	Survey Accessories – Compasses & Clinometers	50
Total Stations – Leica Nova Software	8	Survey Accessories – GME Radios	51
Total Stations – Leica Viva	9	Survey Accessories – Measuring tapes	52
Leica Monitoring	10	Survey Accessories – Measuring wheels	53
Leica Viva GNSS	11	Survey Accessories – HPRC Cases	53
Leica Viva Field Controller	12	Survey Accessories – Memory	54
Leica Viva GIS	13	Survey Accessories – Miscellaneous	55-56
Leica Reference Stations	14	Survey Accessories – FPM Plummets	57
TPS & GNSS Software	15	Survey Accessories – Pentax Binoculars & Cameras	58
Desktop Software – Liscad	16-17	Survey Accessories – GPS Accessories	59
TPS & GPS Software – Microsurvey	18	Survey Accessories – Planimeters	60
Desktop Software – Microsurvey	19	Survey Accessories – CST Poles	61
SmartNet Aus	20	Survey Accessories – Leica Poles	62
Laser Scanning – Leica HDS	21	Survey Accessories – Leica Tribrachs	63
Laser Scanning – Riegl	22	Survey Accessories – Carriers	64
Laser Scanning	23	Survey Accessories – Leica Prisms	65
Unmanned Aerial Vehicles (UAVs) – Aibotix X6	24	Survey Accessories – Prisms & Accessories	66
Unmanned Aerial Vehicles (UAVs) – Uaver	25	Survey Accessories – Prism Accessories	67
Rail Alignment	26	Survey Accessories – Reflectors	67
Underground Service Locators	27	Survey Accessories – CST Prisms	68
Leica iCON	28-29	Survey Accessories – Adapters & Plumb Bobs	69
Machine Control Digging Solutions	30-31	Survey Accessories – Polytech Pegs	70
Machine Control Grading Solutions	32	Survey Accessories – Spray Paint & Flagging tape	71
Machine Control Paving Solutions	33	Survey Accessories – Staves	72
Cobra - Locator GPR	34-35	Survey Accessories – Bi-Pods & Tripods	73-75
Leica Disto	36	Survey Accessories – Wall Stations	76
Leica Disto Accessories	37	Lenspen Cleaning Pens	77
Leica Disto 3D	38	C.R. Kennedy National Hire Fleet	78
Leica Disto Packages	39	Repairs and Service	78
Leica Rugby	40-41	Technical Support & Training	79-81
Leica Lino Laser Levels	42	Maintenance Agreements	82
Tuf Laser Levels	43	Insurance & Finance Options	82



NAK2 For survey grade levelling. #LG352038

- Auto level
- Accuracy 1km d run, 0.7mm
- 0.3mm accuracy with parallel plate micrometer
- 32 x magnification
- Operating temp -20° to +50°
- IP53 weather resistant
- 3 year warranty



NA700 series Mid range levelling. NA720# LG641982, NA724, LG641983, NA728# LG641984

- NA720: 1km d run, 2.5mm
- NA724: 1km d run, 2.0mm
- NA728: 1km d run, 1.5mm
- NA730: 1km d run, 1.2mm
- Shortest focus range of 0.5m
- 3 year warranty
- IP57 – weather proof
- Operating temp -20°C to +50°C



Jogger 20/24

For construction levelling.

- Jogger 20: #LG762263,
Jogger 24: #LG762264,
Jogger 28: #LG783739,
Jogger 32: #LG783740
- Jogger 20: 1km d run, 2.5mm
 - Jogger 24: 1km d run, 2.0mm
 - Jogger 28: 1km d run, 2.0mm
 - Jogger 32: 1km d run, 2.0mm
 - 20, 24, 28 or 32x magnification
 - IP54 weather proof
 - Operating temp -20°C to +40°C
 - 1m shortest focusing distance



Sprinter 50/150M/250M **Digital Level**

- Simply aim, focus and press measure.
Fast and error free digital levelling.
Sprinter 50: #LG762628, Sprinter 150:
#LG762630, Sprinter 250: #LG762631
- Sprinter 50 accuracy: 1km d run, 2mm
 - Sprinter 150/250 Accuracy: 1km run, 1mm
 - Measures bar coded staff up to 100m away
 - 1000 point memory for M models
 - 2 year warranty



DNA 03/10 Digital Level

- Up to a 50% time saving over conventional levels. DNA03:
#LG723289, DNA10: #LG726540
- Alphanumeric keypad
 - DNA03 accuracy:
1km d run, 0.3mm (with Invar)
1km d run, 1mm (with standard)
 - DNA10 accuracy:
1km d run, 0.9mm (with Invar)
1km d run, 1.5mm (with standard)
 - 6,000 measurement internal memory
 - Rechargeable or Alkaline
 - Measures bar coded staff up to 110m away



Pentax AP-200

- Rugged and dependable, ideal for engineering and construction use.
AP201: #519216, AP241: #519218,
AP281: #519217
- AP201: 1km d run, 2.5mm
 - AP241, 1km d run, 2.0mm
 - AP281, 1km d run, 1.5mm
 - 20, 24 or 28x magnification
 - Short focusing of 0.4m
 - IP54 weather proof

Theodolites



Prexiso T.o.2

#LG789311

- 2" accuracy
- Laser plummet
- Dual LCD screens
- Audible notice for 90° turns



Leica Builder 109

#LG772727

- 9" accuracy
- Laser plummet
- Dual axis compensator
- Audible notice for 90° turns



Pentax ETH-510

#519237

- 10" accuracy
- 30x optical magnification
- Dual LCD screens
- Optical plummet



Tamaya TD-4

- Designed for weather balloon tracking
- Optional printer for real time print outs
- 18x optical magnification
- Create graphs showing relationship between altitude, wind speeds, and wind directions

Total Stations – Leica Builder



Leica Builder 100

if you need to trust angles and alignments #LG772727

With a laser plummet for simple and fast setup over control line, dual axis compensation for accurate plumbing, endless drives eliminating steps, audible notice for 90° turns, graphical levelling aid for fast and convenient setup and IP55 rating, the Leica Builder 100 is an outstanding theodolite.

Leica Builder 200 when tapes are a thing of the past #LG772730

Traditional layouts require many steps and manipulations. The Leica Builder 200 reduces these steps. As such the Leica Builder 200 adds benefit by reducing the number of set-ups and offers laser-aided layouts up to 80m/260ft. Its serial interface allows connection to any 3rd party device/program. 3 languages loadable.



Leica Builder 300

when a construction plan goes digital #LG772731

Call up plan data and record points eliminates read and write errors, data exchange via industrial grade USB stick simplifies data handling, a direct DXF download function, tracking mode, setup any-where function, optional volumes calculation and laser distance measurements up to 120m/400ft make the Leica Builder 300 a real workhorse.

Leica Builder 400 if performance makes the deal

With an extended working range to prisms of up to 500m/1600ft (optional 3500m/2.2mi), a full alpha-numeric keyboard for rapid entry/recall of point numbers (cell phone style use), short range laser distance measurements with 15m/50ft for quick as-builts of inaccessible points and a huge memory of 50,000 points, Leica Builder 400 is the high performer in its league.



Leica Builder 500

when versatility meets efficiency #LG772736

The “flagship” of the Leica Builder Series equipped with all of the above features plus wireless communication via Bluetooth, full laser distance measurements up to 250m/820ft and up to 1.5mm accuracy at 100m covers the full range of tasks to be performed on any construction site. An -30°C option is available additionally.

Builder Specifications	Leica Builder 100	Leica Builder 200	Leica Builder 300	Leica Builder 400	Leica Builder 500
Full Power Site Software					✓
Wireless Communication					✓
Prism Measurement Mode				✓	✓
Full alphanumeric keyboard				✓	✓
Volumes Calculation			✓	✓	✓
Data Im/Export to USB Stick			✓	✓	✓
PC/Handheld Interface		✓	✓	✓	✓
Laser Distance Measure		✓	✓	✓	✓
Control Line Setup		✓	✓	✓	✓
3 Languages	✓	✓	✓	✓	✓
Levelling Aid	✓	✓	✓	✓	✓
Dual Axis Compensator	✓	✓	✓	✓	✓
Laser Plummet	✓	✓	✓	✓	✓
Li-Ion Batteries	✓	✓	✓	✓	✓
Internal Memory [points]	–	–	15'000	50'000	50'000
Angular Accuracy	9", 6"	9", 6"	9", 6"	9", 5"	9", 5", 3"
Distance without reflector (90% reflective)	–	80 m	120 m	150 m	250 m
Distance to reflective tape (60mm x 60mm)	–	250 m	250 m	250 m	250 m
Distance to glass prism	–	–	–	500 (3500) m	500 (3500) m

Total Stations – Leica FlexLine Plus



For basic to advanced users with the need for flexibility and performance.

To ensure that you stay one-step-ahead, Leica Geosystems has developed a new generation of Total Stations using the latest technology, the Leica FlexLine. For the first time, hardware and software options can be simply selected so that the FlexLine Total Station exactly meets your requirements.

Leica FlexLine TSo2plus

Best-In-Class Precision

The ideal Total Station for standard measurement tasks. Designed especially for mid-to-low accuracy applications. It comes complete with a standard set of application software that guide you through your daily work.

Leica FlexLine TSo6plus

Top Precision meets High Efficiency

Ideal for mid to high accuracy applications. The full alpha-numerical keyboard and built-in Bluetooth, USB host and device board offer highest user friendliness.

Leica FlexLine TSo9plus

Full Precision at High Performance

The brilliant colour display with touch operation, built-in Bluetooth, USB host and device board offer the highest performance and ease of use.

	TSo2	TSo6plus	TSo9plus
1" angular accuracy	–	–	✓
Enhanced measurement accuracy to prism	1.5 mm + 2 ppm	1.5 mm + 2 ppm	1.5 mm + 2 ppm
Reflectorless measurement range	500 m option	500 m included / 1000 m option	500 m included / 1000 m option
Display with graphics and display illumination	Black & White high resolution	Black & White high resolution	Q-VGA Colour & Touch
Full alpha-numerical keyboard with function keys	–	✓	✓
Second Keyboard	o	o	o
Keyboard illumination	–	–	✓
Electronic Guide Light	–	o	✓
USB Type A and mini B	–	✓	✓
Bluetooth® Wireless	–	✓	✓
SD Card	–	–	–
Imaging capability	–	–	–
Smart Station capability	–	–	–
Onboard software (package content)	FlexField plus (standard)	FlexField plus (advanced)	FlexField plus (full)

✓ included o Optional – Not Available



We know that making the right decision is not always easy.

Wrong decisions are costly and can have long lasting implications. That is why Leica have invented Leica Nova which merges all they are famous and trusted for. In a single instrument, Leica Nova MultiStation combines digital imagery, total station capabilities and 3D laser scanning.

Coupled with the latest Point Cloud Software Technology, Leica Nova gives you access to a new dimension in measuring technology. We cannot decide for you, but Leica Nova can help you to make the right decision when it really matters. Take pride, make the right decision! Every time. Everywhere.



Integrated scanning of every detail

The Leica Nova MS50 integrates 3D point cloud measurements into a regular survey workflow. This lets you collect and visualise your topographic survey data together with detailed high-precision scans. Save time by checking your data for integrity and relevance and avoid costly reworking or returns to the field. Benefit from better decisions with richer and more detailed data.



Precise long-range scanning

- 1000 pts/sec up to 300 m
- Scan range up to 1000 m
- Millimetre scan precision

Fast pinpoint r2000 edm

- Reflectorless range beyond 2000 m
- Significantly reduced measurement times

Wide angle overview camera

- Target acquisition with 20Hz live video stream
- Simple and comprehensive image-assisted documentation
- Automatic capture of panoramic images



Proven technology for unmatched versatility

The Leica Nova MS50 provides proven total station functionality with superior sensor integration for highest precision, performance and full automation of measurement procedures. Together with the benefits of GNSS connectivity, the Leica Nova MS50 offers complete versatility by delivering reliable results wherever and whenever you need them.



Image assistance for every situation

The Leica Nova MS50 features an overview camera and a telescope camera with 30x magnification and autofocus. State-of-the-art image processing technology delivers live fluid video streaming of highest image quality. The imaging capabilities of the Leica Nova MS50 open up new opportunities of operating the MultiStation in an almost infinite range of applications.

High resolution telescope camera

- 30x magnification for high resolution images & precision target acquisition
- Automatic focussing

Robust ip65 design


- Highest protection rating in the industry
- Withstands MIL standard blowing rain test

In-field point cloud processing

- Automatic point cloud registration
- 3D point cloud viewer
- On-board surface modelling

Ultra-dynamic automation

- Best-in-class in speed and acceleration
- Automatically find prisms with PowerSearch
- Maximised service intervals

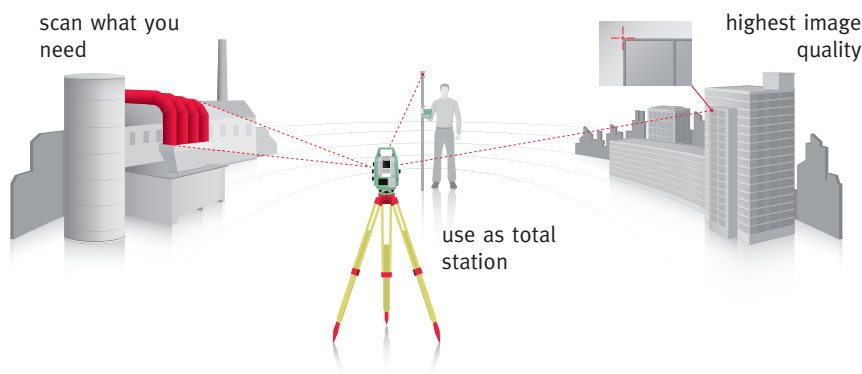



The latest generation of surveying technology concentrates on a central factor: precision.

In order to address every challenge and make fast decisions, you need the ultimate in precision and perfection that today's technologies can offer. And that is precisely what you get with the Leica Nova TS50.

The Leica Nova TS50 redefines the meaning of precision with its optimum combination of angle and distance measuring. At the same time, it offers extraordinary acceleration and speed for highest efficiency, integrated overview and telescope cameras and the latest intuitive SmartWorx on-board software. True perfection: discover the Leica Nova TS50..



Image assistance for every situation

The Leica Nova TS50 features an overview camera and a telescope camera with 30x magnification and autofocus. State-of-the-art image processing technology delivers live fluid video streaming of highest image quality. The imaging capabilities of the Leica Nova TS50 open up new possibilities for operating this perfect total station in an almost infinite range of applications.



Leica Smartworx

The Leica Nova TS50 is equipped with the latest Leica SmartWorx software to provide unparalleled ease-of-use and performance. No matter how complex the application, Leica SmartWorx has functionality to complete every task with ease. With identical operation for TPS and GNSS, changing between Leica TPS and GNSS instruments is smooth and simple.



Proven technology for unmatched versatility

The Leica Nova TS50 provides proven total station functionality with superior sensor integration for highest precision, performance and full automation of measurement procedures. Together with the benefits of GNSS connectivity, the Leica Nova TS50 offers complete versatility by delivering reliable results wherever and whenever you need them.

Unrivalled angular accuracy

- 0.5" Angular accuracy
- 0.5" Automatic Aiming accuracy (ATR)

Pinpoint edm-accuracy

- 0.6 mm + 1 ppm to prisms
- 2 mm + 2 ppm to any surface

Wide angle overview camera

- Target acquisition with 20 Hz live video stream
- Simple and comprehensive image-assisted documentation
- Automatic capture of panoramic images

High resolution telescope camera

- 30x magnification for high resolution images and precision target acquisition
- Automatic focussing

Leica Smartworx software


- Complete suite of applications
- Easy-to-use with clearly laid out graphics, logical menu structures and simplified workflows

Ultra-dynamic automation

- Best-in-class in speed and acceleration
- Automatically find prisms with PowerSearch
- Maximised service intervals

highest image quality


functionality for every

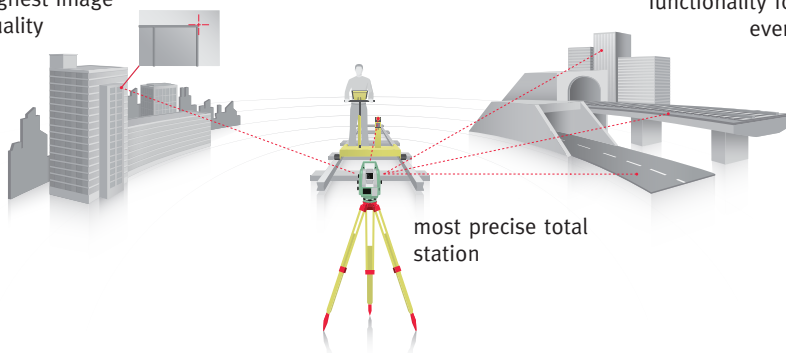

most precise total station

Leica MultiWorx

Leica MultiWorx for AutoCAD is for point cloud processing newcomers using Leica Nova MS50's integrated laser scanning capability. This plug-in for AutoCAD and Civil 3D lets drafters and designers work with rich, 3D point clouds in a familiar CAD environment. It also provides simpler and more powerful tools for navigating point clouds and creating deliverables than native CAD capabilities.

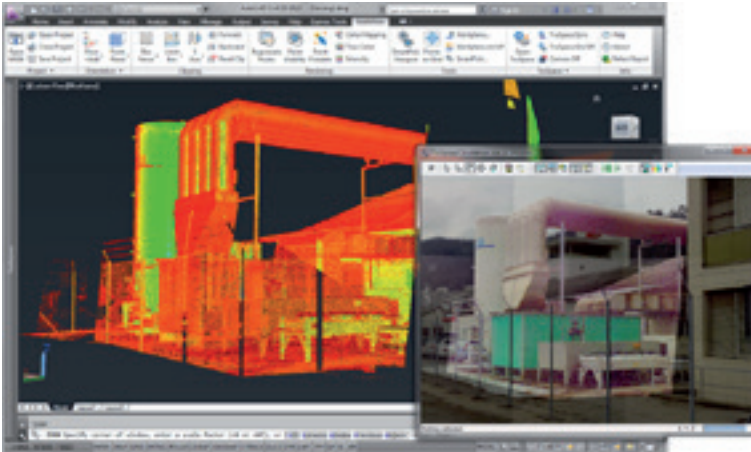

Point Cloud Management

Simplified opening of point cloud data; 3D limit boxes, slices, interactive visualisation of all size data sets.

Rendering

Level of Detail (LOD) graphics, «Single pick» point cloud density control

Visualisation

Intensity mapping, true colour; limit boxes, slices. TruSpace panoramic viewer: Select view point from keyplan; Drive CAD viewpoint from TruSpace; Quick limit box in CAD from single pick; Send point picks from TruSpace to CAD command; Includes background images


Drafting Support

Automatically orientate UCS to walls and floors; UCS Orientation Support with a few simple picks on the point cloud; High point, low point and ground point SmartPick Snapping; Creation of COGO points on a user specified Points on a Grid; Project linework to Workplanes

Leica Infinity

TPS, GNSS, images, scans and more:

so many different kinds of data come together on a field project – no problem at all for Leica Infinity. Numerous data formats can be edited, archived and exported to CAD applications – easily, without data loss and without the hassles involved in conversion. This not only for data from different instrument types, but also from multiple sites and survey teams. Leica Infinity differentiates between and transparently processes all data – for simplified, automated and logically expanded workflows, and a faster overview of the project as a whole.

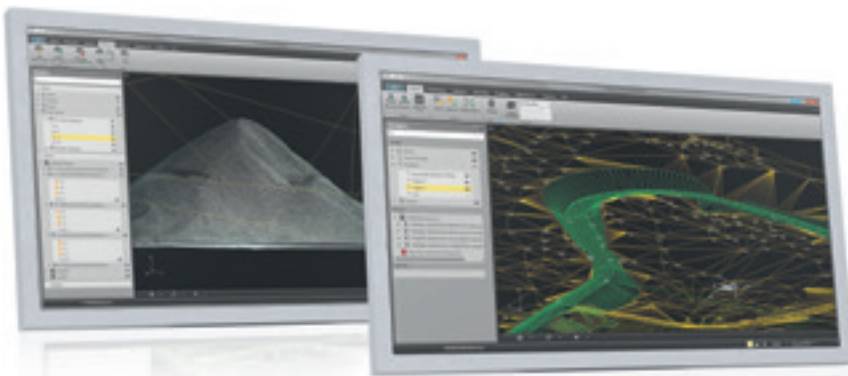

General Components

- Data and Project Management
- Data Import
- Data Export
- 3D viewing
- Editing
- Reporting

Feature Code Processing

- Code Manager
- Feature Code Processing

Data Processing options

- TPS data-processing
- 3D Network Adjustment
- Surfaces
- Scanning
- Imaging

Total Stations – Leica Viva

Total Viva Solution - Leica TPS together with CS controller, GNSS and SmartStation.

The Leica Viva TS11 and TS15 are the fastest imaging total stations in the world. Productivity and documentation rises to the next level. Complete every project easier and faster than ever before. Designed to work seamlessly together, Viva controller, Viva GNSS, Viva TPS, and Viva SmartStation offer a comprehensive system.



TS11 – Manual Total Station

The most advanced manual total station

Leica Viva TS11, is the most advanced manual total station with the inclusion of advanced imaging functionality and the Leica SmartWorx Viva easy-to-use onboard software. Leica Viva TS11 raises productivity to the next level with imaging and Leica SmartWorx Viva software. The unique capture-sketch-link functionality enables high resolution total station images to be captured, enhanced with sketching and then linked to any point of interest. Costly revisits can be avoided to significantly improve productivity. Every vision on every scale becomes reality with ease.

TS12 - Robotic Total Station

Robotic performance on a budget

Leica Viva TS12 is packed with features, such as the unique PowerSearch sensor which finds prisms regardless of their location in seconds and the light weight Leica CS10 controller which provides secure wireless connectivity to the total station. Together with the easy-to-use Leica SmartWorx Viva software, robotic surveying has never been so easy and productive.

TS15 – Robotic total station

The fastest imaging total station

The Leica Viva TS15 is a state-of-the-art total station that provides advanced imaging functionality combined with dynamic tracking capabilities for one-person surveying. Furthermore, Leica Viva TS15 features the easy-to-use Leica SmartWorx Viva onboard software.

The Leica Viva TS15 adds a high-resolution camera to further enhance total station productivity. Traditional robotic operation is significantly improved with imaging features through Image Assisted Surveying and Documentation.

Thanks to live streaming of the total station view on the robotic controller, remote points can be easily measured with the tap, turn & measure functionality without returning to the total station.




SmartStation & SmartPole

Extend the TS15 by integrating full GNSS functionality to further improve productivity. The TS15 can be used as a Leica SmartStation for TPS setup without the need of control points, traverses and resections, or as a Leica SmartPole to save time with setup 'On-the-fly' and measure parallel with TPS and GNSS for double productivity.



Whether you monitor the movement of a volcanic slope, the structure of a long bridge or track the settlement of a dam; whether you measure, analyse and manage the structures of natural or man-made objects: the monitoring systems by Leica Geosystems provide you with the right solution for every application.

Our solutions provide reliable, precise data acquisition, advanced processing, sophisticated analysis and secure data transmission. Using standard interfaces, open architectures and scalable platforms, the solutions are customizable to meet individual requirements – for permanent and temporary installations, for single sites and monitoring networks.

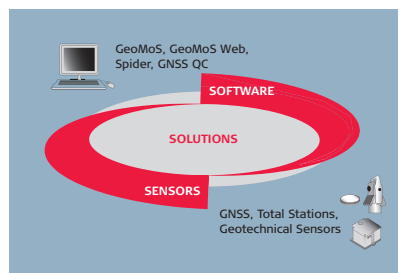

Monitoring Software

Leica GeoMoS software provides a highly flexible automatic deformation monitoring system that is able to combine geodetic, geotechnical and meteorological sensors to match the needs of your monitoring project, whether it is large or small, temporary or permanent


With the addition of the GeoMoS Web service, visualisation and analysis of monitoring data can be performed anywhere and anytime using a web browser, mobile phone or tablet. Make important decisions with Leica GeoMoS.

GeoMoS Scanning – Read between the lines

The Leica Nova MS50 with Leica GeoMoS: A break-through in deformation monitoring



Automatic deformation scanning



Seamless workflow with brand new n.Vec Technology



3D visualisation of deformation clouds



Monitoring Prism

GMP104 #LG641762
GMP104 Replica #A1002

Mini Prism with L-bar : Mini monitoring prism mounted in metal holder. Supplied with L-bar for fixed installations. The prism offset is dependant on the mounting position. Max. IR range of 2000m (7000ft).



Monitoring Prism

GPR112 #LG726295
Omni 1100-C #541063
CST 63-3011 #533011

Large diameter monitoring prism for long range measurements. For installation on M8 or 5/8" threaded bolts. Built-in filter prevents condensation on the reflecting surface. Rain/snow cover available separately. Max. range with IR of 2500m.



Leica TM50

CONTINUOUS OPERATION AND RELIABILITY

The Leica Nova TM50 meets the challenge of 24 hours, 7 days a week monitoring applications. It is designed to withstand the roughest use in the most severe environments. The Leica Nova TM50 will operate throughout a wide temperature range and is protected against wind driven rain, sand and dust. The Leica Nova TM50 is fully operational in bright sunlight and complete darkness.

HIGHEST MEASUREMENT ACCURACY

- 0.5" Angular accuracy
- 0.6 mm + 1 ppm distance accuracy
- 0.5" Automatic Aiming (ATR) accuracy and 3 km range

ROBUST IP65 DESIGN

- -20°C to +50°C operating temperature
- IP65 protection against wind, dust & rain

HIGH RESOLUTION OVERVIEW AND TELESCOPE CAMERA

- Automatic capturing of panoramic images
- 30x magnification for high resolution images and fine aiming
- Automatic focus

FLEXIBLE CONNECTIVITY

- Wireless LAN
- USB port
- Bluetooth®, RS232

POWER MANAGEMENT

- External power supply
- Internal battery charging

HIGH DYNAMIC PIEZO DRIVES

- Best-in-class speed and acceleration
- Zero noise pollution
- Maximum service intervals



Leica Viva GS14



Leica Viva GS10



Leica Viva GS15

Leica Viva GNSS is a complete range of versatile GNSS solutions for you. From completely integrated, to totally modular solutions; Viva GNSS provides a system to master all of your tasks.

Leica Viva GS14 – Designed for performance

The Leica GS14 is the most compact and powerful GNSS receiver. The integrated mobile communications and UHF modem means it is suited for any measuring task. With its convenient, integrated design, the Leica GS14 is easy to use. Together with the leading GNSS RTK the Leica GS14 meets the highest standards for measurement technology.

Leica Viva GSo8 Plus NetRover – Simple “Turn-on & Measure” GNSS solution

The Viva NetRover using the new Leica Viva GSo8 GNSS receiver has been designed to create an ideal RTK network rover. Consisting of a GSo8 GNSS receiver and a CS10 3.5G field controller to create an easy to use all-in-one GNSS Network Solution. The Leica Viva NetRover is optimised for RTK network use. All components work seamlessly together, creating a lightweight and cable-free network rover. The NetRover automatically connects to any reference station network, and with full support of the RTCM 3.1 transformation message, it is no longer necessary to measure control points for the determination of a local transformation, saving time and reducing errors.



Leica Viva GS10 / GS15 Work as you want to

The Leica GS10 and GS15 are designed to suit any surveying task

- Exchangeable communication devices for field base stations and RTK rovers with removable SIM cards (Built-in for GS15).
- Fully scalable sensor allows you to buy only what you need today and upgrade with additional functionality as you need it.
- Integrated web server to configure the logging of Leica or RINEX raw data and measure with one button press in the

Leica Viva GS12 SmartPole – Complete freedom of choice

The Viva GS12 is a lightweight receiver that ergonomically combines GNSS and TPS for a SmartPole setup, an integrated ‘All-on-the Pole’ system for productive one-person surveying. By combining the GS12 GNSS receiver and a 360° prism, you can use GNSS to orientate your TPS and easily switch between GNSS and TPS to measure any point with total flexibility. With the SmartPole there is no need to first measure orientation points. By starting the survey and conducting setup on-the-fly whilst completing measurements, you save time in survey planning and execution. Viva GS15 GNSS receiver can also be used with Viva SmartPole.



Proven GNSS technology

Built on years of knowledge and experience, the hallmarks of Leica GNSS – reliability and accuracy.

- SmartCheck – RTK data-processing to guarantee correct results.
- SmartTrack – advanced four constellation tracking of all GNSS satellites today and tomorrow.
- SmartRTK – delivers consistent results in all networks.

Leica Viva Uno

Packed with features and designed for use in extreme environments.

- IP67, operating temperature -30 to +60° C
- SD and CF cards and USB stick support
- Camera, WLAN, Bluetooth, colour VGA touch screen
- Easy to use, handheld GNSS data collector
- 14 channel L1 GPS, GLONASS & SBAS sensor
- Post processing accuracy 10mm 2ppm
- DGPS accuracy < 0.4m
- Wide range of apps for all surveying work

Leica Viva Uno CS15 (left) and CS10 (right).





Leica Viva Controller

CS-15 #LG771877

Full 65 key QWERTY keyboard.



Leica Viva Controller

CS-10 #LG771874

26 alpha-numeric keys.

ACTIVE ASSIST

Imagine being in the field and coming across a problem that prevents you from finishing the job. You call your local support engineer, but have trouble explaining your exact problem.

By simply pressing a button in Leica SmartWorx Viva, you can activate Leica Active Assist, and your local support engineer can securely access your device and see exactly what you see. By pressing the buttons for you, your support engineer can guide you back to full productivity within minutes.

You can continue with confidence to complete the survey, and know if the problem ever arises again, you can solve it yourself after being guided step-by-step through a solution.



Leica Viva contains a unique portfolio of wirelessly connected field controllers. With a complete range of easy-to-use software your work can start immediately and be finished faster than ever before.

Your benefit - Simply select your perfect controller and software for unrivalled efficiency.



Simply productive surveying software

With clear graphics, non-technological terminology and simplified workflows SmartWorx Viva is incredibly easy to use.

- Survey, coding and line work
- Advanced coordinate system handling
- Wide range of apps for all surveying and staking tasks

3.5G Modem

The Viva CS10 3.5G and CS15 3.5G field controllers include a fully integrated high-speed 3.5G modem to connect to RTK reference networks and allow mobile broadband internet connectivity for field-to-office data transfer.

Built for the field

Designed for extreme environments, you can always rely on your CS10 & CS15. Comfortable in the hand, and easy-to-use for all tasks.

- IP67 and operating temperature -30 to 60° C
- Tactile, fully illuminated, rubber keypad (numeric on CS10, alphanumeric QWERTY on CS15)
- 2 Megapixel camera
(Perfectly placed for taking pictures when in hand or mounted on pole)
- Colour, VGA touch screen, illuminated

Flexible communication and data handling

Stay connected with a wide range of communication and data storage options. Your CS10 & CS15 is ready for all challenges.

- Fully integrated wireless antenna technology (Bluetooth, WLAN, TPS Radio, GSM/UMTS 3.5G)
- Choice of 2 connector modules

Lemo module: Lemo (USB and serial), USB A host, 7-pin connector, power

RS232 module: RS232, USB A host, USB mini AB OTG, 7-pin connector, power

- Data storage using SD Card, CF Card, USB memory stick

Work how you like

Designed as part of the Leica Viva series, but versatile to work with many instrument and software combinations.

- Ideal for use with all Leica Viva Series Total Stations and GNSS sensors.
- Perfectly designed to be used with SmartWorx Viva surveying software.
- Powerful ARM core processor for many software applications.





Leica Viva Controller – Zeno 10, Zeno 15 & CS25 GNSS

Leica Zeno 10, Zeno 15 & CS25 GNSS are designed for high-accuracy mapping in real-time and post-processing.



The most rugged and versatile GNSS/GIS Handhelds in the market



High performance GNSS/GIS handhelds give you all the power you need. The perfect field tools for maintaining your GIS whether you are working for a utility company, local government, federal agency, or for anyone managing or mapping infrastructure or assets. Leica Zeno GIS series delivers the quality and reliability you can trust.

- IP67 and -30 to 60° C operation
- Combine GIS and Survey equipment

High-Performance sub-meter GNSS/GIS Handhelds



Delivering consistent sub-meter accuracy both real-time and post-processed. Leica Zeno 10 and Leica Zeno 15 handhelds combine a high-performance sub-meter GNSS sensor with a rugged handheld for anyone who needs accurate and reliable data even in the most demanding environments.

- DGPS <0.4 m
- SBAS <1.2 m
- Post-processed sub-meter – decimetre

Packed with power for outstanding performance



The optional docking station ensures quick, direct and easy access to the data you have measured in the field. Just plug in and field data is downloaded, post-processed and updated in Zeno Office, with just one simple click. Together with full support of all survey equipment, data maintenance has never been so easy.

- Convenient wireless or wired data download & upload.

Leica Viva GIS Communications

The Zeno models are available with 3.5G built-in communication modules (integrated 3.5G modem, WLAN and Bluetooth). The Leica Zeno GPS/GNSS and its integrated compatibility with RTK reference station networks enables GIS users to map features in high-accuracy anywhere and anytime, without requiring an external Bluetooth mobile phone.



Zeno05 GIS
controller.

Leica Zeno Software

The Leica Zeno GIS series offers an ideal set of tools for anyone who needs more accurate data in a GIS database. All GNSS post-processing is automated; GIS and GNSS technologies are seamlessly combined in one easy solution.

Leica Zeno Office

Available as Leica Zeno Office and Leica Zeno Office on ArcGIS – an extension to ArcGIS Desktop. Leica Zeno Office is a software package to maintain, manage and post-process GIS, GNSS and surveying data. Zeno Office also provides an easy interface between the field and CAD/GIS applications such as MobileMatriX, AutoCAD, ArcGIS or Microstation.

Leica Zeno Field

Leica Zeno Field is an OEM version of ArcPad 8 and provides in addition to the well known ArcPad™ functionality:

- GNSS raw data logging,
- Easy handling of GNSS configurations (such as DGPS settings), surveying technology made available to the GIS user.
- Automated re-dial to real-time source in case connection gets interrupted.
- Feature accuracy management

EasyIn and EasyOut

Leica Zeno GIS introduces the new EasyIn/ EasyOut workflows to simultaneously:

- Check-in feature and GNSS raw data
- Post-Process and
- Update feature vertices

Whether providing corrections from just a single reference station, or an extensive range of services from a nationwide RTK network - innovative reference station solutions from Leica Geosystems offer tailor-made yet scalable systems, designed for minimum operator interaction whilst providing maximum user benefit.



Leica GR25

GNSS Reference Server

With integrated internal and external device management, multi-user management, high end security, modular and scalable design, the new GR25 GNSS Reference Server will grow with your needs and keep your GNSS applications and networks fully up to date.

Through Leica Geosystems' design, the GR25 allows upgrades of all the key hardware parts, such as tracking, memory, power and communications.

Designed for numerous permanent and semi permanent GNSS network installations and monitoring applications, including RTK and static networks, single base station, field campaigns, structural monitoring, atmospheric and seismic studies and offshore positioning.



Leica GR10

Plug and Play GNSS Receiver

The Leica GR10 is a next generation GNSS reference station receiver that combines the latest state-of-the-art technologies with a streamlined "plug and play" workflow. Designed for a wide variety of GNSS reference station applications, the Leica GR10 offers new levels of simplicity, reliability and performance. The GR10 provides excellent low noise code and phase data with logging and streaming rates up to 50 Hz. The powerful onboard RefWorx software features flexible data handling and communication, ensuring high performance and secure long term operation.



Leica AR10

Multi-Purpose GNSS Antenna with Integrated Radome

Wideband reference station antenna with a large ground plane and integrated radome. The AR10 is the ideal antenna for a wide range of high accuracy permanent and mobile base station applications. Using state-of-the-art technology it offers near choke-ring level performance but without the weight, size and cost. An all new antenna design, together with a large ground plane and integrated radome, ensures that the AR10 provides exceptional signal tracking, phase centre accuracy and multipath suppression.



Leica AR20

Visionary 3D Choke Ring Antenna

The Leica AR20 is designed for permanent and semi-permanent reference network installations, and meets all requirements for a reliable and long lasting antenna. It is future proof for all GNSS satellite signals.

The AR20 provides superior tracking performance by using different depth and width choke rings. The precision design also allows for very low and stable phase centre offsets and very smooth symmetry of the phase centre variations versus azimuth and elevation.



Leica AR25

3D Choke Ring GNSS Antenna

Revolutionary 3D choke ring that sets new standards in low elevation tracking and multipath reduction. The new AR25 has been designed for all existing and currently planned signals of the GPS, GLONASS, Galileo and Compass (Beidou) systems. The AR25 uses a new ultra-wideband Dorne-Margolin element, the industry standard for high accuracy and performance. Designed for a variety of applications, including reference stations, monitoring, seismic studies, scientific and atmospheric studies, the AR25 is a robust high performance antenna, built to last.

**You've collected your data.
The hard work is done.
Or so you think. Without the
right software to process that
data you could end up in a
real mess.**

Leica Geo Office

One Office Software for all your instruments. Seamlessly import and combine data from all your instruments to produce the final results. Manage and combine your data with Leica Geo Office to ensure you get the best results.

- GNSS instrument support
- TPS instrument support
- Level instrument support

Best-in-class Processing Options Years of experience in the fields of surveying and GNSS data processing resulted in the world's most powerful processing options.

- GNSS data processing using SmartCheck techniques
 - TPS processing – from simple station updates to complex traverses
 - Level processing
 - Combined network adjustments
 - COGO calculations, Datum transformations and Volume calculations
- All components integrated in one software. Leica Geo Office enables you to manage your project in an integrated way. No need to transfer data between the various modules.
- Use GNSS processing to automatically update SmartStation setups
 - Combine GNSS and terrestrial data with an integrated Least Squares Adjustment
 - Benefit from volume calculations being instantly updated whenever coordinates change



Leica Exchange

Transfer objects easily between the field and the office with Leica Exchange. The yearly Leica Exchange Service allows an unlimited number of exchanges to an unlimited number of users.



Leica Viva CS15/CS10

With an integrated WiFi and/or 3.5G module (GSM/GPRS/UMTS), your Leica Viva CS15/CS10 simply connects directly to the Internet to easily send and receive objects directly in the field using Leica Exchange. Leica Viva CS15/CS10 devices without a 3.5G module or WiFi can also benefit from Leica Exchange via a Bluetooth™ wireless connection to a mobile phone for Internet access.



Leica Exchange Office

Leica Exchange Office is the ultimate data organisation tool. Easily select data from your local computer, storage media or network and send it directly to any office or field crew. Work directly with objects with no limitations on file sizes. Dataflow is perfectly optimised with an integrated solution that does not rely on complex ftp systems or limited email systems.



Leica SmartWorx Viva

Leica Exchange is seamlessly integrated into the easy-to-use Leica SmartWorx Viva software to allow you to work with objects rather than individual files. Once you've logged on via a secure connection, you are instantly notified once objects have been sent to you, and you can easily send completed jobs back to the office... all without leaving Leica SmartWorx Viva.



Leica Viva TS15/TS11

Simply connect your Leica Viva TS15/TS11 to a mobile phone with a Bluetooth™ wireless connection to gain Internet access and easily send and receive objects directly in the field using Leica Exchange.

LISCAD is a complete field-to-finish system, used by thousands of customers worldwide. LISCAD is designed and developed by LISTECH.


LISCAD interfaces with all popular surveying, engineering and CAD systems.

New users find LISCAD intuitive, easy to use and quick to learn, with comprehensive tutorials and fast technical support. FREE evaluation licences allow real-world use before purchasing. The modular design means you only purchase the functionality you require, keeping costs down.

Features include rigorous geodetic computations, unlimited model size, traverse and least squares network adjustment, 2D/3D transformations, volume computations, geo-referenced background images, 3D Visualisation, profiles, impressive engineering design capability for easy generation of virtually any design, Survey Live for real-time surveying and set-out with Total Stations or GNSS equipment, and Point Cloud for importing, viewing, editing and digitisation of point cloud data.


LISCAD is a portfolio of integrated Land Surveying and Civil Engineering software modules.

These include:

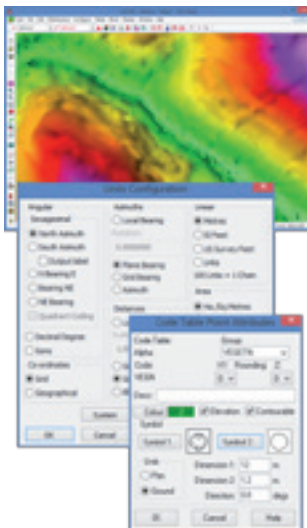

Utilities

Configure, organise, manage and report on your projects with the Utilities module. (FREE with all LISCAD systems)

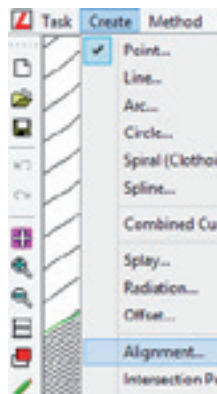

Computations

Full geodetic coordinate geometry (COGO) computations based on a selected map projection can be performed using the Computations module to create, edit and examine points, lines, polygons, text and alignments.



Transformations

The Transformations module can be used to compute least squares transformation parameters on coordinate data sets using a variety of methods and then transform coordinates to the new datum.




Input/Output

Use the Input & Output module to transfer data to and from all popular, total station, data logger, GPS and digital level field surveying devices as well as other software systems including AutoCAD DWG, MicroStation DGN and LandXML.



Least-squares adjustment

The Adjustment module utilises rigorous least squares solutions to adjust your field surveying measurements. Adjust traverse or network frameworks for both horizontal and vertical control.

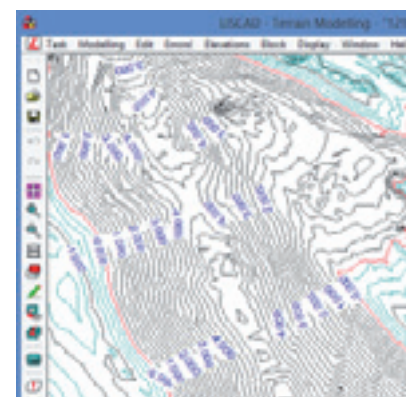

Digital Terrain Modelling (DTM)


Digital Terrain Model (DTM) formation is achieved using a geographically indexed data base to ensure fast and accurate formation of triangles on data sets of any size. Once a digital terrain model is formed the contours can be instantaneously displayed at any interval.

Desktop Software



Volumes

The Volumes module can be used to compute an earthworks volume between surfaces, determine surface intersections, create height difference data sets and compute progressive volumes between planes.

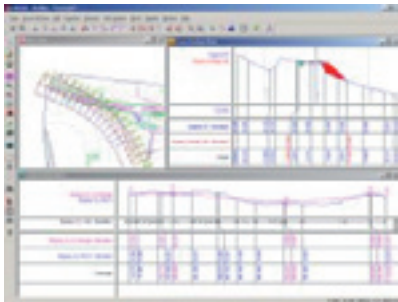


Profiles & Design

Use the Profiles & Design module to create and edit long section and cross sections for CAD output and end area volumes. The Profiles & Design module incorporates an impressive new condition based system for easy generation of virtually any civil engineering and road design.



Background Images

The Background Images module can be used to import orthophotos, satellite images and maps that can be georeferenced to allow for correlation of raster images to your vector geometry and for on-screen digitizing.

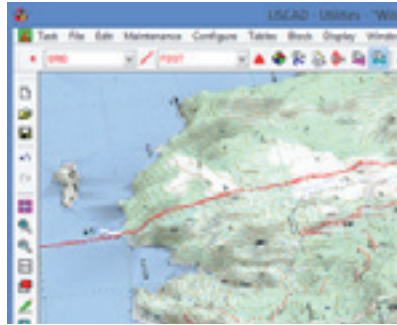


3D Visualisation

The 3D Visualisation module gives you a realistic 3D view of your project. Models can be coloured, textured or have Background Images draped over them and individual triangles can be easily coloured or textured to give a realistic representation of the model. Extensive tools for examining, editing and creating in the 3D environment.

CAD

The CAD module is a CAD application designed specifically for land surveyors and civil engineers to enhance your plan and map production process.



Resource Editor

Use the Resource Editor module to create or edit your own symbols, line styles and fonts for use in all the LISCAD modules.



Liscad Lite

LISCAD Lite is an abbreviated, low cost version of LISCAD designed for data exchange to and from AutoCAD dwg, MicroStation dgn, total station, data logger, GPS and digital level field surveying devices.



Survey Live - Field Surveying Software

Survey Live is for real-time field surveying and stakeout using total stations and GNSS receivers. Designed for small format tablet computers, the graphical interface combines finger or stylus operation with CAD type viewing controls, to clearly see your survey build as you go. Survey Live lets you have the power of your office software in the field as you can still access all your other LISCAD functionality.




Point Cloud

Point Cloud is for importing, viewing, editing and digitisation of point cloud data. View point clouds in the 3D view and use them to create point and line objects.

FREE Evaluation available at:
www.listech.com

We carry software solutions for every step in your workflow. Data collection in the field is just the beginning.



MicroSurvey FieldGenius

The most powerful and productive data collection software for land surveyors. Code-free linework, smart points, and live graphics make FieldGenius the choice of organisations that value productivity.

- Code-free linework
- Best-in-class UI
- Most device support
- Productivity tasks
- Calculation tools
- Part of the perfect workflow



FieldGenius works with many GPS receivers and on a multitude of handheld data collectors. We believe you shouldn't have to buy all new equipment just to upgrade one component.



MicroSurvey STAR*NET

An easy-to-use Windows application that adjusts 2D/3D survey networks using rigorous least-squares techniques. It handles networks containing conventional observations with up to 10,000 adjustable stations and GPS vectors.

If you have used STAR*NET before, you will recognise the same powerful network adjustment functionality that has been used by survey professionals for more than two decades. With this latest version, you will find better organisation of the reports and plot windows, as well as new workflow tools.

Offered as core software with your choice of add-on modules in order to meet your precise needs:

Total Station Module

Unlock all total station controls and smart-menus. When connected to a total station you will have easy access to instrument options.

Robotic Module

This unlocks additional total station features, menus and controls that are related to robotic total stations. FieldGenius supports all popular robotic total stations.

GNSS/GPS Module

Unlock the power of RTK GPS with this add-on module. Easy-to-use menus within the context of GPS. Switch seamlessly between instruments. The GPS toolbar displays to you the current satellite status, sky plot, PDOP values and more.



Advanced Module

This unlocks the powerful roading tools, alignment staking, surfacing commands, and much more.



STAR*NET is available in four different editions:

Pro, Plus, Standard, and Lev - choose an edition that fits your exact requirements.



STAR*NET	Pro	Plus	Standard	Lev
Observations adjusted simultaneously	✓	✓	✓	✓
Includes USB Key for portability	✓	✓	✓	✓
Adjusts 1D differential leveling networks	✓	✓		✓
Graphical display of your entire survey	✓	✓	✓	
User defined instrument library	✓	✓	✓	
Supports Deg/Min/Sec or Gons	✓	✓	✓	
Transverse mercator & lambert grids	✓	✓	✓	
Reduces to NAD27, NAD83, UTM	✓	✓	✓	
Adjusts using rigorous least squares	✓	✓	✓	
Combine with GPS vectors	✓			



**You've collected your data.
The hard work is done.
Or so you think. Without the
right software to process that
data, you could end up in
a real mess.**



MicroSurvey CAD

Powered by IntelliCAD®, field to finish has never been this easy. Available in 5 different editions, MicroSurvey CAD is the design solution engineered especially for surveyors.

Complete survey drafting, COGO, DTM, traversing, volumes, contouring, point cloud, and data collection device interfacing. MicroSurvey CAD is compatible with field data from all major total stations and data collectors and is fully compatible with AutoCAD.

MicroSurvey CAD Standard and Premium are bundled with MicroSurvey inCAD.



Get more with an annual maintenance subscription (AMS).

With a MicroSurvey maintenance subscription, you can be confident that your investment in MicroSurvey solutions will be efficiently managed, enabling you to focus your organisation's time and resources to improving your business. With an AMS, you receive:

- Free updates (never pay for upgrades)
- Critical service packs & notifications
- Priority phone & Helpdesk support
- Subscriber-only promotions
- Training discounts

Not to mention it has long-term cost savings benefits, and allows you to budget more precisely.



Basic Edition

The Basic edition has the core surveying computation tools. Worldwide coordinate system support, geodetic tools, active drawing technology, and field data processing.



Standard Edition

The Standard edition has all the features of Basic, plus all of the advanced CAD drawing commands.



Premium Edition

The Premium edition is MicroSurvey's flagship product and the most popular edition. It has everything you expect in a Survey software package including advanced design capabilities, geospatial data support, site design features, and 3D modelling.



Ultimate Edition

The Ultimate edition has all advanced features including point cloud tools, such as point extraction, point line extraction, lowest-point calcs – all within a dual-window system.



Studio Edition

And finally, the Studio edition, which has everything plus animation capabilities.



Prefer an AutoCAD solution? Check out these options:



MicroSurvey inCAD

This plug-in transforms AutoCAD® into a survey and design powerhouse while maintaining a fully integrated user interface within AutoCAD.



MicroSurvey embeddedCAD

MicroSurvey embeddedCAD, powered with Autodesk technology, is 100.0% compatible with AutoCAD® DWG® files. It's a standalone program with the Autodesk engine.



Upgrades

Leverage your existing investment in MicroSurvey software. We offer all available combinations of product versions, editions, and modules in order to upgrade you to the latest at a fraction of the cost.

MicroSurvey uses a vote-based feedback system, driven by their users, in order to determine the priority of new features and fixes.



Crossgrades

It's important to us and MicroSurvey that you get what you need and you are satisfied with the software purchases you make. For that reason, we offer the ability to crossgrade to another product or edition.

Or, if you're coming from a different brand altogether, let us know and we'll find out if we can process it as an upgrade instead of new license.



What is SmartNet Aus?

Australia's largest RTK CORS network for GPS/GNSS corrections. SmartNet Aus is a fully comprehensive CORS (Continuously Operating Reference Station) Network connected with Spider™ (Leica Geosystems Reference Network software) to provide centimetre level Real Time corrections for Surveying, Construction, Mining, Machine Control and Agricultural Auto-Steer Applications via nTrip. SmartNet Aus is a joint initiative of Leica Geosystems and C.R. Kennedy & Company Pty Ltd.

Problems with conventional RTK

Single Base RTK: One of the problems with current Single Base RTK solutions is distance dependant errors. The further the rover gets from the base, distance dependant errors increase to the point of exceeding the accuracy required for most tasks.

Communications: With GNSS equipment more readily available to users, licensing of UHF frequencies is getting crowded. Most people in built up areas will only get a 5W license, greatly restricting their baseline lengths. Even 25W licenses may only give you 10km range. Topology, buildings, trees and atmospherics all affect your baseline lengths

and with the crowded frequencies, clashing of radio signals is common. Another consideration is future data bandwidth. The increasing number of satellites and GNSS Systems means more data that has to be transferred via the radio.

Operating Costs: Have you ever analysed how much it actually costs you to have your own base? Interest, servicing, firmware upgrades, wear & tear, battery charging & replacement and insurance all add up to your yearly operational costs. Have you worked out just how much time you have spent driving to and from the base to setup and pull down daily? Is your base in a fixed location? How secure is it? Will it still be there in the morning?

The solution: SmartNet Aus

SmartNet Aus have a network of CORS which are connected to Spider software to create RTK corrections in various formats. Spider analyses all the data and creates network solutions removing distance dependant errors and increasing accuracy on long baselines. Communications to SmartNet Aus require the user to connect their GNSS equipment to the internet via either a Bluetooth Mobile Phone or proprietary modems, from there the user connects

to the SmartNet Aus nTrip caster to receive the corrections. Using nTrip eliminates UHF radio issues. No Bandwidth issues. No Interference. No weak signals due to distance. Significantly reduced operational costs are another benefit of SmartNet Aus. Turn on your GNSS equipment, connect to the SmartNet Aus servers and you are working. No setup time for the base required.

Want to perform some Static Surveys? No worries, log onto www.smartnetaus.com and view all the RINEX data available with just a few mouse clicks. You can even upload your Rinex files and let Spider Web™ process the data for you. The Spider and GNSSQC Software, Leica's quality control monitoring software, continuously monitors the network for errors so you know that the integrity in the solution is there. Recently, SmartNet Aus was commissioned by the Gold Coast City Council to provide Network RTK over the entire council area. SmartNet Aus has installed new bases and utilised existing bases to provide the Gold Coast City Council with centimeter accuracy RTK. SmartNet Aus is one of many Reference Networks around the world powered by Leica- Geosystems' Spider software.

For more information, visit www.smartnetaus.com.au or contact your closest C.R.Kennedy office.



Each orange circle represents a RTK reference station. As of December 2013, the network comprised of more than 500 base stations.



With SmartNet Aus, you can achieve millimeter GNSS accuracy from anywhere with mobile phone reception.

Laser Scanning – Leica HDS

For any project, it makes sense to deploy the right tools. For as-built, topographic, detail, and engineering surveys, Leica High-Definition Surveying (HDS) systems are the way to go. Leica's HDS hardware and software captures, visualises and processes 3D spatial data through the employment of advanced laser scanning technologies.

Leica's range of terrestrial 3D scanners are used throughout the world on a wide variety of applications. Together, Leica 3D scanners and Leica's suite of Cyclone software packages are ideal for any as-built projects, including civil, plant, BIM, archaeology, architecture, forensics, forestry, etc.



Leica C5

- Entry level scanner
- Range of 35m
- 25,000 points per second
- Full 360° x 270° field-of-view
- Can be upgraded to C10




Leica C10

- Range of 300m.
- Dual-axis compensator
- 50,000 points per second.
- In-built digital camera.
- Full 360° x 270° field-of-view
- Resolution up to 1mm x 1mm at 300m.
- Can perform traverses and resections



Leica P20

- Rang of 120m.
- Dual axis compensator
- 1,000,000 points per second!
- Can scan upside down.
- In-built digital camera.
- Full 360° x 270° field-of-view
- 1mm noise at 100m.
- Height offset adjustments.
- Local re-calibration service available.

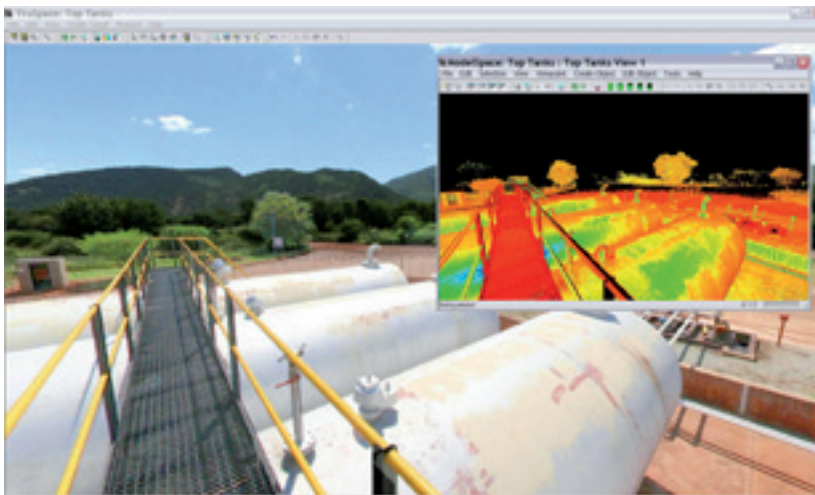

Leica HDS

Leica HDS scan data colourised with in-built cameras and displayed in Leica Cyclone software.

Riegl Laser Systems manufacture a wide range of terrestrial, mobile and airborne scanners. Riegl terrestrial scanners have very high speed data acquisition (up to 250,000 points per second), receive multiple returns per pulse, allow waveform analysis, and come installed with in-built compass, L1 GPS, laser plummet, LAN/WLAN/USB 2.0, and inclination sensors. Riegl laser scanners are used in wide field of applications, such as mining, as-built surveying, civil engineering, architecture, archaeology, city modelling, tunnel surveying, forestry, hydrographic surveying, etc.



VZ-400 Terrestrial Scanner

- Range of up to 600m.
- 122,000 points per second.
- 100° x 360° field of view.
- Accuracy 5mm, Precision 3mm
- External digital camera (optional)



VZ-1000 Terrestrial Scanner

- Range of up to 1,400m.
- 122,000 points per second.
- 100° x 360° field of view.
- Accuracy 8mm, Precision 5mm
- External digital camera (optional)




VZ-4000 Terrestrial Scanner

- Range of up to 4,000m.
- 222,000 points per second.
- 60° x 360° field of view.
- Accuracy 15mm, Precision 10mm
- In-built digital camera
- Ideal for open pit mining applications



VMX-450 Mobile Scanner

- Dual V-Line laser mobile scanner
- Easily installed and removed.
- Range of 800m.
- Very high PRR of 500kHz.
- Integrated L1/L2 GPS, IMU and tachometer
- Accuracy 8mm, Precision 5mm.
- Digital camera system (optional)



LMS-Q68oi Airborne Scanner

- Long range airborne scanner, ideal for complex terrain.
- Easy to install into any fixed aircraft or helicopter.
- 60° wide field of view.
- High PRR of 400kHz.
- 266,000 measurements/second
- Accuracy 20mm, Precision 20mm.
- Laser class 3R.



VQ-820G Airborne Scanner

- Water penetrating, hydrographic scanner, designed to survey seabeds, shorelines, lakes, rivers, as well as land.
- Easy to install into any fixed aircraft or helicopter.
- 60° wide field of view.
- Very high PRR of 550kHz.
- 200,000 measurements/second.
- Accuracy 25mm, Precision 25mm.
- Laser class 3B.

Laser Scanning



Optech

CMS-V400

Optech's CMS Cavity Monitoring System is the ideal scanning solution for dangerous and inaccessible cavities. With wireless control using the included Netpad handheld computer and an extendable boom system, the CMS can go deeper and farther than other scanning solutions, all while maintaining operator safety. The unit is fully programmable, allowing the user to define scan parameters including elevation step, azimuth step and scan limits.

CMS provides efficient and accurate measurements of voids and cavities in underground mines. It can be inserted through boreholes as narrow as 25 cm (10 inches).



Underground cavity scanning with the Optech CMS-V400 scanner.



MDL Dynascan S250X

Designed as a "Plug and Play" mobile LiDAR system, the S250X is a fully integrated high speed laser scanner, high accuracy GPS positioning system, and inertial measurement unit in one. The dual head 'X' Plane S250X Dynascan is designed for higher accuracy at highway road speeds. With a net pulse rate of 72 KHz and a net line rate of up to 60 lines per second, the result is more data at faster speeds with less 'shadowing'.

The S250X's high performance (+/- 1 cm) lasers, with a range of up to 250 meters, makes Dynascan the most effective, 'all weather', rugged mobile mapping system on the market today.



The system is light weight, highly portable and may be used on land or water vessels to acquire 3D survey quality data of topography, stock piles, bulk earthworks, urban developments, industrial plants, utility cables, bridges, dams, harbours, beaches, river banks, and much more.

Accuracy: +/- 10mm with RTK GNSS

Range: 250m

Scanning Rate: Up to 72 KHz

Open cut mining data acquired from the MDL Dynascan.

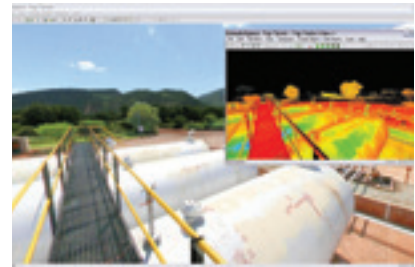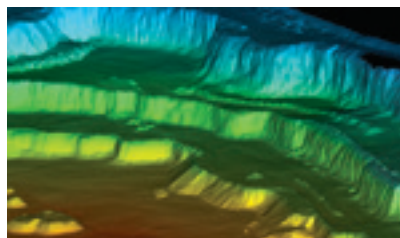

Scanning Software

C.R.Kennedy can sell and train end users on a large range of laser scanning software, for whatever your scanner, workflow or end deliverable may be.

Leica HDS suite

Cyclone - (along with Register, Server, Model, Publisher, Survey, and Import modules).

Cloudworx - plugin for AutoCAD, MicroStation, Rivet and SmartPlant 3D

Topoll - For Topographic survey workflows.

3D Reshaper - For turning point clouds into high quality 3D mesh models.

Riegl software packages

RiScanPro - To optimise the workflow of acquisition, registration and processing of terrestrial laser data.

RiMining - To simplify and optimise the workflow for open-pit mining.

RiProcess - For managing, processing, analysing and visualising airborne and mobile data.

RiAquire - For controlling Riegl airborne and mobile scanning systems.

RiAnalyse - For full waveform analysis of digitised echo signals from Riegl lasers systems.

RiSolve - Automatic registration and colourisation of multiple scans without targets. The fastest solution to acquire, register and colourise outdoor 3D data.

Unmanned Aerial Vehicles (UAVs)

Aibotix X6

#LG8243094

The Aibot X6 is an ultra-modern air robot which is easy to fly and has a high degree of robotics. The intelligent, flying airborne platform has been developed with the latest multi-rotor technology.



We have a range of UAV solutions to cater for all types of aerial work. Our rotor and fixed wing solutions are ideal for;

- Mapping**
- Inspection**
- Oblique Photography & Video**
- Surveillance**
- Scientific Research**
- Search and rescue**
- Conservation**
- Maritime Patrol**
- Forest fire detection**
- Archaeology**



Advantages over fixed-wing UAVs

- Flight position can be maintained
- Can perform both horizontal and vertical movements
- Can produce vertical and horizontal (oblique) photographs
- Can carry different sensors up to 2.5 kg
- Vertical take off and landing
- 100% autonomous flight and data collection
- Camera mount with automatic pitch and roll compensation for flexible camera angle

Advantages over other rotary UAVs

- Propeller protected by ultra lightweight carbon housing
- Can carry high payload up to 2.5kg
- Powered by 6 engines means it may at any time be compensated for the loss of an engine
- Fully automatic, including takeoff, flightplan execution and auto landing
- Close cooperation with Leica Geosystems provides excellent sensor systems
- Own hardware and software development have high innovation cycle over the competition
- Intuitive software for the planning of routes
- Geobox specifically developed to georeference the images
- In addition to the RC remote control via tablet PC possible

Aibot-X6 Technical Details

Length/width	3.4 feet
Height	1.5 feet
Housing	CFK (Carbon)
Weight	2.5kg
Flight weight	4.6kg - 6.6kg depending on payload and batteries
Max. Payload	3kg (higher payloads on request)
Max. Speed	40 kmh
Climb rate	28 kmh
Flight height	Up to 3,280 feet AGL. Max. 9,842 feet ASL
Flight time	up to 30 minutes (dependent on payload)
Operating Temperature	-4 - 104 F°
Sensors	GPS, Gyroscope, ultrasonic sensors, Smart-Camera System with DSP
Controlling	Remote Control, Tablet-PC (optional) or Autonomous
Power Source	Lithium-Polymer 5.000 - 10.000 mA

Unmanned Aerial Vehicles (UAVs)

UAVER is an hi-tech designer and manufacturer of both military and civilian unmanned aerial vehicles (UAVs) and ground control stations (GCSs).



UAVER Swallow

#SWALLOW



UAVER Avian

#AVIAN

Easy handling

The system consists of 3 main components, i.e. ground control station (GCS), unmanned aerial vehicle (UAV) and launch system. The whole system can be setup in 10 minutes.

Light & Portable

The system is packed in a hard case and can be easily transported with a sedan.

Simple Structure

3 servos are the only mechanical part of the system, maintenance work is minimal.

Parachute Landing

Using parachutes ensure a gently, controlled landing, every time.

Ideal for creating orthographic aerial images, 3D digital terrain models (DTMs), real time video surveillance, or aerial photo/videography.

UAVER aircraft can be flown fully autonomously or with manual control, and gently land via parachute deployment.



Technical Details	Swallow P	Avian P
Weight	2.00 kg (4.40 lb)	4.00 kg
Dimensions	100 x 65 x 10 cm (3.28 x 2.13 x 0.33 ft)	160 x 103 x 35 cm
Wingspan	1.00 m (3.28 ft)	1.60 m
Wing Area	20 dm ² (2.15 ft ²)	48 dm ²
Speed	Cruise Speed : 83 km/hr (45 knots) Max. Speed 101 km/hr (55 knots)	Cruise Speed : 64 km/hr (35 knots) Max. Speed 81 km/hr (45 knots)
Endurance	40 - 50 min.	60 - 90 min.
Wind	20 - 28 km/h or 11 - 16 knots	39 - 49 km/h or 22 - 27 knots
Take Off	Bungee Cord & Launch Rack	Bungee Cord
Recovery	Parachute	Parachute
Material	EPP Structure Carbon reinforced	Carbon fibre
Propulsion	Electric brushless 300 W Pusher Prop	Electric brushless 120 W Dual Prop
Battery	Lithium-Polymer 11.1 V 8000 mAh	Lithium-Polymer 11.1 V, 5 mAh
Communication	434 / 868 / 912 MHz (optional) 19200bps Half-duplex 8 channel	434 / 868 / 912 MHz (optional) 19200bps Half-duplex 8 channel
Communication Range	Up to 5 km (Omni) 10 km (Directional)	Up to 5 km (Omni) 10 km (Directional)

Rail Alignment



Amberg Technologies has been the leading provider of specialised rail and tunnel measurement systems for more than 25 years. A unique combination of industry knowledge and engineering expertise has produced innovative and flexible systems, based on practical designs and user-friendly software. With worldwide support and service, these railway surveying solutions have won the trust and respect of both the rail and tunnelling industry.

GRP1000

Fast and accurate rail surveying, construction and tamping

Can be geo-referenced with Leica total station or GPS/GNSS

Software modules:

- Amberg Survey Basic
- Amberg Slabtrack Plus
- Amberg Tamping Plus

GRP3000

Clearance measurements in 2D or 3D to bridges, tunnels and platforms

Software module:



- Amberg Clearance Basic

GRP5000

Clearance measurement and asset capture using laser scanning

Software module:

- Amberg Clearance Plus

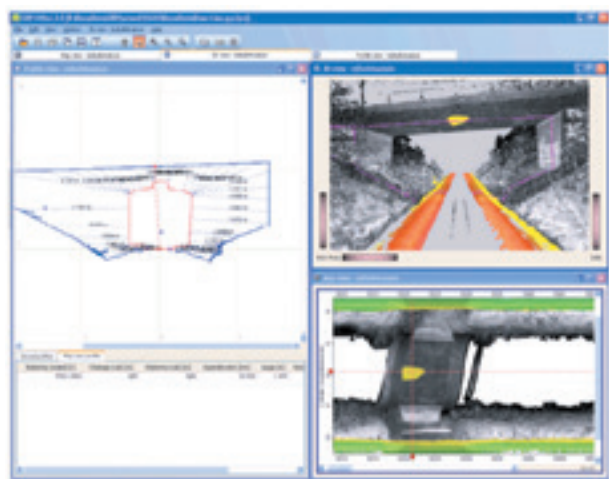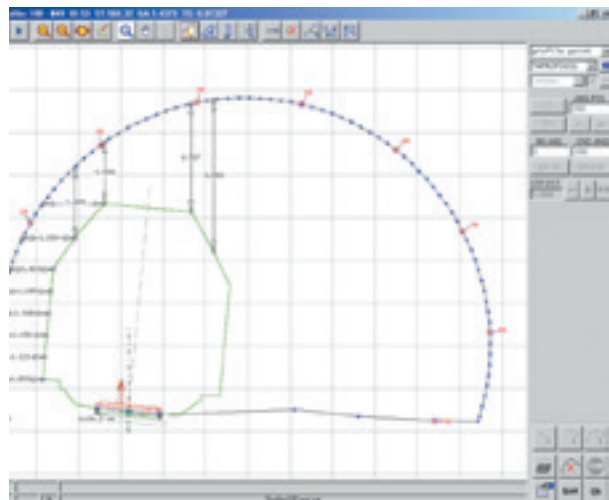

Underground Service Locators

With the DIGISYSTEM operators can locate, trace and mark underground services quickly, precisely and reliably prior to excavation.

It can be used for metallic pipes, power / data cables, and plastic piping or conduit. The DIGISYSTEM takes the guess work out of underground digging, whilst increasing productivity and safety. Buried service location has never been so easy.



Digicat 650i #LG795941

The Digicat 650i has a sensor depth of 3m, fits of data logging, Bluetooth Wireless Connectivity and service depth indication, when used in conjunction with the Leica Digitex.

Available in two display formats, offering depth estimation to 3m and an accuracy of 10%. With its automatic controls and combined detection mode "Auto Mode" the Digicat 550i locator has been specifically designed to reduce human error during the location process.

Combined with its precise and reliable service positioning, the Digicat 550i will prevent damage to underground services during excavation projects. Active signal tracing is available when using the Digitex 8/33 signal generator.



Digitex 100t Transmitter Signal Generator & Digitrace #LG795946

Designed in conjunction with the DIGICAT locator, to easily and accurately trace the route of, or locate, an underground cable or metal pipe that does not carry a naturally present signal. The DIGITEX generates a specific "active" signal, which can then be traced using the DIGICAT. The Digitrace cable comes in 30m, 50m and 80m models.



Digitrace 30m/50m/80m #LG731050 / LG731051 / LG731052

The Digitrace is connected into the Digitex 8/33, and fed into non-metallic pipes or conduits. The Digicat 550i and 200 are used to detect the location of the Digitrace. The Digitrace is available in 30m, 50m or 80m lengths.

CST 19-202HC Magna Track 202 #530602

LCD indicator offers a digital bar graph display, plus standard audio tone, to precisely identify the target object. Metal detector. Locate ferrous objects underground, under snow, or in water. Erase function lets you block out interference from a magnetic disturbance (such as a nearby fence).



Accessories

Digicat carry bag #LG740307

DigiMouse point radiator #LG731053

Property Connection Set #LG731670

Signal Clamp (100mm diameter) #LG731056



Leica iCON

Fully understanding construction carried us beyond the ordinary. Leica iCON was designed from the ground up for the construction market, enabling you to enhance your performance, and increase your profitability through perfecting your construction workflow.



Leica iCON Robot 50

Save time and increase your productivity by doing layout work and as-build checks yourself. With Leica iCON robot 50 you don't need an operator at the instrument. The robotic total station can be operated from the field controller at the prism pole, at the point you need positioning. Designed specifically for ease of use within the construction industry, simply level the instrument and go! With the iCONstruct software, you can use it for a wide range of measuring and positioning tasks on site.



Leica iCON GPS 60

This GNSS SmartAntenna was developed specifically towards construction needs. Featuring superior GNSS technology and various integrated communication options, it meets all requirements for reliable and precise positioning work on site.

Its integrated display shows you full status information of the system simplifying operation and configuration. Leica iCON GPS 60 offers exceptional network capability allowing you to work with SmartNet Aus or other RTK networks for high-accuracy GPS positioning.



Leica iCON 80

Leica PowerBox is designed to exceed the needs of the toughest machine control applications. Vibration, dirt, dust, rain or snow can not stop the Leica PowerBox providing high accuracy uninterrupted data. Combine Leica PowerBox with Leica PowerAntenna for a unique dual GNSS control solution for use on excavators. Use the same components for all off-machine applications, such as base station, pole or site supervisor vehicle solutions. Leica PowerBox is a scalable position system, that can grow with your need. GLONASS, Networking, update rate and base station use, can all be configured to provide a tailored solution for your needs.

Leica iCON telematics

Leica iCON telematics is a web-based suite of tools that allows contractors to increase the efficiency of their machine control operations on site and manage their machinery fleet. It is the main connectivity source of iCONnect, one of the four pillars of the Leica iCON solution family, and features substantial telematics functionalities.



The Leica iCON telematics services include fast and easy data transfer from office to site and to construction machines, remote support for the operators and basic fleet management functionality. iCON telematics seamlessly integrates with the workflow on construction projects and the Leica iCON solutions, simplifying work processes and enabling significant time and cost savings.

Leica iCON telematics currently consists of three modules - View, Sync and Track. These modules can be accessed through an intuitive web-based interface with powerful dashboard to rapidly find important information needed for taking actions. Users are also presented with a fleet overview and have overlay project data on Google map.

View supports multitasking, meaning users can have several machine panels active simultaneously. The office manager or support personnel can remotely view the operator's screen, carry out remote diagnostics and provide instant support if

needed. This reduces site visits and saves time by remotely checking settings on the machine. Supervisors can increase machine uptime by scheduling operator training with a remote instructor.

Sync enables upload of the latest design data to the fleet immediately, ensuring the fleet works with up-to-date project files on the machines. Data can be transferred remotely in both directions from the field to the office, using 'drag & drop' from the desktop. Latest firmware can also be uploaded remotely what reduces machine visits, decreases downtime and simplifies support and maintenance.

Track functionality allows the user to track and monitor the machine fleet in real-time and provide regular activity reports by machine or by project. It enhances day-to-day operations by tracking results instantaneously and monitor the utilization of equipment on site.



Leica iCON CC65 / CC66

versatile tablet PC's are designed to transport a user's office directly to the field

The rugged, lightweight devices have a clear and easy-to-use 7" touch screen designed to facilitate with data collection tasks on site, while at the same time communicating with the central office, real-time data transfer is made easy!

- Large 7" sunlight readable touch screen display for convenient operation
- Windows 7 Ultimate Edition multi-lingual operating system
- Various communication possibilities (Bluetooth®, WLAN, 3G modem, LAN, USB, RS232) for the use with different sensors for different applications
- Leica iCON CC65 model features 3G modem
- Leica iCON CC66 model features 3G modem and long-range Bluetooth®



iXE2

iCON excavate iXE2, 2D excavating system

Our dual-slope system combines the depth, pitch and roll - giving you a complete picture of the excavation works. iXE2 is suitable for small road excavation jobs, drainage work or parking lot excavations.

An additional rotation sensor on the counterweight upgrades the system to a dual-slope capability. The 2D function uses a compass to fix the slope direction. This means that you can move the machine without the system losing the direction.

The dual-slope system contains two sensors that record the pitch and roll and compensate for the tilt of the machine. The machine can thus stand at an inclined position and still carry out levelling work around the entire machine.

2D excavating system functions




Depth

Commonly used for bases, foundations, etc.



Grading Work

Set the right depth and the desired tilt in one direction.




Roll

Sensors record and compensate for the machine tilt.



Slope

Set the desired slope for the embankment.



Laser Reference

Gives possibility to use rotating laser as a reference.



Pitch

Sensors record and compensate for the machine tilt.



Pipelaying

Set the desired depth and slope of the pipe trenches.



Gradient

The system can handle both pitch and roll.




Compass

The system uses a compass to establish the direction of the tilt.



Underwater Work

The bucket motion is shown in the graphical display.



Height Alert

an audible signal warns the operator if the defined limit is exceeded. useful around bridges and overhead lines.



iXE3

iCON excavate

iXE3, 3D excavating system

With the 3D system from Leica Geosystems, you will work with high precision GPS and be able to monitor the excavation position by means of a digital model.

The iXE3 enables you to use the excavator for point collection and stake out activities. iXE3 is suitable for projects requiring staking out, e.g. large road and infrastructure projects and subdivisions, industrial sites or dereliction works.

Connect the machine computer via the built-in GSM modem to get quick support and transfers files. Our 3D system enables you to take the last step towards machine control. Your efficiency rate will improve by up to 30% making it easy to gain return on the investment.

GPS/3D functions



3D/GPS

Our 3D system enables you to use dual slope in 2D and reference models in 3D.



2D or 3D

Switch between the 2D and 3D screens by just pushing a button!



ICON 3D software

Complete your system with iCON 3D, the software that allows you to create terrain models directly on the screen. A function that gives you great on-site freedom.




External depth indicator

Remote site and machine access



The iCON telematics services include fast and easy data transfer from office to site and to construction machines, remote support for the operators and basic fleet management functionality.

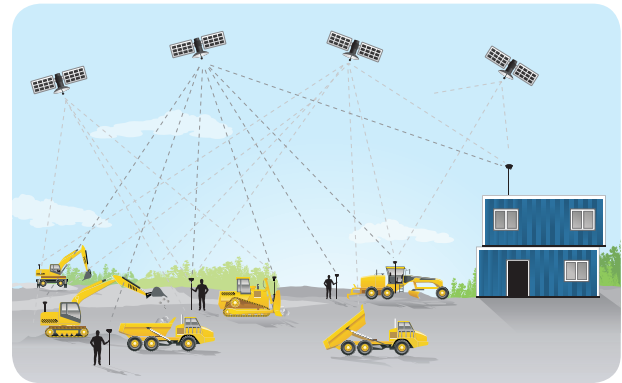

GPS/3D on your machine

The machine computer receives the machine position through a GPS signal and the bucket position from the excavation system. These values are then matched with the digital surface. You will see the bucket move over the design surface telling you how deep to go.



Our machine control displays

Leica Geosystems offers both 2D and 3D solutions. With our unique PowerSnap system, one single 3D display can be used on your dozers, graders, excavators, and wheel loaders. This allows you to spread your investment across more machines and obtain a mixed fleet that you can use for many different tasks.

Elevation




Ultrasonic sensors

Using the Leica Geosystems patented Trisonic is very simple. The curbstone, adjacent road surface or a stringline provides the reference elevation for the moldboard. Ultrasound is often used as a reference on one side and cross-slope on the other.



MLS700 laser receiver

The MLS700 is a laser receiver with a 360 degree range.



Total Station/GPS


The Leica iCON measuring equipment fits seamlessly into your machine control system and the file formats used are supported worldwide. The iCON GPS and the robotic systems will help improve your productivity and precision right from the start.

Cross Slope




Multi-switch

Mounted on the control levers allow you to stay in control at all times – safer, faster and more productive.




Blade tilt sensor

The MSS1300 tilt sensor maintains the desired cross-slope precisely.



Rotation sensor

The MRS1300 rotation sensor compensates the moldboard's rotation angle influence on cross-slope - set the blade exactly how you need it, iCON grade takes care of the rest.



Mainfall sensor

Mainfall compensation allows for precise grade and slope control whatever the project conditions.

Machine Control Paving Solutions

The result of 15 years knowledge and experience from the world's first provider of stringless concrete and asphalt paving, trimming and milling technology



With Leica Geosystems' unique PaveSmart 3D control system, the machine is controlled without stringlines. Starting from the project data, the actual 3D position is measured by robotic total stations and/or GPS receivers and transmitted to the Leica Machine Computer.

High-accuracy machinemounted slope sensors provide long and cross-slope. The results of this "design-vs-actual" comparison represent the elevation and slope corrections required to keep the machine on-grade, typically within an accuracy of 5mm (3mm for concrete), depending on jobsite conditions.

PaveSmart 3D transmits corrections to the machine controller which regulates the hydraulics, in a similar way to controlling with the conventional sensors – meaning your crew doesn't need to be retrained to work with 3D.

- Fully automatic grade, slope and heading control
- Works with the following industry-leading Slipform pavers manufacturers:
 - Gomaco
 - G&Z
 - Wirtgen
 - PowerCurbers & PowerPavers
- Supports all MOBAmatic (PWM & CAN) and Vögele NaviTronic NivelTronic levelling systems and all modern asphalt paver brands
- Puts the project plans directly on the machine
- Imports from as good as every CAD system
- Puts crews in control of their own work – all paving information available at a glance
- Uses Leica Geosystems world-leading 3D sensor technology
- One supplier, one integrated modular solution





- Ground Probing Radar/Antenna system with Rugged PC and Cart
- Fully integrated system. Multi Frequency operation: 100-900 MHz
- Air/Ground Coupled operation. Multiple Applications. 0-10 m depth range
- Real time 2 Depth Range & Channel option. No additional survey needed
- Best penetration and data quality in compared head-to-head tests

Locator GPR

#COBRA SMART

Cobra Locator GPR applications

Just like X-ray and ultrasound can image the inside of your body, the Cobra Locator GPR can be used to image the inside of different materials and structures.

Infrastructure & utility mapping

Inspect internal structures and identify voids under; roads, airports, bridges, tunnels, railways, dams and buildings. Locate plastic, concrete, clay- or metal pipes. Map concrete before drilling, cutting or coring. Detect obstacles in front of directional drilling operations

Military and security

Locate tunnels, bunkers, hidden weapons and drugs. Find land mines and unexploded ordnance (UXO). Through wall imaging.

Rescue operations

Locate trapped victims under collapsed buildings & landslides.

Environmental

Locate hazardous waste, UST-location. Delineation of contaminant plumes and product spills. Map shallow lakes and rivers.

Agricultural and forestry


Locate agricultural and golf-green drainage tiles. Determine soil water content and conductivity. Map tree roots and rot in wood.

Geology and mining


Locate gemstone pockets in pegmatite. Find kimberlite, lateric nickel. Map internal structures and voids in soil. Locate cracks in bedrock and building stones.

Archaeology & forensics


Pre-excavation mapping of buried structures, foundations, burials and chambers. One of Radarteam Sweden AB most famous projects was when we discovered a 20.000 year old woolly mammoth, well preserved in the permafrost ground of Siberia. The project is frequently show cased by Discovery Channel, "Raising the Mammoth".

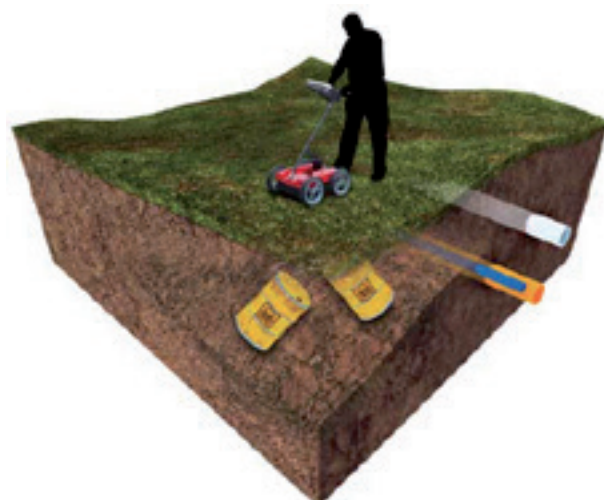


Best possible data quality

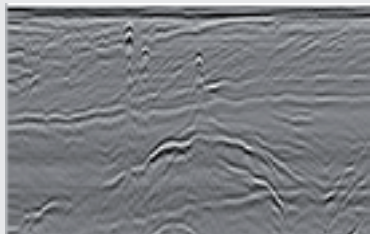


High resolution capacity

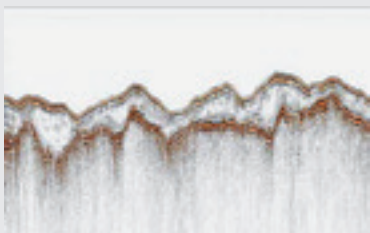


Airborne snow survey, raw data

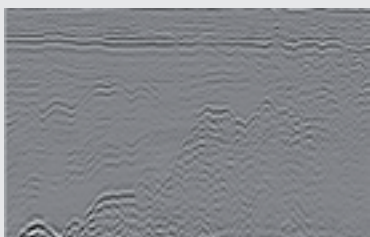

High penetration (9 m in silty sand)

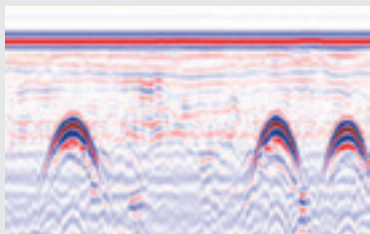

Large diameter concrete pipes

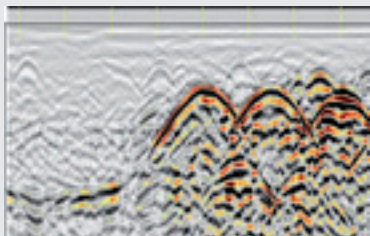

UST - Underground storage tanks



Road culverts at 6 meter depth

Cobra Locator GPR Technical Details

ANTENNA / GPR	Dual shielded antennas with integrated 2 channel Ground Penetrating Radar system
Antenna type	Cylindrical Butterfly Dipole (CBD-antenna), resistively loaded. Both air/ground-coupled operation
Peak frequency	250 MHz
Operating bandwidth	100 - 900 MHz
System performance	174 dB
Applied voltage	100 V
Sample rate	100,000 samples/s
Scan rate	1-100 scans/s @ 512 samples/scan
Sample output	16 bit digital raw data
CONTROL UNIT / CU	Rugged, MIL-STD-810F, water- and dust resistant, Panasonic Toughbook CF-19 laptop with bundled data acquisition, DAQ- software, for control, display, processing and storage of GPR-data.
Data format	Geoscanners Data Format (.gsf)
Data channels	1 or 2 with individual settings for depth, filter and gain (2 optional)
Vertical filters	Low-pass and High-pass FFT (Boxcar 1st order)
Horizontal filters	Stacking, background removal
Gain points	1 - 2 Linear gain
Gain levels	-20 to +60 dB
Data storage	Raw or Processed realtime data storage. Auto save or save on command.
Data file size	Limited only by available HDD-space (80 GB for Control Unit)
SURVEY CART	Integrated cart with mounting bracket for CU. 12" removable non-inflatable wheels with SW-encoder.
ENVIRONMENTAL	
Temperature	-20°C to 40°C
Humidity	96% non-condensing
Ingress protection	IP68 (Power, USB, SW-encoder connectors)
MECHANICAL	
Size (L x W x H)	52 x 40 x 19 cm (20 x 16 x 7,5 in)
Weight	16 kg (36 lbs)
OPERATING	
Operating platforms	Airborne operation, high speed air-coupled operation, ground-coupled operation
Battery	External Li Ion: 10,8V (6,6 Ah), 71 Wh
Operating time	6 - 8 hours
Operating mode	Time (1-100 scans/s), Distance (SW-encoder)
GPS positions	GPS positions integrated with GPR-data for every scan in both time- and distance mode
Operating depth	Shallow - Medium - Deep range (32, 64, 128 ns). 2,5 - 5 - 10 m @ v=0,15 m/ns (er=4)
ACCESSORIES	
Hardware	Helicopter survey kit, High speed road/Railway kit, Rugged terrain kit
Software	GPRSoft Post processing software for Cobra Locator Data (.gsf-format) DAQ-2 channel, 3D-Module



The new Leica Disto range is the most advanced range of hand held laser distance meters in the world. All Disto models are accurate to within $\pm 1\text{mm}$, and come with a 3 year international warranty upon online registration.



Disto D110 # LG808088

The world's smallest laser distance meter with integrated Bluetooth® Smart technology. By using its precise measurements users can create floor plans and sketch easily by connecting it with the Leica DISTO™ sketch app on a smartphone or a tablet.



Disto D210 #LG783648

Compact and handy with Power Range Technology™. Measures to 80 metres, IP54 weather proof, bright screen, automatic multifunctional end-piece.



Disto X310 #LG790656

This Disto is water, dust and shock proof to IP65, and includes an in-built 360 degree angle sensor and 80m range.



Disto D3A BT #LG776747

Bluetooth enabled Disto, with the ability to transfer data wirelessly to a Bluetooth enabled device. 100m range.



Disto D510 #LG792290

Large colour screen, digital view finder, Bluetooth and 360° tilt sensor in one. Power Range technology can measure up to 200 metres to a target plate.



Disto D810 #LG792297

The most versatile laser distance meter in the world! Equipped with a large colour display, digital view finder, tilt sensor and Bluetooth, this model will perform for the most demanding users.

Model	Range	Tilt Sensor	Bluetooth	Viewfinder
Disto D110	60m	NO	YES	NO
Disto D210	80m	NO	NO	NO
Disto X310	80m	YES 360°	NO	NO
Disto D3A BT	100m	YES $\pm 45^\circ$	YES	NO
Disto D510	200m	YES 360°	YES	YES
Disto D810	200m	YES 360°	YES	YES

Leica Disto Accessories



GZM26 #LG723385

GZM26 target plate (flat A4 size)
210 x 297mm.



GZM27 #LG723774

GZM27 target plate (Plus section)
73 x 98mm / 147 x 98mm.



GZM30 #LG766560

GZM30 target plate. 274mm x 197mm.



Leica Tripod TRI 70 #LG794963

- Aluminium tripod with easy fine adjustment
- Working height from 0.40m to 1.15m



GLB30 #LG780117

Made by UVEX Germany, super light laser visibility glasses for better visibility of laser dot outdoors, with 3 different lenses; laser visibility, safety glasses and sun glasses.



FTA360 adapter #LG799301

- Stable adapter with fine adjustment for convenient and accurate aiming
- Minimized measuring deviation for indirect measurement
- Fits perfectly on Leica TRI70 and TRI100 tripod

Leica Tripod TRI 100 #LG757938

- Aluminium tripod with easy fine adjustment
- Working height from 0.70m to 1.72m

Item number	Description
LG780117	Leica Disto glasses with 3 interchangeable lenses; clear (safety), tinted (sunglasses) and red (laser).
LG723385	Disto GZM26 target plate (flat A4 size - 210 x 297mm)
LG723774	Disto GZM27 target plate (73 x 98mm / 147 x 98mm. Used for interior work.)
LG766560	Disto GZM30 target plate (274 x 197mm)
SLKF630	SLIK Tripod for Disto/ Lino
LG794963	Disto TRI 70 Tripod for fine adjustment
LG723774	Disto TRI-100 TRIPOD, Fine adjustment
LG769459	Disto LSA360 adapter for pole or tripod
LG778359	Disto TA360 adapter for 1/4" thread tripods
LG766560	Disto Plastic target plate. 274 x 197mm
LG667169	Disto soft carry case
LG788956	Leica UC20 AAA battery charger, includes 2 x AAA batteries.
LG799301	FTA360 adapter



Complete 3D Measurements

Stay in control - in whatever shape of room. Capture and record distances, areas, inclinations, and angles effortlessly, even for inaccessible points. Forgotten measurements and handwriting errors are things of the past.



Room scan

Whether in fully automatic or manual mode: you can measure complete rooms, walls, windows, structural connections or stairs – from only one station point.



Projector

Whether ceiling grid or project layout for floors or walls – the Leica Disto 3D projects your design onto any surface – point for point.



Tools

Quick tools inspire the user: establish plumb, create level reference points, or precisely transfer offsets or locations.



#LG784357



It can do everything

- Measure plan position, height and distance, in all three spatial axes
- Intuitive user guidance
- Measure from one station – every visible point can be measured by targeting with the visible laser dot – without the need to walk to the target
- Measure to difficult-to-reach points, such as roof edges
- As-built records of ceiling, floor and roof surfaces, volumes, inclination, falls, height differences, angles
- Plumbing of points, parallel offsetting of axis, levelling, transferring levels from wall to wall. Forget spirit level and measuring tapes!
- Realtime display of measurements as drawings on the screen
- Camera display to aid in positioning points.
- Pocket calculator
- Record and export in the form of standard tables, photos, DXF files, and text files to USB stick.



Leica DISTO™ D810 touch carrying case

The professional package for convenient aiming and precise measurement.

The new Leica DISTO™ D810 touch carrying case is the professional package for convenient targeting and precise laser distance measurement. It includes the Leica DISTO™ D810 touch, the Leica FTA360 adapter and the Leica tripod TRI70. Everything comes together in an attractive and robust carrying case.



Leica DISTO™ and Lino carrying case

The professional package for easy measuring and alignment.

This package was specifically designed for interior applications. It combines everything that you will need for accurate and reliable measuring and alignment. The laser distance meter Leica DISTO™ D210, the cross line laser Lino L2 and the tripod TRI 70 are stored safely and ready-to-use in the robust, attractive and functional carrying case. Keeping your tools in the convenient carrying case also ensures that nothing will be lost or forgotten. The tools are compact, handy and easy to use.





Rugby range

The Leica Rugby range of lasers are the most comprehensive line of lasers on the market and are built to survive the rough and tumble of any construction site. Whether you need a laser for grading, horizontal or vertical levelling, the Leica Rugby range has the model to suit your needs and budget.

Rugby Lifetime Manufacturer's Warranty

The warranty is covered for the entire product lifetime. This includes a free of charge repair or replacement for all products that suffer defects as a result of faults in materials

Rotating Lasers

Technical data	Rugby 610	Rugby 620	Rugby 640	Rugby 670	Rugby 680	Rugby 810	Rugby 820	Rugby 830	Rugby 840
Weight	2.38 kg	2.56	2.56 kg	2.56 kg	2.56 kg	3.0 kg	3.0 kg	3.0 kg	3.0 kg
Self Levelling	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Laser Class	2	2	2	2	2	2	2	2	2
Grade	-	Single	Dual	Single	Dual	-	Dual	Dual	Dual
Dial in Grade	-	-	-	Yes	Yes	-	-	-	-
Vertical	-	-	Yes	-	-	-	-	-	Yes
Plumb up	-	-	Yes	-	-	-	-	-	Yes
Smart Targeting/ Smart Lock	-	-	-	-	-	-	Yes	-	Yes
Smart Slope	-	-	-	Yes	Yes	-	-	-	-
Accuracy	± 2.2 mm at 30 m	± 1.5 mm at 30 m				± 1.5 mm at 30 m			
Grade range	-	± 8% SG	± 8% DG	± 8% SG	± 8% DG	± 10% DG	± 10% DG	± 10% DG	± 10% DG
Rotation – RPS	10	10	0, 2, 5, 10	10	10	10 rps	10 rps	10 rps	0, 2, 5, 10
Scanning – degrees	-	-	10°, 45°, 90°	-	-	-	-	-	10°, 45°, 90°
Scango	-	-	Yes	-	-	-	-	-	Yes
Range (diameter)	600 m	800 m	600 m	800 m	800 m	1,100 m	1,100 m	1,350 m	700 m
Remote Control	-	-	Yes	-	-	-	-	-	Yes
Li-Ion batt. / hours operation	40+ hours					50+ hours			
Alkaline batt. / hours operation	60+ hours					60+ hours			
Seal (both excluding and including battery pack)	IP67					IP68			
Warranty	3 year warranty on registration					5 year warranty on registration			



Fit, fast, tough – Select the perfect team player for your site

Leica Rugby lasers are the toughest rotating lasers suitable for all construction applications. Level, align and square much quicker than ever before, eliminating costly errors and downtime.



Leica Rugby 610

One button simplicity

- Simple and reliable, one button laser where no mistakes are possible
- Superb performance with all Leica Rod Eye receivers – extend your working range using the Rod Eye 140 Classic and the Rod Eye 160 Digital



Leica Rugby 620

Simple & reliable - no mistakes possible

- Concrete forming, pad placement and framework levelling; setting foundations and footings has never been more efficient
- Slope matching up to 8% in single axis



Leica Rugby 640

Versatility inside and outside

- Fit for any interior and exterior levelling, aligning and squaring application
- Scan 90 – make layout easier by quickly moving the beam to the left or right side



Leica Rod Eye Basic

#LG769811

One button simplicity

- **LCD Indication:** two clear displays on the front and back of the receiver
- **Audio Indication:** two settings, high for noisy outdoor jobs and low for indoor applications
- **Automatic Shutoff:** after ten minutes to conserve battery life
- **Grade Rod Bracket:** with integrated level vial ensures your grade rod is plumb and improves the reading accuracy
- **Built-in clamp:** the vial ensures good alignment & improves reading accuracy
- **Protective Overmold:** protects the receiver from possible accidents on tough jobsites



Leica Rod Eye 140 Classic

#LG789923

- Step up with increased capture height & working distance with Leica Rod Eye 140 – with the built-in 12 cm (5") detection window you can easily



Leica Rod Eye 160 Digital

#LG789924

- Professional receiver with digital readout, half millimetre accuracy and strobe rejection
- Capture digital readout for convenient

Leica Lino Laser Levels

The best in the industry! With Leica Linos everything is plumb and perfectly aligned. They project lines and points to millimeter accuracy, leaving your hands free to get on with the job. All Linos have a 3 year warranty (upon registration).

All Leica Linos have:

- Range of 15m, more than 30m with detector.
- Accuracy @ 5m - ± 1.5 mm
- Self levelling - $4^\circ \pm 0.5^\circ$
- Protection – IP54, IP65 for L360.
- Locking switch for laser module.



Lino L360 #LG790509



Lino L2+ #LG783711



Lino L2P5 #LG777069



Lino P5 #LG777068

Leica Lino Lasers

Item Number	Model	Description	Accessories
LG783711	Lino L2+	Cross line laser	Hard carry case, soft carry case, batteries, target, & magnetic bracket
LG790509	Lino L360	360° horizontal line and 180° vertical line	Hard carry case, target plate, mini tripod adapter, batteries & charger.
LG777068	Lino P5	5 point vector	Hard carry case, soft carry case, batteries, target, & magnetic bracket
LG777069	Lino L2P5	5 point and cross line laser	Hard carry case, soft carry case, batteries, target, & magnetic bracket

Accessories

Item Number	Model
LG780117	Laser Glasses
LG784962	RVL100 Laser Receiver
LG794963	Tripod
LG758832	Mini Tripod
LG758839	Wall bracket
LG761762	CLR-290 Ceiling Pole 2.9m



RVL100
#LG784962

Receiver for Lino L2P5, L2+ and LINO L360

For finding red pulsed laser beams over longer distances or in difficult light conditions.

- Localizes the laser beam at a distance of up to 80 m
- Large reception window of 42 mm to find the laser beam quickly



CLR-290 ceiling pole
#LG761762

Tuf Laser Levels




Tuf Lasers offers a range of lasers at an unbeatable price. All Tuf Lasers come with a 1 year warranty.



Tuf Red Laser #TUFXLINER

Tuf Red Crossline laser for quick and easy level and vertical line. Compact, easy to set up, easy to carry.



Tuf Green Laser #TUFXLINEG

Tuf Green Crossline laser for quick and easy level and vertical line. Compact, easy to set up, easy to carry.



TUF 3 Plane Cross Laser #CL360X3



M-Line #MCL4V3H

4 vertical, 360 degree horizontal laser, and plumb dot laser. Comes complete with receiver, target, glasses and carry case.



H1 #RH500

Horizontal rotating laser with manual dual axis grade. Comes complete with receiver, remote control, glasses and carry case.



HVG #RHVP500G

Green laser horizontal and vertical rotating laser with plumb up and manual dual axis grade. Comes complete with receiver, remote control, glasses, wall mount bracket and carry case.



Tuf Cross Line #TUFXLINE2P

Horizontal and vertical cross line laser with plumb up and plumb down. Comes complete with glasses, target, bracket and case.

Accessories

Item Number	Description
WM-3B	Wall mount bracket
FRA-1	Tripod spacer for M-Line
TUFTARGETR	Tuf Laser Target - Red
TUFTARGETG	Tuf Laser Target - Green



The world's smallest pipe laser.

Leica Piper 100 #LG748704 and Piper 200 #LG748710

The Leica Piper series of pipe lasers are perfect for storm and sanitary sewer construction, gravity flow pipe line and anywhere grade and line are required with a single beam.

Built with rugged aluminium housing, Piper lasers perform exceptionally well in the toughest conditions. The Piper is the only laser piper laser in the world

that fits inside a 100mm (4 inch) pipe, making it the perfect tool for road crossings or tight culverts.

Alignmaster is Leica patented technology in the Piper 200.

The laser searches and finds the target for quick second day setups.

Model	Piper 100	Piper 200	QL-125
Item Number	LG748704	LG748710	QBL6005213
Display	Digital	Digital	Digital
Alignmaster	No	Yes	No
Line & Grade Locks	Yes	Yes	Yes
Line Adjustment	6m @ 30m	6m @ 30m	6m @ 30m
Self-levelling	-15 % to +30 %	-15 % to +30 %	-15% to +45%
Grade range	-10 % to +25 %	-10 % to +25 %	-10% to +40%
Grade entry	Direct or by remote	Direct or by remote	Direct or by remote
Working range	200m	200m	300m
Remote control	Yes, wireless	Yes, wireless	Yes, wireless
Housing	Aluminium	Aluminium	Aluminium
Operating time	40 hours	40 hours	30 hours
Charging time	4 hours	4 hours	1 hour
Battery pack	GEB221 Li-Ion	GEB221 Li-Ion	Li-Ion
Waterproof	IPX8 – 9m	IPX8 – 9m	IPX8 – 9m
Diameter	100mm	100mm	125mm
12V cable	No	No	Yes



QBL QL125 Pipe Laser #QBL6005213

The QL 125 pipe laser is designed for use when space is limited. Its short length means the laser can be used in tight bends and narrow manholes with a minimum pipe diameter is 125 mm. The robust cast-aluminium housing is a common feature of QBL's pipe lasers. A compensator sensor reliably compensates for external vibrations, allowing for more accurate levelling.

Features include:

- Manual alignment with remote control
- Lithium-ion batteries
- Manual cross axis levelling
- Clear display
- Inclination angle of -10% to +40%
- Remote control
- Long 300m range

Digital Spirit Levels

DigiPas

Digipas units are the quick and accurate way of measuring angles. All are made of a strong ABS polymer with an aluminium base and built in magnet. All have a crisp LCD to display angles in degrees and percentage slopes. Calibration can be performed by the user very quickly.

Model	DWL-8o Pro	DWL-18o	DWL-28o
Range	0° to ±90°	0° to ±90°	0° to ±90°
Resolution	0.05°	0.1°	0.1°
Accuracy	±0.05°	±0.2°	±0.2°
L x W x H (mm)	107 x 55 x 18	95 x 48 x 22	200 x 43 x 18



DWL-8o Pro #519697
Pocket digital mini level.



DWL-18oS #519696
Turns a bubble spirit level into a digital spirit level.



DWL-28o Torpedo Water Proof #519688
DWL-28o Torpedo #519699
200mm long mini digital spirit level.



Smart Tool 20cm Module
#519752



Smart Tool 120cm #519751
The original digital spirit level

SmartTool – The original digital spirit level

SmartTool is the industry standard digital level. Extremely durable and easy to calibrate, it will keep its accuracy for years.

Features include:

- Digital display with backlight.
- 1mm accuracy per meter.
- Display in degrees, inches/feet, or percent.
- Hold button to retain measured value.
- Audible beep at level or plumb.
- Very strong railing.
- Easy to calibrate.
- 9V battery included.



Magnetic bracket for Smart Tool Module #519769

Smart Tool cover 60cm #7130750

Smart Tool cover 120cm #7130751

Smart Tool cover module #519132



Smart Tool 60cm #519750



Smart Tool 60cm with laser
#519754

Survey Accessories – Batteries

The batteries available from Leica Geosystems are of the highest quality in respect of temperature tolerance, recharging capability, operating time and cycle behaviour.



GEB111 #LG667318



GEB121 #LG667123



GEB187 #LG667147



GEB212 #LG772806



GEB221 #LG733270



GEB222 #LG793973



GEB242 #LG793975



GEB77 #LG439149

Leica Batteries

Item Number	LG667318	LG667123	LG667147	LG772806	LG733270	LG793973	LG793975	LG439149
Model Number	GEB111	GEB121	GEB187	GEB212	GEB221	GEB222	GEB242	GEB77
Chemistry	NiMH	NiMH	NiMH	Li-Ion	Li-Ion	Li-Ion	Li-Ion	NiCd
Output	6V / 2.1Ah	6V / 4.2Ah	12 V / 1.8Ah	7.4V / 2.6Ah	7.4V / 4.4Ah	7.4V / 6.0 Ah	14.8 V / 4.8Ah	12V / 1.2 Ah
Instrument	TPS400/800 & DNA	TPS400/700 & Builder	TPS1000 & TPS2000	Field Controllers & GNSS Receivers	System 1200, TS11/12/15, Flexline, GS10 GNSS, Piper 100/200	TS11/12/15, Flexline, GS10 GNSS, Piper 100/200	TM30 / TS30, Nova TM50 / TS50 / MS50	TPS1000

Survey Accessories – Batteries



GEB63 #LG394792



GEV208 #LG749279



GEV71 #LG439038



GEV186 #LG734697



GEB171 #LG727367

Leica Accessories

Item Number	LG727367	LG739279	LG439038	LG394792	LG749279	LG734697
Model Number	GEB171	GEV208	GEV71	GEB63	GEV208	GEV186
Chemistry	NiMH	Mains	12V car battery		Mains	
Output	12V / 9Ah	12V / 9Ah	12V / 9Ah	12V / 9Ah	12V / 9Ah	12V / 9Ah
Description	External Battery	Power Supply	12V cable	Battery Box	Power Supply	Y-Cable RX/TCPS




Toshiba batteries are powerful, highly reliable batteries which use manganese dioxide for the cathode active material and zinc powder gel for the anode active material. The electrolyte is an alkaline solution.

Toshiba Batteries – 2 pieces

Item Number	TSLR3SP	TSLR6SP	TSLR14SP	TSLR20SP	TS6LR61SP
Model	AAA	AA	C	D	9V

Survey Accessories – Chargers

Leica Geosystems chargers ensure the fastest recharging time and the longest life span of Leica batteries.

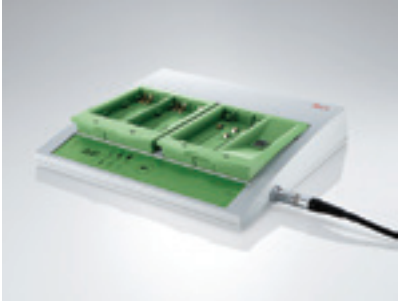

GKL221 #LG733271

N.B. Charger plates not included.



GKL211 #LG734752



GKL112 #LG734753



GKL32 #LG785703

Chargers

Item Number	LG733271	LG734752	LG734753	LG785703
Model name	GKL221	GKL211	GKL112	GKL32
Battery	Use adapter	GEB211, GEB212, GEB221, GEB222	GEB121, GEB111	GEB77, GEB171, GEB187
Number of batteries	5	1	1	1



GDC221 #LG734389



GDI221 #LG733323



GDI222 #LG733322

Adapters for GKL221

Item Number	LG734389	LG733323	LG733322
Model name	GDC221	GDI221	GDI222
Battery		GEB211, GEB212, GEB221, GEB241	GEB121, GEB111
Type	Car adapter cable	Adapter plate	Adapter plate

Survey Accessories – Chartwell Field Books

Chartwell field books are made to the highest specification using quality strength paper with high cotton content. They provide excellent tear resistance when wet. Strength and writing surface is retained when dried even after being subjected to extreme weather conditions. All books come with 160 pages printed with permanent waterproof ink. Covers can be wiped clean, fold flat, and are sewn in sections with nylon thread to withstand the most demanding environments.



Item number	Model	Description	Size (w x h)	Description
92291	2291	Watershed - Notebook	156x101mm	Ruled notebook, wire bound, waterproof, write underwater
08207026	2226	Field Book	192x120mm	Ruled notebook
92126	2126	Field Book	106x205mm	Ruled 2 red centre lines without feints
92006	2006	Field Book	130x205mm	Ruled 2 red centre lines without feints
92026	2026	Field Book	130x205mm	Ruled 2 red centre lines with blue feints.
92106	2106	Traverse	106x205mm	Ruled 2 red centre lines with blue feints.
92206	2206	Traverse	106x165mm	Ruled 2 red centre lines with blue feints.
92056	2056	Graph paper	130x205mm	1/10" and 1/2" grey graph and 2 red centre lines.
92416	2416	Levels: Rise & Fall	192x120mm	For surveying with a level
92426	2426	Levels: Collimation	192x120mm	For collimating levels
92557	2557	Tache Theodolite	192x120mm	For use with a theodolite
92567	2567	Tache auto redn	192x120mm	For use with an automatic level
92637	2637	Mining 5mm Graph	192x120mm	Horizontally ruled pages opposite 5mm square graph pages
92647	2647	Mining 2mm Graph	192x120mm	Horizontally ruled pages opposite 2mm square graph pages

Survey Accessories – Compasses & Clinometers

Silva is the leading manufacturer of compasses worldwide, starting in 1933 with the invention of the first liquid filled compass. The head office is situated north of Stockholm in Sweden.



Silva Survey Master #7090278

This instrument is a combination of the SightMaster compass and the ClinoMaster clinometers in one, allowing you to measure vertical angles to $\pm 90^\circ$ and compass bearings through site or on the dials.



Silva SM360 LA Compass #7090270

The SM360 LA has a site and dial to measure accurate compass bearings.

Case available #7090450



Leather pouch for Silva Survey Master #7090450

Suited for the Silva Survey Master, this high quality leather pouch will protect the clinometer.



Silva ADC Summit #7090263

Functional wind gauge and altimeter. Collected data can be transferred to a PC using ADC IR (accessory).

Functions include:

- Wind gauge, max and average wind speed
- Thermometer, Celsius or Fahrenheit
- Altimeter, precise to 1 metre
- Barometer, with 24 hours history
- Clock with alarm
- Stopwatch, with split times and countdown timer



Silva Clinometer 131 #7090246

With two scales, one $\pm 35^\circ$ and a fine tuning scale $\pm 5^\circ$, the 131 model is used on grading and earth moving equipment for levelling. For angles up to $\pm 5^\circ$, read the top precise scale, for angles over $\pm 5^\circ$, use the lower scale for readings up to $\pm 35^\circ$.

Survey Accessories – GME Radios

GME is an Australian manufacture of high quality radio communications equipment. The most popular UHF radio we sell is the TX650. We can source any GME model to suit your requirements.



**GME TX-670
Twin UHF Radio Pack**

#GMETX670

The TX670 is GME's most compact UHF 40 channel radio, at just 12mm thick.

Features:

- Ability to scan through all 40 channels.
- 5 different calling tones.
- Ability to monitor two channels at once.
- Power save mode when not in use.
- CTSS- select on of 38 codes per channel.
- Key pad lock.
- VOX - Talk without pressing the transmit button.
- Roger beep.
- LCD Display.
- Only 12mm thick.
- Transmits 1W or 0.5W at close range.

Comes complete with 2 rechargeable radios, cradle charger, AC adapter, 2 ear mics, and 2 neck lanyards.



GME LCM7000 carry case
#7090710



**GME TX610 Speaker
microphone** #7090705



GME TX650 car charging kit
#7090762



GME HS6000 head set #7090713

Survey Accessories – Measuring tapes



Tajima Engineer Steel



Tajima Symron Fibreglass



Tajima Engineer Plastic Coated Steel



Tajima Hi-Lock



Tajima G-Lock Fibreglass

Symron Tapes

High quality fibreglass tapes with end hooks.

30m fibreglass - #6400030

50m fibreglass - #6400032

100m fibreglass - #6400034

Tajima Tapes

G-Lock measuring tapes

The original “armoured” tape measures with the thick elastomer cover that protects the tape casing and end hook and provides a comfortable, sure grip. Compact and smooth working tapes, with superior engineering and easy-to-read crisp, clean scales imprinted on white backgrounds. In standard, metric and standard/metric dual-scale models.

25mm wide, 7m long - #6100056

25mm wide, 8m long - #6100057

25mm wide, 10m long - #6100059

Hi-Lock measuring tapes

Compact and smooth working tapes, engineered with heavy-gauge ABS casings, triple-riveted end hooks and cushioned return stops. All feature easy-to-read crisp, clean scales imprinted on white backgrounds, in standard and standard/metric dual-scale models.

16mm wide, 3m long - #6100054

19mm wide, 5m long - #6100055

25mm wide, 5m long - #6100058

25mm wide, 7m long - #6100052

Engineer Tapes

High quality tapes with end hooks, all featuring crisp, clean scales. Available in fibre glass or steel.

30m plastic coated steel - #6300031.

50m plastic coated steel - #6300032

100m steel - #6300037

Tape Refills

100m Symron

30m Engineer #6900001

50m Engineer #6900002

100m Engineer #6900006

Survey Accessories – Measuring wheels



Geo Fennel M10 #519090
1m circumference. With carry bag.
Measures to 10,000m.



Measuring wheel bag 416 #519139

Survey Accessories – HPRC Cases

HPRC – High Precision Resin Cases

HPRC cases are designed tough for any purpose, including: survey, photography, military, police, naval, and much more.

Manufactured and designed in Italy, HPRC cases are made to the highest standards, and protect your equipment from dust, water, impacts, corrosion and chemical agents.

All HPRC cases come with a life time unconditional warranty. Sizes range from small flash card cases all the way to large wheeled trunks.

For more information, visit www.hprccases.com.au



Survey Accessories – Memory

Losing data after a work-filled day is frustrating and expensive. The electronic accessories from Leica Geosystems comply with a higher standard than the commercially available accessories that meet consumer or even industry standards. The storage media and other data transfer products from Leica Geosystems are qualitatively of extremely high value and reliability.



MCF256 – 256MB
#LG733257



MCF1000 – 1GB
#LG745995



MCF8000 – 8GB
#LG772567



MCFAD – Compact flash adapter
#LG733258



MS1 – 1GB
#LG765199



MMSDo1 – Micro SD 1GB
#LG795993



MSD1000 – 1GB
#LG767856



MSDo8 – 8GB
#LG789139

Model Name	Capacity
MCF32	32 MB
MCF256	256 MB
MCF1000	1 GB
MCF8000	8 GB
MCFAD	Compact flash adapter
MS1	1 GB
MMSDo1	1 GB
MSD1000	1 GB
MMSDo8	8 GB
MCR5	CF
MCR7	SD/CF
MCR8	SF/CR/RAM



MCR7 – SD/CF
#LG767895



MCR8 – SF/CR/RAM
#LG776240

NB: MCFAD is required for to use TPS1100 and DNA instruments.

Survey Accessories – Miscellaneous

Model	Description
Tajima	
6600019	450G Magnetic Plumb Bob
Survey Nails	
7090723	25mm
7090719	43mm
7090720	55mm
7090722	80mm
Nail Washer	
7090736	Nail washer for 7090723 & 7090719
7090721	Nail washer for 7090720 & 7090722
Field Bags	
7090461	Field bag long 10 pocket
7090460	Field bag short 10 pocket
7090418	Field bag belt
Markers	
7290550	Maruzen marker
7290545	Maruzen replacement tips.
7290572	Ideal Marker (Black)
7290570	Ideal replacement tips.
Leviathan #3 Crayons Box of 12	
7090331B	Black
7090331BL	Blue
7090331R	Red
7090331W	White
7090331Y	Yellow
Optical Squares	
A07-5010	Double penta prism optical square.
Tally Counters	
7090031	Tally counter with bracket
7090030	Tally counter hand held
Screen Protector	
LG767907	SPFo1 - Anti glare screen protector
Laser Signs	
7050193	Laser safety sign
7050194	Stick on laser safety sign
JackJaw	
7090364	JackJaw Short
7090371	JackJaw Tall



#A07-5010
Double penta prism optical square.



#7090331 Leviathan #3 Crayons



#7290550 Maruzen marker



#LG767907
SPFo1 - Anti glare screen protector



Survey Nails
25mm, 43mm, 55mm, 80mm



Washers for nails
#7090736, #7090721



HP50G #7310532
2D and 3D graphics calculator with more than 2,300 built in functions. 2.5MB memory with SD card slot.



HP35S #7310599
Scientific calculator with RPN or algebraic logic. 30KB memory.



JackJaw #7090364, 7090371
Ideal for lifting form pins, stakes and star pickets out of the ground.

Survey Accessories – Miscellaneous



Tajima Plumbrite #6600019



10 pocket field bag
Short #7090460
Long #7090461



#7090462 Field bag belt



Tally counter #7090030



Tally counter with mount
#7090031



Laser safety sign #7050193
Stick on #7050194



PQR NUTS – Precision, Quality, Reliability.

Made from stainless steel, with an easy to grip design and short thread for quick on off movement, PQR Nuts are the perfect tool for bolt surveys.

With PQR Nuts, you can:

- Find the centre of bolts every time for use with mini prisms,
- increase speed and efficiency of surveys with no additional corrections needed, and
- maximise the accuracy of your survey results.

PQR Nuts are available in 2 packs.

5 Pack #PQR NUTS

Includes: M16, 20, 24, 30 366, 20, 24, 30 36

11 Pack #PQR NUTS 11PK

Includes: M16, 20, 22, 24, 30, 33, 36, 42, 48, 56 & 5/8"

Custom made and non-metric sizes can be made to order.

Survey Accessories – FPM Plummets

FPM offer a range of highly accurate laser and optical Nadir and Zenith plummets made in Germany. They have the ability to adopt to almost every customer's requirement and, if necessary, can manufacture specific solutions for individual cases.



FG-L100 – Zenith Plummets

Measuring accuracy	
Mean square plumb line error at 100 m ±1 mm	
Telescope	
Image position	erect and true-to-side
Magnification	32 x
Shortest target distance	2.2 m
free objective diameter	40mm
Compensator	
Working range	±10´
Mean square setting error	±0,15 "
Temperature	
Operating range	-25°C to +45°C
Instrument	
Magnification	32 x
Dimensions	180 x 180 x 340mm
Weight	3.5 kg



FG-L30 – Zenith & nadir plummet

Measuring accuracy	
Mean square plumb line error at 30 m ±1 mm	
Telescope	
Image position	upside down, side-inverted
Magnification	9 x
Shortest target distance	0.4 m
free objective diameter	20 mm
Bubble level	reversion bubble level 20" / 2 mm
Instrument	
Dimensions	140 x 190 x 120mm
Weight	2.2 kg



**FG-LL-30/-31 Zenith
FG-LL-32/-33 Nadir**

Both laser Zenith and Nadir come with low power (approx. 200m) or high power (approx. 500m) options. This is an ideal solution for mining or construction applications where longer range laser plumbing is required. Adjustments can be made in the field without having to open the device

Technical specifications

Laser class FG-LL30/-32: 2, < 1 mW
Laser class FG-LL31/-33: 3 R, < 5 mW
Laser: diode laser, visible red, 635 nm
Beam diameter: 13 mm at laser
Range FG-LL30/-32: 200 m
Range FG-LL31/33: 500 m
Self-levelling range: ± 5 %
Permissible deviation: ± 0.005 %
Operating time: 26h
Low battery cut-out: yes
Watertight: 3.5 m
Temperature range:- 10° C to + 50° C
Weight: 3.4 kg

Accessories:



**FG-DFXI
Tribrach with circular bubble**



**FG-USDFXI
Conversion kit.**

Survey Accessories – Pentax Binoculars

Pentax binoculars are made of the finest optics. All models comes with a case. We carry the full range of Pentax binoculars and spotting scopes. Below are our top selling items. Pentax binoculars come with a 1 year warranty and carry case.



8 X 21 UCFR #62209

Magnification: x8
Objective diameter: 21mm



10 X 25 UCF XII #62212

Magnification: x10
Objective diameter: 25mm



16 X 50 XCF #65793

Magnification: x16
Objective diameter: 50mm



20 X 60 PCF WP II #65810

Magnification: x20
Objective diameter: 60mm
Top of the range model.

Survey Accessories – Pentax and Ricoh Cameras

CR Kennedy is the sole importer of Pentax and Ricoh for Australia, and stocks the full range of compact cameras, SLRs, and lenses. For the best prices on current models, please contact a CRK sales representative.



Survey Accessories – GPS Accessories



GHT63 #LG767880



GHT62 #LG767879



GHT61 #LG767877



GHT58 #LG748417



GHT39 #LG733264



GVP644 #LG767905



GAD109 #LG767791



Bull bar mount #R8SPS



GAD108 #LG767790

GPS Accessories		
Item Number	Model Number	Description
LG767880	GHT63	Clamp for attaching GHT39 to pole
LG767879	GHT62	Holder plate for GHT39
LG767877	GHT61	Handstrap for Leica Controllers
LG748417	GHT58	Tripod bracket for GFU Radio
LG733264	GHT39	Bracket for RX1200 on pole
LG767905	GVP644	Soft carry bag for CS15 controller
LG767791	GAD109	GS15 to TNC adapter
LG767790	GAD108	Arm to mount external antenna
LG784918	GHT72	Pole holder base plate for attaching CS25 tablet computer
R8SPS	R8SPS	GPS bull bar vehicle mount

Survey Accessories – Planimeters

Tamaya digital planimeters are excellent tools to use when measuring irregular-shaped areas on plans or drawings. They eliminate the need for grids, charts, or calculations done by hand.



Tamaya Planix 7 #08206962



Tamaya Planix 10S #08206964



Tamaya Planix Ex #08207000

Planix Planimeters			
Model	Planix 7	Planix 10S	Planix EX
Item Number	08206962	08206964	08207000
Accuracy	±0.2%	±0.1%	±0.1%
Range	300cm x 30cm	300mm x 100mm	380mm x 100mm
Functions	Area, line length, side length.	Traces curves, plot points, averages.	Measures straight, curved or circular lines, coordinates, radii, angles, areas.
Battery Life	30 hours	20 hours	40 hours



Scalex Mapwheel SCMW
#SCALEX MAPWHEEL

This is the perfect tool, specifically designed for quickly taking scale measurements from maps. Just select the built-in scale factor to match the map and roll the MapWheel along any straight or curved line. The measurement is displayed instantly. Calculate road distances and fuel-costs easily.



Scalex Planwheel SA2
#SCALEX PLANWHEEL

The PlanWheel SA2 is the perfect tool for taking scaled measurements from blueprints, maps and plans. Just select the built-in scale factor to match the plan and roll the PlanWheel. The measurement is displayed instantly.



Scalex Protective Case
#SCALEX CASE

Made of high impact ABS, this rugged case provides the protection required on the job. With a hot-stamped Scalex legend and flocktex interior, the case can also hold an extra set of batteries.



Map wheel
#7290462

AC Adapter For Planix 7
#08206971

Battery for Planix 10S
#08206967

Survey Accessories – CST Poles



**CST 2.5m / 2 Section pole /
Twist Lock #534708**



**CST 2.5m / 2 section pole /
Quick Lock #532509**



**CST 2.5m / 2 section pole /
Quick Lock #534417**



**CST 3.6m / 3 section pole /
Quick Lock #534512**



**CST 4.6m / 4 section pole /
Leica spigot / 5/8 Thread
#534418 / 534416**

CST Prism Poles with Circular Bubble Level

Item number	534709	534708	532509	534417	534512	534416	534418	534216
Model	67-4708TML	67-4708TMA	67-4509TMA	67-4508TMA	67-4512TMA	67-4515TMA	67-4515TML	67-4215TMA
Height	2.5m	2.5m	2.5m	2.5m	3.6m	4.6m	4.6m	4.6m
Sections	2	2	2	2	3	4	4	4
Material	Aluminium	Aluminium	Aluminium (light)	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium (heavy)
Lock	Twist	Twist	Quick	Quick	Quick	Quick	Quick	Collet
Thread	Leica Spigot	5/8"	5/8"	5/8"	5/8"	5/8"	Leica Spigot	5/8"

CST Range Poles

Item Number	534400	523708
Model	68-3818	68-3708
Height	1.8m	2.4m
Sections	1	2



**CST range pole
#523708, 534400**

Survey Accessories – Leica Poles



GLS115

Provides prism heights of 100, 400, 700, 1000 or 1300mm.



From left to right:
GLS14, GLS11, GLS12, GLS13, GLS30,
GLS31, GLS111, GLS112, GZW12

Leica Poles

Item number	LG403427	519616	LG642106	LG385500	LG754391	LG78226	LG752292	LG766359	LG667309	LG667310
Model	GLS14	Nedo	GLS115	GLS11	GLS12	GLS13	GLS30	GLS31	GLS111	GLS112
Min height	-	-	100mm	1.24m	1.39m	1.39	1.36m	1.36m	1.4m	1.47m
Max height	0.2m	0.8m	1.3m	2.15m	2.0m	2.0m	2.0m	2.0m	2.60m	3.65m
Bubble	Circular adjustable	-	clip-on adjustable	Circular adjustable	Circular adjustable	Circular adjustable	Circular adjustable	Circular adjustable	Circular adjustable	Circular adjustable
Thread	Spiggot	Spiggot	1/4"	Spiggot	Spiggot	5/8"	5/8"	Spiggot	Spiggot	Spiggot
Material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Carbon Fibre	Carbon Fibre	Aluminium	Carbon Fibre

Accessories

Item number	LG403428	7316307	7316309	7316310
Model	GZW12			
Description	1m extension for spiggot	Flat shoe for GLS11	Flat shoe for GLS12	Flat shoe for GLS30

Survey Accessories – Leica Tribrachs



GDF321 #LG777508



GDF111-1 #LG748888



GDF101 #LG726839



GDF322 #LG777509




GDF112-1 #LG798181



GDF102 #LG726840

Model Name	Model Number	Optical Plummet	Torsional Stiffness
GDF321	LG777508	No	<1"
GDF322	LG777509	Yes	<1"
GDF111-1	LG748888	No	<3"
GDF112-1	LG798181	Yes	<3"
GDF101	LG726839	No	<5"
GDF102	LG726840	Yes	<5"



Tribrach Tester #7091111



GHM007 #LG667718



GHT196 #LG722045

Accessories

Model name	Model Number	Description
GHM007	LG667718	Height meter
GHT196	LG722045	Holder for GHM007
	7091111	Tribrach Tester

Survey Accessories – Carriers

Like all other Leica Geosystems accessories, Leica carriers distinguish themselves through outstanding quality features. The high precision carriers of the Professional 5000 Series offer you a choice between a carrier with laser plummet, or optical plummet and longitudinal bubble for high accuracy positioning. Professional 5000 carriers deliver an outstanding 0.3 mm centring accuracy, while the Professional 3000 Series offer a centring accuracy of 1.0 mm.



SNLL121 #LG667316



GRT144 #LG667313



GRT146 #LG667216



GRT247 #LG770715



GZR3 #LG428340



GZR103 #LG725566



GZR2 #LG360532

Item Number	LG667316	LG667313	LG667216	LG770715	LG428340	LG725566	LG360532
Model Number	SNLL121	GRT144	GRT146	GRT247	GZR3	GZR103	GRZ2
Plummet	Laser	Optical	Optical	None	Optical	Optical	None
Accuracy	0.3mm	1.0mm	1.0mm	1.0mm	0.3mm	1.0mm	0.3mm
Bubble	No	No	No	No	Yes	Yes	Yes

Accessories

Item Number	LG667217	LG667244	LG722045	LG667718
Model Number	GAD31	GZS4	GHT196	GHM007
Use	Screw to Stub adapter	Height hook	Tribrach Holder for GHM007	Instrument Height Meter



GAD31 #LG667217








GZS4 #LG667244

Prisms

Leica prisms are manufactured from high-quality optical glass which is worked to strict specifications. All reflective surfaces are provided with a resistant coating so that the reflectivity is not adversely affected by dirt or condensation.

Item Number	Model No.	Prism type	Holder	Centring Accuracy	Range	Comments
LG641617	GPR121	Circular	Yes	1.0mm	3,500m	
LG641618	GPR111	Circular	Yes	2.0mm	2,500m	
LG726295	GPR112	Circular	No	N/A	2,500m	Monitoring/Mining prism
LG753492	GPR113	Circular	Yes	2.0mm	2,500m	
LG362830	GPR1	Circular	No	1.0mm	3,500m	
LG639985	GRZ4	360°	No	5mm	2000m	
LG754384	GRZ122	360°	Yes	2.0mm	2000m	Can be used in SmartPole configuration
LG644327	GRZ101	360°	Yes	1.5mm	2000m	
LG641762	GMP104	Mini Prism	Yes	N/A	2000m	Monitoring Prism with L-Bar for fixed installation
LG641662	GMP101	Mini Prism	Yes	1.0mm	2000m	Includes bubble, target plate, spike and bag.
LG641615	GMP111	Mini Prism	Yes	2.0mm	2000m	Includes bubble, and GLS115 mini reflector pole
LG7643439	GMP112	Mini Prism	Yes	2.0mm	2000m	Includes 30cm height extension
LG642534	GMP111-0	Mini Prism	Yes	2.0mm	2000m	o constant prism. Includes bubble, and GLS115 mini reflector pole
LG644187	SMP222	Mini Prism	Yes	2.0mm	2000m	Sliding prism, o constant.
LG555631	GPH1P	Circular	Yes	0.3mm	3,500m	Compatible with Leica TDM5005 and TDA5005

Prism Dimension Information

Prisms	Constants [mm]	
Circular prism GPH1P	0.0	
Circular prism GPR121/111	0.0	
Miniprism GMP101	+17.5	
Miniprism GMP111* GMP111-0**	+17.5 0.0	
Reflective tape	+34.4	
Flat prism CPR 105	+34.4	
360° prism GRZ4	+23.1	
360° prism GRZ122	+23.1	
360° Mini prism GRZ101	+30.0	



GPR121 #LG641617



GPR111 #LG641615



GPR112 #LG726295



GPR113 #LG753492



GPR1 #LG362830



GRZ4 #LG639985


Survey Accessories – Prisms & Accessories



GRZ122 #LG754384



GRZ101 #LG644327

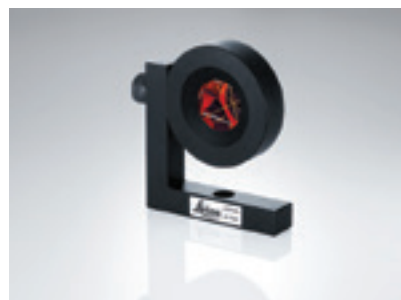

GMP104 #LG641762



GMP101 #LG641662



GMP111 #LG641615



GMP112 #LG742329



SMP222 #LG644187



GPH1P #LG555631



GLS115 #LG642106

Prism Accessories

Item Number	Model Number	Description	For
LG362820	GPH1	Prism Holder	GPR1
LG400080	GPH3	3 Prisms Holder	GPR1
LG726296	GHT112	Mounting Kit	GPR112
LG362823	GZT4	Target Plate	GPH1
LG727406	GDZ112	Rain Shelter	GPR112
LG642344	GVP608	Soft bag	GMP111, GRZ101
LG742329	GMP112	Pole extension	GMP111
LG743503	GAD105	Pole adapter	GMP111 prism to Leica Spigot adapter
LG742006	GAD103	Pole adapter	GRZ101 prism to Leica Spigot adapter
LG642106	GLS115	Mini reflector pole	GMP1111

Survey Accessories – Prism Accessories



GPH1 #LG362820



GPH3 #LG400080



GHT112 #LG727406



GTZ4 #LG362823



GDZ112 #LG727406



GVP608 #LG642344




GAD105 #LG743503



GAD103 #LG742006

Survey Accessories – Reflectors

Item Number	LG763532	LG763533	LG763534	LG731346	RSZ2	RSZ3	RSZ4	RSZ6
Model	GZM29	GZM30	GZM31	CPR105	RSZ2	RSZ3	RSZ4	RSZ6
Range	100m	200m	250m	250m	50m	80m	100m	120m
Mount	Tape	Tape	Tape	GLS105 pole	Tape	Tape		
Size	20x20mm	40x40mm	60x60mm	60x60mm	20x20mm	30x30mm	40x40mm	60x60mm

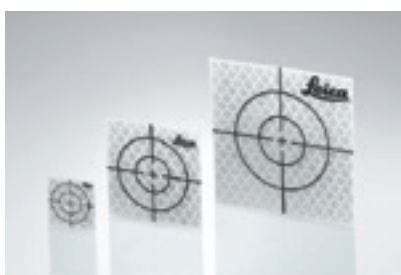

GZM29, GZM30 and GZM31



CPR105

Survey Accessories – CST Prisms



#531507



#531100, 580654



#532010, 532012



#531010



#513512



#526053



#533011, 532011V, 541063



#531012

Item number	Model number	Prism type	Holder	Comments
513512	65-1512	Circular	Canister	Sealed in black anodized aluminium can
531100	63-2011	Circular	Canister	Hermetically sealed precision prism with 5/8" thread
580654	63-4011	Circular	Canister	Precision prism with LED in centre. M20 thread
533024	63-3024	Circular	Canister	Snap-In Leica style prism
531010	63-1010	Circular	Prism assembly	Optima target back, metal assembly, with 5/8" thread
532012	63-2012	Circular	Prism assembly	Hermetically sealed. Plastic yoke
532012M	63-2012M	Circular	Prism assembly	Hermetically sealed with polycarbonate metal yoke and assembly
526053	65-1505	Mini	Prism assembly	Plastic assembly with levelling bubble and 5/8" thread base
533011	63-3011	Circular	Canister	Copper coated monitoring prism. Ideal for humid conditions
532011V	63-2011V	Circular	Canister	Hermetically sealed, Monitoring seconds prism
541063	1100-C	Circular	Canister	Copper coated monitoring prism. Ideal for humid conditions
531012	63-1012	-	-	Optima prism holder and back target

Survey Accessories – Adapters



#522010



#522070



#A06-4011

Tribach Adapters

Item number	522010	522070	A06-4011
Model	61-2520	61-2525	61-2521
Comments	Fixed tribach adapter	Rotating adapter	Rotating friction adapter



5/8" Thread to
Spigot #523513



"Spigot to 5/8"
Thread #7050199



Brass 5/8" to Spigot
#7050200

Thread Adapters

Item number	Description
532513	5/8" thread to leica male spigot
7050195	BRASS 5/8" thread to leica male spigot (short)
7050200	BRASS 5/8" thread to leica male spigot long
526057	Leica spigot to mushroom
7050199	BRASS Leica spigot to 5/8" thread

Survey Accessories – Plumb Bobs



Plumb Bobs

Item number	A10-5012	A10-5016	A10-5024
Model	11-550	11552	11554
Description	Plum Bob 340g	Plum Bob 455g	Plum Bob 680g


Plumb Bob Accessories

Item number	580035	580030	531507	7090463
Model	11555A	11555B	651507	
Description	Plum Bob cap	Plum Bob Point	Point & Plum Bob hook	Plumbob pouch

Gammon Reel

Item number	526002	526001
Model	11729	11730
Description	3.6m	2.1m

Survey Accessories – Polytech Pegs

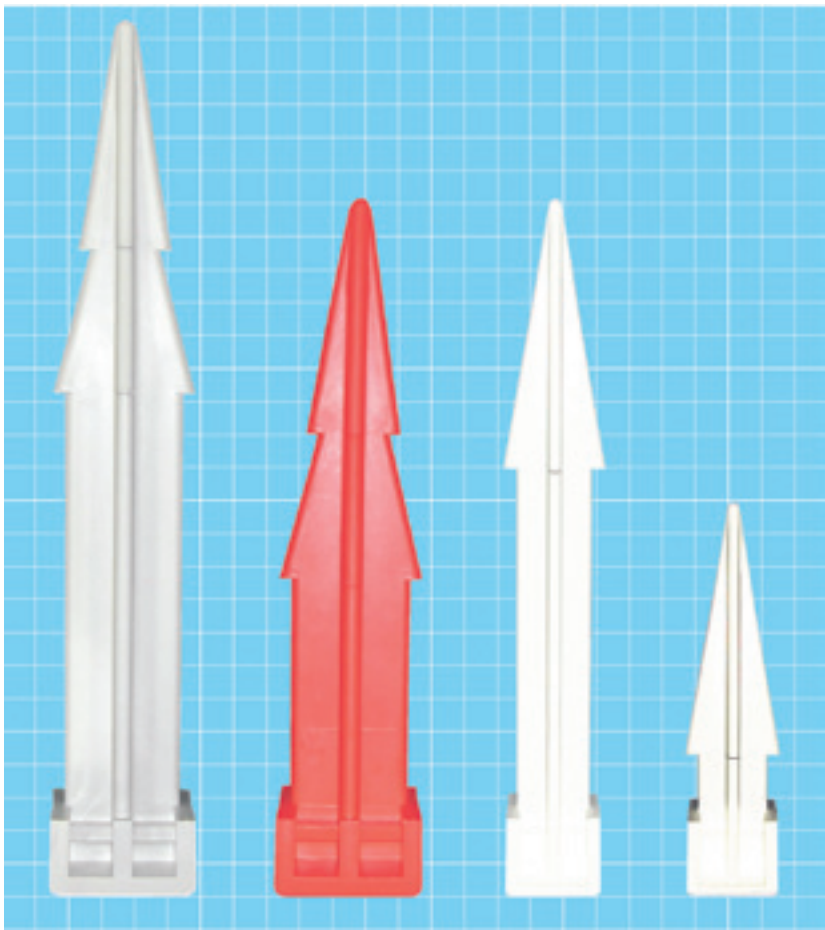

Polytech Pegs

Made from polypropylene, a non toxic and chemically inert plastic, these pegs are half the weight of a traditional wooden peg.

Manufactured and designed by Survey Pegs Australia, Polytech Pegs are the survey pegs of the future.

Features include; centring point to take a nail or metal tag to, lot numbers can be stamped on individual pegs, UV resistant, heat resistant, non-flammable, impervious to white ants, designed to be easily driven into various soil types, engineered to suit state specifications, recyclable and available in a range of colours.

FROM LEFT TO RIGHT OF THE IMAGE CADASTRAL:

75x75x450mm
STATE: NSW, QLD, WA, TAS.

CADASTRAL: 75x75x350mm
Red: WA
White: QLD

CADASTRAL: 50x50x350mm
VIC, QLD, SA, WA, NT, TAS
75x50x350mm, NSW

ENGINEERING: 50x50x210mm
Set out peg. Green, yellow
and orange.

Accessories

Item number	7090366	7090388	7090377
Description	Peg Stamp for Wood	8mm Peg Stamp for Polypegs	Peg Stamp Leather Case

Survey Accessories – Spray Paint



Dy-Mark Spray & Mark is Australia's best selling marking paint. All cans have an inverted nozzle, weigh 340g and are suitable for a range of applications such as surveying, construction, landscaping, civil works, etc. Cans are available as individual items or in packs of 12.

Item Number	Description
7090332B	Survey spray black
7090332DB	Survey spray dark blue
7090332FG	Survey spray fluro green
7090332FO	Survey spray fluro orange
7090332FP	Survey spray fluro pink
7090332FR	Survey spray fluro red
7090332G	Survey spray green
7090332GR	Survey spray grey
7090332O	Survey spray orange
7090332R	Survey spray red
7090332W	Survey spray white
7090332Y	Survey spray yellow
7090338	Spray paint holster (plastic)
7090337	Spray paint arm with wheel
7090370	Spray paint long arm
7090339	Spray marking chalk yellow
7090440	Spray marking chalk white



Spray paint long arm
#7090370



Spray paint arm with wheel
#7090337

Survey Accessories – General Flagging Tape

Item Number	Description
7090481DB	Dark Blue
7090481DG	Dark Green
7090481FL	Fluro Lime
7090481FO	Fluro Orange
7090481FP	Fluro Pink
7090481LG	Light Green
7090481O	Orange
7090481R	Red
7090481SB	Sky Blue
7090481W	White
7090481Y	Yellow
7090480	Red/White
7090482	Fluro Orange


These vinyl flagging tapes are ideal for surveyors, and available in a wide range of colours. All rolls are 25mm x 100m.




Survey Accessories – Staves



LR39 and LR34



SMP222



GTL4C



GMP111



GMP112



GRZ4

Leica

Item Number	Model	Digital level	Description
LG764452	GSS113	Sprinter	3m/1 section fiberglass, barcode & E face
LG522794	GKNL4M	DNA	4m/3 section fiberglass, barcode & E face
LG757761	GTL4M	DNA	4m/4 section fiberglass, barcode & mm
LG667113	GTL4C	DNA	4m/4 section aluminium, barcode & mm
LG746613	GSS112	Sprinter	4m/4 section aluminium, barcode & E face
LG741882	GSS111	Sprinter	5m/4 section aluminium, barcode & E face
LG563733	GWCL60	DNA	0.6m/1 section barcode & Invar scale face
LG563659	GPCL2	DNA	2m/1 section Invar bar & barcode face
LG560271	GPCL3	DNA	3m/1 section Invar bar & barcode face



E Face Staff



Metric Staff

Myzox

Item Number	Model	Description
091597	SUM33EB	3m/3 section E face - 118cm with cover
011053	SUM33MB	3m/3 section Metric - 118cm with cover
091551	ALG-55EB	5m/5 section E face - 127cm with cover
011001	ALG-55MB	5m/5 section Metric - 127cm with cover
011201	ALS-74	7m/4 section Metric - 182cm with cover
011101	GFS-55	5m/5 section Metric - Fibreglass

Astor

Item Number	Model	Description
519104WC	3M/3E	3m/3 section E face - 118cm with cover
519102WC	3M/3M	3m/3 section Metric - 118cm with cover
519121WC	5M/5E	5m/5 section E face - 127cm with cover
519118WC	5M/5M	5m/5 section Metric - 127cm with cover
519175WC	7m/5E	7m/5 section E face - 182 cm with cover

Accessories – Staff Bubble

Item Number	Description
519097	LR39 Staff Bubble Plastic
519098	LR34 Staff Bubble Metal
519092	LR7 Staff Bubble detachable for Astor
519618	Clip on Bubble for GTL4 Staves
111114	SA60 bubble for Myzox 5m & 7m staves
111115	SB60 bubble for Myzox 3m staves
211090	Staff 5/8" thread prism adapter

CST Cut and Fill Rods

Item Number	Model	Description
519012	o6-TLM	Cut & fill rod, 2.4m, 2 section.

Survey Accessories – Bi-Pods

Leica and CST bi-pods are ideal for holding prism poles in the field.



GSR2 #LG555720
for 25mm diameter poles
(Leica GLS11/GLS11K).



GSR111 #LG667319
suitable for poles of all diameters.



GST6
Quickstand
#LG560138
With 3 telescopic legs,
for 25mm poles.

Survey Accessories – Tripods



RA Flat Head #A11-1210



RA Dome Head #A11-1220



CTP101 #LG726831



GST05 #LG399244



GST05L #LG563630



CTP106 #LG789913



GST20-9 #LG394752



GST120-9 #LG667301



Trimax #LG670238



Elevating Tripod #MYX217425



Elevating Tripod #519036

Survey Accessories – Tripods



GST20 #LG296632



Tripod for staves #A08-2100



HDS Tripod for Poles or Targets
#LG670223

Model	Item #	Manufacturer	Material	Leg clamp	top	Weight	Max height	Collapsed height	Total Station/Scanner	GPS	Laser/Levels/Targets	Poles/staves
RA FLAT	A11-1210	RA	Aluminium	Dual	flat	5 kg	1.73m	1.3m	no	no	yes	no
RA DOME	A11-1020	RA	Aluminium	Dual	dome	5 kg	1.73m	1.3m	no	no	yes	no
ELV-3000	MYX217425	Myzox	Aluminium	screw	flat	6.2kg	3m	1.26m	no	no	yes	no
ELV-COVER	519036	RA	Aluminium	screw	Flat	5kg	1.73m	1.03m	no	no	yes	no
CTP101	LG726831	Leica	Wood	screw	flat	5kg	1.73m	1.3m	yes	yes	yes	no
CTP103	LG332200	Leica	Aluminium	screw	flat	5kg	1.73m	1.3m	no	yes	yes	no
GST05	LG399244	Leica	Wood	screw	flat	5.6kg	1.76m	1.07m	no	yes	yes	no
GST05L	LG563630	Leica	Aluminium	screw	flat	5.6kg	1.76m	1.07m	no	no	yes	no
CTP106	LG789913	Leica	Aluminium	screw	flat	3.45kg	1.65m	1.0m	no	no	yes	no
GST20-9	LG394752	Leica	Wood	screw	flat	6.4kg	1.8m	1.07m	yes	yes	yes	no
GST120-9	LG667301	Leica	Wood	screw	flat	6.4kg	1.8m	1.07m	yes	yes	yes	no
GST20	LG296632	Leica	Wood	screw	flat	6.4kg	1.8m	1.07m	no	yes	yes	no
TriMax	LG670238	Leica	Wood/fibreglass	Dual	flat	10kg	1.83m	1.07m	yes	yes	yes	no
68-3950	A08-2100	CST	Aluminium	screw	Gator for staves 1-1/4" diameter	1.5kg	1.07m	1.07m	no	no	no	yes 1-1/4"
HDS Tripod	LG670223	Leica	Aluminium	thumb release	For poles (22-38mm)	1.3kg	1.8m	1.2m	No	No	No	Yes
Inverted	NESTLE INVTPOD	Nestle	Aluminium	screw	5/8" Thread	10kg	-3m	1.3m	yes	no	no	no



GHT58 Tripod Bracket
#LG734163



GHT43 Tripod Bracket
#LG748417



GST4 Tripod Star
#LG332200, #519011

Accessories

Model	Description	Item Number
GST4	Tripod Star	LG332200
GHT43	Tripod Bracket	LG748417
GHT58	Tripod Bracket	LG734163
HPRC 6500W	Tripod Case	P6500EWB
A11-801	Tripod Star	519011
Tripod Dolly	Tripod wheel base	SEC90555



HPRC 6500W Tripod Case
#P6500EWB

Survey Accessories – Wall Stations



Wall Station Mount with Leica Male Spigot

#602009



MTL1-LR slim line mining laser

#7090127SL

Wall stations are used for underground survey control to create a survey network. They are typically used in conjunction with Leica prisms and Leica total stations or a MTL1-LR underground mining laser.

Item number	Description
7090127	MTL1-LR Mining Laser
7090127SL	MTL1-LR slim line mining laser
602008	Wall mount for MRL1-LR laser
602009	Wall Station Mount with Leica Male Spigot
602011	Wall Station Sleeves Aluminium - 1m length
602017	Wall Station Sleeves Stainless steel - 80mm
602010	Steel pillar plate
602020	Monitoring P Plate
LG362820	GPH1 Single Prism Holder
LG362830	GPR1 Prism in container
11R5-W-VA	3/8" thread with stainless steel Leica spigot (short)
11R5-W	3/8" thread with brass Leica spigot (short)
11R2-40W	Wall plug with 3/8" thread Dynabolt.



#11R2-40W



#11R5-W-VA



#7050195



#7050200

Lenspen Cleaning Pens



Keep your optical lenses clear and clean with the Lenspen.

Lenspen #NLP-1

A superb new tool in optical lens cleaning technology. Perfect for cleaning total station lenses, dumpy levels lenses, camera lenses, binocular lenses, small aperture spotting scopes and telescopes, eyepieces and other optical items. Comes with a handy retractable dust removal brush and a special non-liquid cleaning element, designed to never dry out. Safe and very easy to use.

No alcohol or cleaning fluids are required.



C.R. Kennedy National Hire Fleet

We carry a comprehensive range of hire equipment to cover nearly all survey and measurements applications

These include:

- Total stations
- Theodolites
- GPS/GNSS
- Machine control
- Scanning lasers
- Optical and laser levels
- Pipe lasers
- Cable locators
- Accessories such as staves, tripods, prisms, etc.

What does this mean to you?

- The fleet consists of the world's most advanced equipment, kept in excellent condition
- We supply basic training for rapid productivity
- Allows you to evaluate on the job without purchase commitment
- Gives you the equipment you need for the one-off job
- Allows you to take on jobs you otherwise couldn't handle



Repairs and Service

Service Centres

We have service centres at all of our offices. With technicians who have been factory trained, workshops that are accredited by Leica Geosystems, and use of only genuine components, CR Kennedy can offer you the best service for your instrument. We offer replacement instruments from our hire fleet during a servicing to minimise down time.

We service and repair all the equipment we sell, including:

- Total stations
- Theodolites
- GPS/GNSS equipment
- Laser levels
- Optical levels
- Tribrachs
- Tripods

And much more!



Technical Support & Training



Over many years, C.R.Kennedy has acquired the expertise of the leaders in the surveying field. We have built a surveyor based service business with a full range of the best products in the world, combined with the best support people in the country.

Technical Support

At C.R.Kennedy, we understand the importance of supporting our extensive range of surveying products. With a highly committed and responsive technical support and training team who can answer your questions, whether simple or complex, and provide the required product training.

To this extent, we have recently invested in our support structure to expand our team, so that we can continue to provide the level of service that our clients demand. This new support and training structure comprises of state based personnel that will assist with your day to day support and training needs, and backed-up by a national team of product experts.

Training

In addition to technical support, we also understand that high quality training is critical and the key to unlocking the true potential of your survey equipment.

Our structured training programs will enable you to take full advantage of your instruments capabilities, and improve your work flow, both in the field and in the office, with the goal of increasing your productivity and giving your company a competitive advantage.

C.R.Kennedy offers a flexible selection of training packages to suit your company's needs, experience and time frame.

CPD Accreditation

These courses are designed to advance the knowledge of our clients in the most efficient and productive use of their surveying equipment and software, and will contribute to their continued professional development.

In this regard, we have received CPD accreditations for these courses by a number of state Surveying Authorities. Please contact us for details and applicable CPD points.

VIC / TAS: (03) 9823 1884
NSW / ACT: (02) 9552 8384
QLD: (07) 3632 6784
WA / NT: (08) 9489 8584
SA : (08) 8410 1366

surveysupport@crkennedy.com.au
surveytraining@crkennedy.com.au

Training Courses



Total Stations (TPS)

Getting Started (1 day)

Workflow training for any Leica Total Station, including data exchange with popular CAD packages.

Learn the standard functions of your TPS instrument and be able to perform common survey tasks, including detail and set-out surveys.

Advanced TPS (1 day)

Understand how to customise your instrument, perform advanced field coding, create / edit data export formats and the more advanced on-board applications. Import data into Leica Geo Office (LGO), edit and export to required format and generate jobs using design to field.

GPS/GNSS

Getting Started (1 day)

Learn the basic concepts of GPS/GNSS positioning and the functionality of your Leica equipment, workflow training in RTK including detail surveys, coding and export of data, and perform site transformation to gain an understanding of coordinate systems.

Advanced (1 day)

Explore the advanced settings of the Leica GPS/GNSS. Learn complete equipment configuration, static data capture and basic processing, field coordinate transformation, the more advanced applications and how to create field data reports.

Leica Geo Office

Getting Started (1 day)

Workflow training in Leica Geo Office incorporating TPS/GPS data import, editing, simple processing, and basic analysis. This course provides a detailed explanation behind the settings and functionality enabling the user to get the most from the LGO software.

Advanced (1 day)

Develop your understanding of static post-processing, data analysis, reporting and network adjustment. Learn new troubleshooting skills. Then further explore LGO looking at precise ephemeris, internet download and image referencing.

Additional Courses

Introduction to RoadRunner (1 day)

This course is designed for new users of the RoadRunner application. You will be taken through the practical procedures necessary for performing road setout within RoadRunner. The course will include an explanation of stringlines, RoadRunner elements and task development.

Introduction to Laser Scanning (1 day)

Overview of 3D Laser Scanning technology and how this could benefit your business. Includes the basic principles of data capture, target registration and 3D point-cloud processing using specialised software. Plus reviewing case studies and projects.

Customised Company Training

All published courses may be customised to your company's requirements, allowing you to get the most from your training investment. Choose between training on-site or at one for our state based training facilities. Or let us know what training you need and we'll do our best to accommodate.

Product Workshops

Throughout the year we will hold a series of half day product workshops aimed at existing users. These workshops are designed to keep users up to date with new applications, software updates, new products, improved workflows and general advancements in survey technology.

C.R. Kennedy Training Centre

Located behind our head office in Port Melbourne, Victoria, the C.R. Kennedy Training Centre has live earthmoving machinery on site in a civil construction environment so that visitors can experience and use the Leica Geosystems machine control applications on a real machine.

There is also a full simulation training room for any client who has not yet experienced the ease of using a Machine Control application. The centre provides the perfect opportunity to get a hands-on preview of what operating a system is like.

C.R. Kennedy is dedicated to providing the best instruments and systems to the surveying and construction community. The investment in this centre to support our clients reflects that commitment.

It is important to us that you know what you are investing in and how

it will work. To that end the C.R. Kennedy Training Centre offers comprehensive, practical training with experienced technical staff on hand to answer all questions.

Groups or individual training can be catered for and *certificates of completion* are awarded to all participants.

For further information contact your local CRKennedy office or surveytraining@crkennedy.com.au.

300 Lorimer Street,
Port Melbourne, 3207

Phone: 03 9823 1533



PowerDigger 2D Screen



PowerDigger 2D & 3D Screens



Maintenance agreements

Extension of warranty / Maintenance agreements

Give yourself and your instrument special attention. Service agreements reduce your instrument running costs, promote instrument longevity and ensure the best reliable performance.

Typical contracts may include:

- Extension of warranty including parts and labour for remedial services
- Priority service and repairs
- Annual service including test protocol and calibration certification
- Flexible invoice periods to suit your business
- Fixed costs per annum to allow easy budgeting

Fully Maintained Rentals

Our Fully Maintained Rental program is designed specifically for surveyors to provide the ideal business solution. By combining a rental with a maintenance agreement, we can offer protection from obsolescence with regular upgrades to the latest technology, and ensure your survey instruments are productive at all times. By reducing your capital expenses on equipment, you can preserve your capital and better budget for new business opportunities.

Advantages of a fully maintained rental are:

- One fixed monthly cost, so you can better budget your work
- Reduced capital expenditure
- No maintenance costs or repair bills
- The latest software and hardware protecting you from obsolescence
- Loan equipment free of charge during servicing so you're always able to work

Insurance

You wouldn't purchase a car without insurance, so why wouldn't you insure a total station?

C.R.Kennedy can recommend the right insurance options for your instruments.



Finance Options

Don't put off work because of limitations with your current equipment. With various finance companies, C.R.Kennedy can offer a range of flexible finance options to suit individual circumstances.

You can reduce your capital expenses, easily budget with fixed monthly costs, gain access to the latest equipment, and meet the requirements of the work you have today.

Finance options can also be combined with maintenance agreements, so you'll never have any surprise repair costs.

[illegible]

Notes

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



VICTORIA

300 Lorimer Street, Port Melbourne, 3207

Tel (03) 9823 1533

Fax (03) 9823 1593

Email vicsurvey@crkennedy.com.au

NEW SOUTH WALES

3 / 280 Coward Street, Mascot, 2020

Tel (02) 9552 8370

Fax (02) 9552 8379

Email nswsurvey@crkennedy.com.au

QUEENSLAND

80 Kingsford Smith Drive, Albion, 4010

Tel (07) 3862 6210

Fax (07) 3862 6212

Email qldsurvey@crkennedy.com.au

CENTRAL QUEENSLAND

PO Box 4032, Mackay South, 4740

Tel (07) 4957 6733

Fax (07) 4957 6755

Email itruscott@crkennedy.com.au

FAR NORTH QUEENSLAND

Unit 1, 131 Scott Street, Cairns, 4870

Tel (07) 4031 5399

Fax (07) 4031 5404

Email fnqsurvey@crkennedy.com.au

SOUTH AUSTRALIA

261 Sturt Street, Adelaide, 5000

Tel (08) 8410 1366

Fax (08) 8410 1370

Email sasurvey@crkennedy.com.au

WESTERN AUSTRALIA

17-19 Oxford Close, West Leederville, 6007

Tel (08) 9489 8500

Fax (08) 9489 8501

Email wasurvey@crkennedy.com.au

Training surveytraining@crkennedy.com.au

Support surveysupport@crkennedy.com.au



crkennedy.com.au



@CRKennedySurvey

