

GENNIUS BELT DRIVEN PATIO SYSTEM

GLOBAL AWNING ACCESSORIES





BAT
awning the italian way


WWW.GLOBALAWNINGS.COM.AU

FEATURES


- The Gennius Belt Drive Pleated Patio System is versatile and simple in design.
- Uses a 70mm KeywayTube.
- Maximum width is 13.5 metres.
- Projections over 7m are available (P.O.A). If projection is greater than 7 metres it must be Top Supported.
- Recommended Measure of Fall is between 10 to 13 degrees
- Maximum Span between Posts is 4500mm centre to centre.
- Guttering for Drainage of water is an optional extra.
- Side Infills are an available option.
- A Hood Beam is another option available.
- Remote Control motor is the drive source – Gear-Box drive is not available.
- Utilises Individual Pleats – the nominal width of each pleat is 750mm.
- Extra Pleats are available at an additional charge.
- Uses a 6mm Spline along each long edge of the cross bars.
- Gennius can be Wall/Face Fixed or Ceiling/Top Fixed.

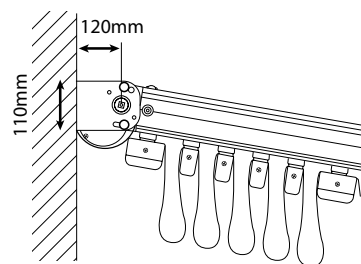

Wall Fixing



Ceiling Fixing

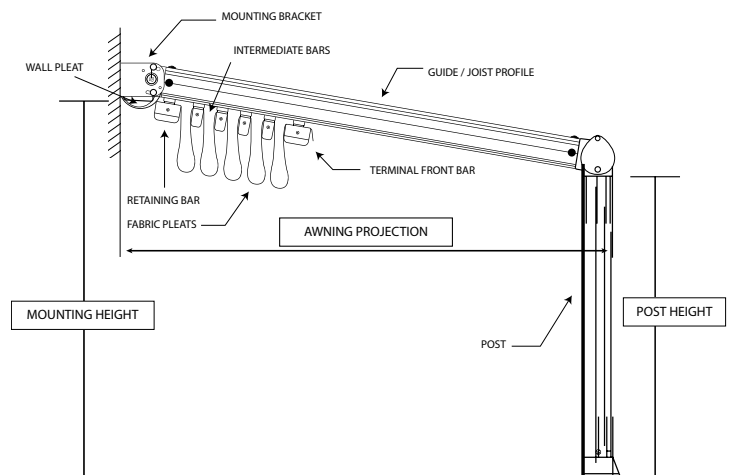

Gennius A1 Awning Side View

