

# **MOB TAG**

---

## **Owner's Manual**

© 2025 Garmin Ltd. or its subsidiaries

All rights reserved. Under the copyright laws, this manual may not be copied, in whole or in part, without the written consent of Garmin. Garmin reserves the right to change or improve its products and to make changes in the content of this manual without obligation to notify any person or organization of such changes or improvements. Go to [www.garmin.com](http://www.garmin.com) for current updates and supplemental information concerning the use of this product.

## Table of Contents

|                                                                    |   |
|--------------------------------------------------------------------|---|
| Pairing an MOB Tag with the Force®<br>Current Trolling Motor ..... | 1 |
| Replacing the MOB Tag Battery .....                                | 2 |



## Pairing an MOB Tag with the Force® Current Trolling Motor

- 1 Make sure the trolling motor is turned on.
- 2 Hold the power button on the side of the MOB tag to turn it on.  
The  icon on the MOB tag flashes red.
- 3 On the trolling motor, press  three times.  
The  LED indicator flashes blue as the motor searches for a connection.
- 4 Make sure the MOB tag is within 1 m (3 ft.) of the trolling motor.
- 5 Press the power button on the MOB tag three times quickly.  
The  icon on the MOB tag flashes blue as it searches for a connection.

When the connection is successful, the  status LED on the trolling motor turns solid green.

For instructions on using the MOB tag with the Force Current trolling motor, go to [garmin.com/manuals/force\\_current\\_trolling\\_motor](https://garmin.com/manuals/force_current_trolling_motor).

# Replacing the MOB Tag Battery


## ⚠ WARNING

See the *Important Safety and Product Information* guide in the product box for product warnings and other important information.

- 1 Using a #1 Phillips screwdriver, loosen the four captive screws to remove the back cover.



- 2 Gently lift the white tab to release the battery from the back cover.
- 3 Place the new battery in the back cover, with the positive (+) side down.
- 4 Make sure the rubber gasket in the front cover of the MOB tag is not broken and is fully seated in its groove. The gasket fits in the groove in a specific orientation.

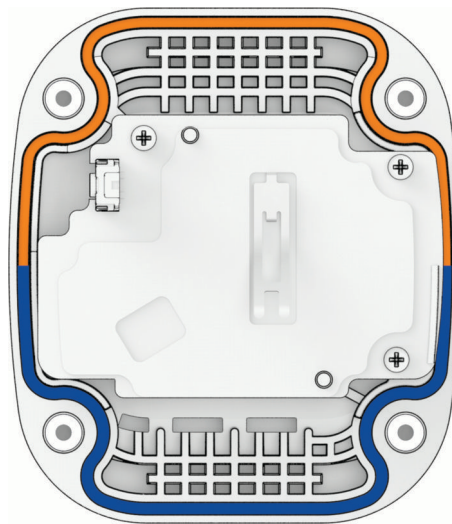

## NOTICE

If the gasket is not properly and fully seated in the groove, it does not create a seal, which leads to the failure of the MOB tag when it is exposed to water. See the *Field Service Manual* at [garmin.com/manuals/force\\_current\\_trolling\\_motor](https://garmin.com/manuals/force_current_trolling_motor) for information on purchasing a replacement gasket.

After you replace the battery, you may need to pair the MOB tag again.



