



① Standard Configuration



② Charging instructions



USB length: 100cm

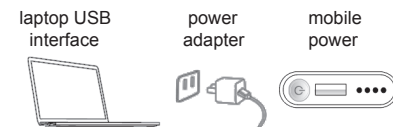


③ Parameter

Bead quantity: 20pcs 3000K warm white, 20pcs 6500K cold white
 CCT: stepless dimming(switch among 3000K-4000K-6000K)
 Power: 2.5W
 Warranty: 2 years
 luminous flux: 200LM
 Battery Type: 3.7V 2000mAh Lithium Battery
 Charging Time: 2 hours get 90% power, 3 hours get 100%
 Run Time: 4-10(high-light level-50% level)
 Charge indicator: under charging turn to red color, finished charging turn to green color
 Interface spec: DC3.5V
 Waterproof grade: IP20
 Material: Iron+ABS plug

Notices:
 1. Do not take apart and change interior parts by yourself
 2. Do not look straight under strong light state in case of eye damage
 3. Do not put lamp under high temperature and moist environment
 4. Do not spray any liquid to lamp and put it together with flammable material
 5. Do not charge for too long, cut off power when you leave.


④ Operating Guide

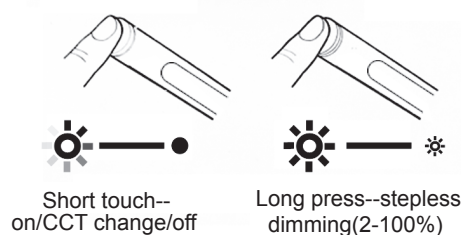

Short touch--on/CCT change/off
 Long press--stepless dimming(2-100%)

Switch Position: one end with switch sign on the plastic plug

Short touch:
 First touch: 40pcs beads light up with 4000K (natural white)
 Second touch: 20pcs beads light up with 6500K(cold white)
 Third touch: 20pcs beads light up with 3000K (warm white)
 Fourth touch: goes into SOS flashing mode
 Fifth touch: back to ready mode until next touch for the next cycle
 Long press: under lighted state, take a long press will achieve stepless dimming. If you take a short touch, the brightness still keep the same level of last one

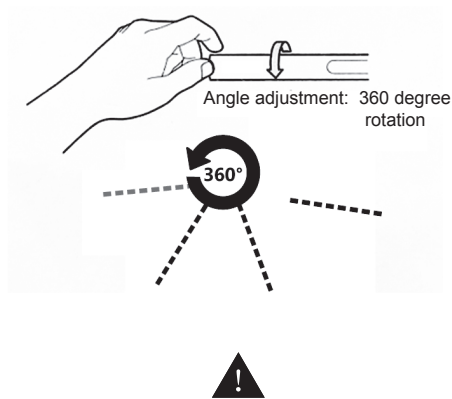

Notices:
 1. For wall mounted, try to put baseholder in the middle of the lamp
 2. For ceiling mounted, try to put baseholder close to battery part as it's heavier than the other side so as to keep gravity balance
 3. Avoid violent shaking in case of falling caused by gravity imbalance

⑤ Installation

A. Magnet

Please ensure adsorbed iron material have enough density, otherwise, the lamp might fall caused by short weight; If the adsorption surface is curved, the lamp might fall as the incomplete adsorb surface result in weakness suction.

B. 3M double-side tape

Adjustable light direction
 Please ensure pasted surface keep smooth, dry, free of oil and dirt in case of falling. Stick one side to baseholder and press hard for 2minutes, tear off the other side and paste it where you want and give another 2 minutes hard press.

C. Screw

Pay attention to screw in place.
 Please prepare your own cross screwdriver and tighten it up in the right position.

⑥ safety tips

1. Do not charge with output voltage > 5V, otherwise, the main control IC might be destroyed, which will lead to circuit board protection functions fails and damage battery.
2. Do not charge with current > 2A.
3. If charge with light on state, ensure keep bightness level ≤90% to avoid full load operation effect product function, and try not charge > 2 hours with light on state.
4. Do not charge for long time, please cut off power if charged.
5. Any interior parts are not allowed to be taken apart, fixed and replaced; do not put lamp under high temperature and moist environment and put it together with flammable material



Portable Multipurpose Cabinet Camping Light

User Manual