





PRODUCT NEWS

K-LED Rebelution

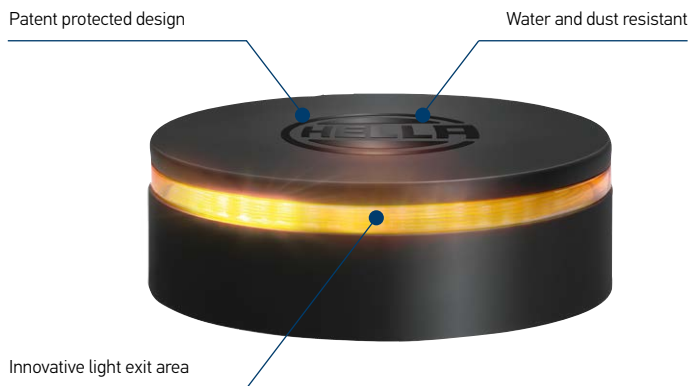

PRODUCT FEATURES


- Warning beacon with state-of-the-art LED technology and futuristic looks
- Permanently visible warning signal
- The rotating light creates a 360° warning effect without dazzle
- Complies with the European directive ECE-R65
- IP 6K9K and IP 6K7 rated for protection against water and dust
- Polarity reversal protection – fully protects electronics, even if connecting leads are swapped round
- EMC protection: CISPR 25 Class 3, ECE-R10
- Weight 690g incl. rubber base
- Multi-voltage: suitable for 12V DC and 24V DC electrical supplies
- Power consumption and input current:
 - max. 13 W and 1.08 A (12V DC)
 - max. 13 W and 0.54 A (24V DC)

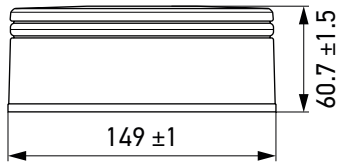


Upright mounting

- Innovative design with rotating lighting function
- The colour and logo of the K-LED Rebelution can be individually customised on request*
- Ingress protection rating: IP 6K7, IP 6K9K
- Complies with EMC requirements for CISPR 25 Class 3, ECE-R10

Description	Part number	Qty
K-LED Rebelution rotating, amber	2RL 455 256-001	1

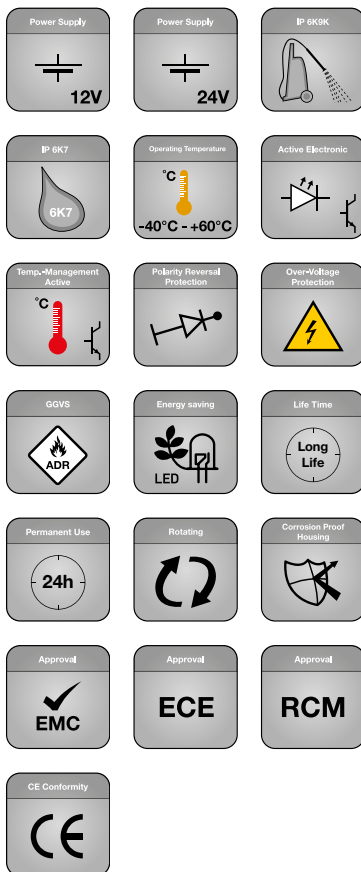

Technical data

Nominal voltage (U _N)	Multi-voltage
Operating voltage (U _B)	12V / 24V DC
Total current consumption	1.08 A (12V DC) 0.54 A (24V DC)
Power consumption	max. 13 W
Light ring	Polycarbonate
Housing	Aluminium
Position of use	Upright
Connection	Cable length: 150 mm, cable ends open
Lighting function	Rotating
Light source	LED
Weight	690 g incl. rubber base
Temperature range	-40°C to +60°C
Reverse polarity protection	Yes
GGVSE / ADR	Yes
Protection class	IP 6K7, IP 6K9K
EMC protection	CISPR 25 Class 3 ECE-R10 
Technical light homologation	ECE-R65 TA1 (E1)

* Contact customer service for further information