

# FIGHTER 1627.

4X2 / 6-SP AUTO / AIR SUSP.

GVM

**16,000KG**

GCM

**25,000KG**

Power/Torque

**199KW/784NM**

Medium rigid licence required.



CLASS LEADING 30,000KM SERVICE INTERVALS.

[fuso.com.au](http://fuso.com.au)

**FUSO**

SPECIFICATIONS

MODEL

- A 4x2 1627 XLWB 6 Sp. AUTO (FM67FM2RFAM)
- B 4x2 1627 XXLWB 6 Sp. AUTO (FM67FS2RFAM)

WHEEL BASE

5500mm  
6500mm


GVM (optional)

16,000kg  
16,000kg

GCM (optional)

25,000kg  
25,000kg

ENGINE	
Engine Version	FUSO 6M60-9AT2 Diesel
Configuration	6 Cyl. In-line OHC, 4-Valve
Type	Variable Geometry Turbo Charged Air to Air Intercooler
Displacement	7.5 litre (7545cc)
Bore	118mm
Stroke	115mm
Power (ECE R85-00)	199kW @ 2500 rpm
Torque (ECE R85-00)	784Nm @ 1100~2400 rpm
Maximum Engine Speed	2900 rpm
Compression Ratio	16.0:1
Cooling System / Oil Cooler	Water cooled, 23.0L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Selective Catalytic Reduction (SCR) after-treatment system (BlueTec), Positive Crankcase Ventilation (PCV)
Emission Level	ADR 80/03 - Euro 5

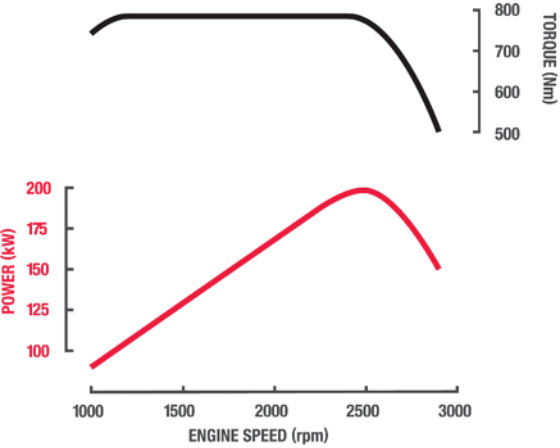

FUEL	
Injection System	DENSO Common Rail System Electronically Controlled Direct Injection
Tank Type	Rectangular Alloy Tank with Locking Cap
Fuel Capacity *	300 Litres
AdBlue Exhaust Fluid Capacity	40 Litres
Speed Limiter	Speed Limited 100km/h
Notes	*Max Fill to approx 95% of Air Capacity

COOLING	
Fan Drive	Thermo modulated continuous control (Viscous)
Radiator	Corrugated Fin with Expansion Tank

ELECTRICAL	
Voltage	24V Negative Earth
Alternator Capacity	24V-80 amp
Starter Capacity	24V-5.0kW
Battery Capacity	2x12V, 65Ah/5hr
Headlamp Type	Halogen
Headlamp Capacity	Low Beam 2x70W High Beam 2x75W

TRANSMISSION	
Version	Allison Automatic MD3500 (Fuso Code M100A6)
Type/Speeds	6 Speed
Features	Generation 5 Control Systems
Ratios	1st: 4.593 2nd: 2.257 3rd: 1.535 4th: 1.000 5th 0.749 6th 0.651 Rev. 4.999
Torque Converter/Stall Torque Ratio	TC415/2.35
PTO Opening	4 o'clock & 8 o'clock
Automatic Transmission Fluid Cooling	2 Chassis Mounted Coolers (LH & RH Side)

PROPELLER SHAFT	
Type	P10
Universal Joint	Needle Roller

FRONT AXLE	
Axle Version	FUSO F650T
Type	Reverse Elliot 'I' Beam
Capacity *	6300kg
Notes	*See MAX LOADING for vehicle capacity.

FRONT SUSPENSION	
Type	Parabolic Leaf with Double Acting Shock Absorbers
Size	1400x80mm Leaves

REAR AXLE	
Type	Full Floating Hypoid
Axle Version	FUSO R060T/D8H
Capacity*	10200kg
Ratio	A 6.660:1      B 6.166:1
Notes	*See MAX LOADING for vehicle capacity.

REAR SUSPENSION	
Type	Air Suspension
Details	Trailing Arm with Air Dump Control and Double Acting Shock Absorbers
Air Spring	2x250mm dia.
Trailing Arm	(643+390)x80x35mm-2 Leaves
Road Friendly Certification Number	RF2043
Capacity at Ground *	10000kg total

MAX LOADING	
Front	6000kg
Rear	10000kg
Total	16000kg

STEERING	
Type	Integral Power Assisted Ball and Nut
Steering Column	Tilt/Telescopic Adjustable with Lock
Ratio	22.4:1

# SPECIFICATIONS

## MODEL

- A4x2 1627 XLWB 6 Sp. AUTO (FM67FM2RFAM)
- B4x2 1627 XXLWB 6 Sp. AUTO (FM67FS2RFAM)

## WHEEL BASE

5500mm

6500mm

## GVM (optional)

16,000kg

16,000kg

## GCM (optional)

25,000kg

25,000kg

### BRAKES

Type	Full Air, Dual Circuit, FUSO Taper Roller, Automatic Brake adjustment, ABS	
Size Front	410x150mm	
Size Rear	410x200mm	
Park Brake	Rear Wheel Spring Actuated	
Auxiliary	Exhaust Brake	
Compressor	Water Cooled, 340cc Single Cyl.	
Air Dryer Model	MD4	

### WHEELS & TYRES

Wheel Type	7, Single Piece Disc	
Wheel Size	22.5x8.25DC-165-13t	
Wheel Stud Pattern	10x335mm PCD	
Tyre Size All	A11R22.5 148/145L	B275/70R22.5 148/145L
Spare Tyre Carrier	Provided	

### CHASSIS

Type	Parallel Channel
Size	280x90x8.0mm
Width	841mm
Tensile Strength	540Mpa

### INSTRUMENTS

Gauges	Speedometer with Odometer Tachometer Air Pressure (2) Fuel Level Water Temperature
Colour Information Display	Fuel Consumption Service Indicators Hour Meter and Tripmeter
Warning Lamps	ABS Turn Signal High Beam Exhaust Brake Oil Level Ad Blue Low Fuel Low Park Brake Alternator Oil Filter Blockage Engine Control / Cruise Control (ECU) Air Filter Restriction Fuel Filter Water Contamination Door Opening
Warning Lamp/Buzzer	Air Pressure Oil Pressure Engine Overheat / Low Coolant Level

### MULTI-MEDIA PACKAGE

Satellite Navigation	Maps with heavy vehicle weight, length, height & hazardous material selectable restrictions with 3 years of Map updates
Colour Display	6.1 inch LCD with touch screen control
Phone Connectivity	Bluetooth® hands free
Audio Visual Entertainment	CD/DVD player and Digital radio DAB+ (also AM/FM for areas not covered by DAB+) USB port for iPod®* & other devices
Reversing Camera Compatible	Display can accept up to 3 cameras#
Notes	* iPod® compatibility requires an additional licensed cable # Cameras available through spare parts

### STANDARD FEATURES

Airbag(s)	Driver's Air Bag and Seat Belt Pre-tensioners
Cab Cooling & Heating	Air Conditioner / Heater / Demister
Accessory Power	24V Accessory Power Outlet / Cigar Lighter
Driving	Keyless Central Locking Electric Windows Cruise Control LH Transom Window Fuso Multimedia Unit Cup Holders (4) Rear Quarter Glass Fluorescent Cabin Lamp and Interior Reading Lamps Engine Idle Speed Control
Storage	Centre Seat Storage Console Rear Bunk Storage Pocket Dash Storage Tray 2 DIN Glove Compartment 1 Single & 1 Double DIN Slot for Accessories Overhead Storage Pocket with Lid RH Door Storage Pocket
Cab: External	Roof Mounting Points (max. static load 70kg) Front End-Outline Marker Lamps
Chassis	Chassis Mounted Tool Box Reverse Warning Buzzer Integrated Front Underrun Protection System (FUPS)

### CAB FEATURES

Type	All Steel Forward Control Manual Tilt 44 deg.
Mounting	Hydroelastic Susp. 4 Point
Colour	Natural White
Interior	Fully Trimmed
Windscreen	Laminated Tinted
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Door	90 degree Opening Angle
Rear Vision Mirrors	Remote / Heated with Convex Spotter (Both sides)
Seating Capacity	3
Seat Belts	2 ELR Lap Sash, 1 Lap
Seat (driver)	ISRI Air Suspension with Height, Tilt and Dampening Adjustment Integral Headrest and Fabric Trim
Seats (passenger)	Centre: Low Back with Fabric Trim Forward Folding Far Passenger: Fixed Base with Reclining Seat Back, Integral Headrest and Fabric Trim

### SERVICE INTERVALS

Interval*	30,000km, 12 Months or 600 Hours (whichever occurs first)
Notes	* based on normal operating conditions and may be reduced when operating under severe conditions.

### WARRANTY

Basic/Powertrain	3 Years, 200,000kms or 4,000 operating hours (whichever occurs first)
Cab Perforation/Anti Corrosion	3 Years

# SPECIFICATIONS

## MODEL

- A** 4x2 1627 XLWB 6 Sp. AUTO (FM67FM2RFAM)  
**B** 4x2 1627 XXLWB 6 Sp. AUTO (FM67FS2RFAM)

## WHEEL BASE

5500mm  
6500mm

## GVM (optional)

16,000kg  
16,000kg

## GCM (optional)

25,000kg  
25,000kg

### PERFORMANCE

Turning Circle (kerb to kerb - metres)	<b>A</b> 18.4	<b>B</b> 21.4
Electronically Speed Limited to:	100km/hr Conforms to ADR65/..	
Engine Speed (rpm) at 100km/hr (top gear)	<b>A</b> 2276	<b>B</b> 2304
Gradeability at Rated GVM (theoretical)*	69%	
Gradeability at Rated GCM (theoretical)*	38%	
Notes	*This is theoretical performance only. Actual performance may vary under different conditions	

### MASS (ESTIMATED)\*

Front*	<b>A</b> 3080kg	<b>B</b> 3135kg
Rear*	1990kg	2050kg
Total*	5070kg	5185kg
Notes	* Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)	


### DIMENSIONS (MM)

Width Front Fender (mm)	<b>A</b> 2450	<b>B</b> 2450
Width Rear Axle (mm)	2470	2470
Width Front Track (mm)	1925	1925
Width Rear Track (mm)	1850	1850
Width Frame (mm)	841	841
A - Length Overall (mm)	9325	10695
C - Front Overhang (mm)	1245	
D - Wheelbase (mm)	5550	6500
G - Front Axle to Rear of Cab (mm)	745	745
H - Rear of Cab to Rearmost Item Behind Cab (mm)	130	130
I - Rearmost Item Behind Cab to Rear Axle (mm)	4675	5625
J - Frame, Rear Axle to End (mm)	2530	2950
P - Height Cab to Ground (mm)	2675	2630
Q - Height Cab to Frame (mm)	1669	1669
R - Height Rear Frame to Ground (mm)	Inflated: 1012 Deflated: 965	Inflated: 969 Deflated: 922

### BODY BUILDER'S NOTES

Notes

Chassis reinforcement must be utilised for Tipper/Demountable type body configurations. To conform with ADR 13/00 (lighting requirements) the following must be adhered to at body installation.  
 - If other than a flat type or tipper body is fitted, rear end out-line marker lamps must be installed.  
 - If overall length exceeds 6.0 metres, side reflectors must be installed.  
 - If overall length exceeds 7.5 metres, side marker lamps must be installed.  
 To conform with ADR 42/04 (General Safety), rear wheel guards must be fitted to the vehicle.

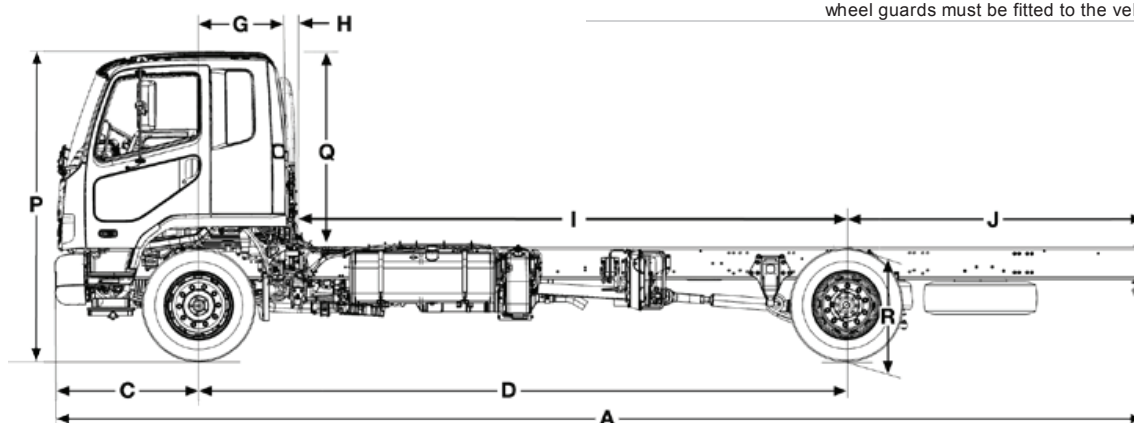

# CALL 1300 429 134

or visit [fuso.com.au](http://fuso.com.au)

# FUSO

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this document are for illustration purposes only and may not be available from Mercedes-Benz Australia/Pacific Pty Ltd (ABN 23 004 411 410) ("MBAuP"). No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than MBAuP. MBAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from MBAuP please contact your authorised Mitsubishi FUSO truck and bus dealer. Fuso is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © MBAuP. Reproduction in whole or part prohibited without written approval. Part Number TSF41F-SSV1. Valid from 01-Aug-16.