

DAILY 45C STRONG BY NATURE



IVECO

Your partner for sustainable transport

DAILY SPECIFICATIONS 45C

DIMENSIONS (mm)

X	Wheelbase	3000	3450	3750	4100	4350	4750
K	Overall length	5378	5943	6553	6953	7373	8238
H	Overall height unladen	2283	2276	2270	2264	2263	2258
	Front track	1754	1724	1724	1724	1724	1724
	Rear track	1542	1542	1542	1542	1542	1542
T	Unladen frame height at end of frame	796	791	792	782	778	778
	Front ground clearance	196	196	196	196	196	196
	Rear ground clearance	177	177	177	177	177	177
Y	Rear overhang	1370	1485	1795	1845	2015	2480
	Turning circle: kerb to kerb	11116	12526	13466	14564	15348	16604
	Turning circle: wall to wall	11730	13146	14090	15190	15976	17234

BODY DIMENSIONS (mm)

Maximum body width	2350	2350	2350	2350	2350	2350
--------------------	------	------	------	------	------	------

MASS (kg)

GVM	4495	4495	4495	4495	4495	4495
GCM	7995	7995	7995	7995	7995	7995
Towing capacity with braked trailer	3500	3500	3500	3500	3500	3500
Front axle capacity	2100	2100	2100	2100	2100	2100
Rear axle capacity	3400	3400	3400	3400	3400	3400
Kerb mass front axle	1381	1406	1412	1432	1439	1450
Kerb mass rear axle	638	643	649	650	657	670
Kerb mass total*	2019	2049	2061	2082	2096	2120
Payload capacity	2476	2446	2434	2413	2399	2375

* Kerb masses are with minimal fuel, spare wheel, tools and no driver.

ENGINE

- IVECO FIC (EURO 5)

Type: 170hp: IVECO FIC (EURO 5) – 4 stroke diesel with direct-injection, Variable Geometry Turbocharger (VGT) and intercooler.

Optional: 205hp: IVECO FIC (EURO 5) – 4 stroke diesel with direct-injection, Twin Stage Turbo (TST) and intercooler.

Maximum Output: 170hp/125kw @ 2900-3500 rpm

Optional: 205hp/150kw @ 3100-3500 rpm

Maximum Torque: 317 lb ft/430Nm @ 1500-2600 rpm

Optional: 347 lb ft/470Nm @ 1400-3000 rpm

Emissions Technology: Exhaust Gas Recirculation system

Total Displacement: FIC: 3.0 litre

Exhaust: Muffler horizontally positioned on the right side and tailpipe located mid-way down right side of vehicle

FRONT AXLE & SUSPENSION

- IVECO 5819

Capacity: 2100 kg

Suspension Type: Independent with adjustable steel torsion bar

Capacity: 2100 kg

REAR AXLE & SUSPENSION

- IVECO 450511 full-floating single reduction

Capacity: 3400 kg

Suspension Type: Multileaf spring

Optional: ECAS - Rear air suspension

Capacity: 3400 kg

Rear axle ratio: 3.91:1 with manual transmission

- 3.60:1 with automatic transmission

Optional: Driver Controlled Differential Lock

BRAKES

Type: ESP 9+ ABS + ASR 9 with EBD (Electronic Brakeforce Distribution) and Hill Holder

Front / Diameter: Ventilated disc brakes / 290 mm (28mm thick)

Rear / Diameter: Disc brakes / 290 mm (22mm thick)

Parking brake: Manual brake operating on rear axle

Service brakes: Dual circuit with vacuum servo


- Pad wear warning light for front and rear brakes

STEERING

- Power steering
- 390mm diameter steering wheel with telescopic adjustment

FUEL SYSTEM

- 100 litres with fuel cap location on passenger side

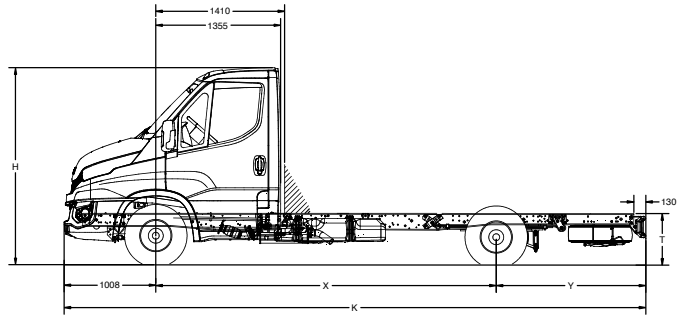

TRANSMISSION

- 6 speed synchromesh overdrive manual transmission

Type: 2840.6 OD

1st 5.375, 2nd 3.154, 3rd 2.041, 4th 1.365, 5th 1.000, 6th 0.791 OD, Rev. 4.838

- 8 Speed ZF Torque Converter Automatic (Hi-Matic)

Type: 2850.6 DOD -- with 205HP

1st 4.655, 2nd 2.48, 3rd 1.44, 4th 1.000, 5th 0.796 OD, 6th 0.685 DOD, Rev. 4.189

Type: 8V470A

1st 4.696, 2nd 3.130, 3rd 2.104, 4th 1.667, 5th 1.285, 6th 1.000, 7th 0.839 OD, 8th 0.667 DOD, Rev. 3.297

CLUTCH

- Single dry plate
- Hydraulically controlled

Diameter: 280 mm

CHASSIS

Type: C Section steel longitudinal side members with tapered ends and tubular cross members

ELECTRICAL SYSTEM

Battery: 12 Volt – 110 Ah

Smart Alternator: 12 Volt – 180 A

- Trailer wiring to rear of chassis

WHEELS & TYRES

Wheels: Steel 5J x R16

Tyres: 195/75 R16

CABIN FEATURES

- Driver, passenger and curtain airbags with seat belt pretensioners
- Fixed driver's seat with headrest
- Dual bench passenger seats with headrests, extractable table and storage underneath
- Cruise control
- Electric windows
- Exterior mirror with integrated wide angle and direction indicators, heated and electronically adjustable
- Overhead console with storage shelf and space for additional equipment
- Large dual storage pockets in doors
- Document storage compartment
- Body builders connectors
- ECO function (170hp)
- Additional in-dash storage
- Automatic climate control

DASHBOARD

- Analogue electronic speedometer
- Electronic tachometer
- Fuel level indicator with reserve light indicator
- Coolant temperature indicator with high temperature indicator light
- Instrument light dimmer switch
- Dash-mounted gear lever
- LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation, clock, speed limit exceeding, external temperature and service indicator
- IVECONNECT multimedia system including MP3 player, USB and AUX connectivity, bluetooth with steering controls

SECURITY

- Central locking with remote control
- Steering lock
- Engine immobiliser

OPTIONS

- Heated, suspended and fully adjustable single driver and passenger seat
- Factory Fitted Tray

IVECO

Your partner for sustainable transport