

DAILY 70C STRONG BY NATURE



IVECO

Your partner for sustainable transport

DAILY SPECIFICATIONS 70C

DIMENSIONS (mm)

X	Wheelbase	3750	4100	4350	4750
K	Overall length	6553	6953	7373	8238
H	Overall height unladen	2350	2344	2340	2335
	Front track	1725	1725	1725	1725
	Rear track	1660	1660	1660	1660
T	Unladen frame height at end of frame	706	696	689	693
	Front ground clearance	171	196	171	171
	Rear ground clearance	165	177	165	165
Y	Rear overhang	1795	1845	2015	2480
	Turning circle: kerb to kerb	13048	14108	14866	16078
	Turning circle: wall to wall	13694	14758	15518	16734

BODY DIMENSIONS (mm)

Maximum body width	2350	2350	2350	2350
--------------------	------	------	------	------

MASS (kg)

GVM	7200	7200	7200	7200
GCM	10700	10700	10700	10700
Towing capacity with braked trailer	3500	3500	3500	3500
Front axle capacity	2500	2500	2500	2500
Rear axle capacity	5350	5350	5350	5350
Kerb mass front axle	1508	1530	1537	1546
Kerb mass rear axle	871	874	881	900
Kerb mass total*	2379	2404	2418	2446
Payload capacity	4821	4796	4782	4754

* Kerb masses are with minimal fuel, spare wheel, tools and no driver.

ENGINE

- IVECO FIC (EURO 5)

Type: 170hp: 4 stroke diesel with direct-injection, Variable Geometry Turbocharger (VGT) and intercooler

Optional: 205hp: IVECO FIC (EURO 5) – 4 stroke diesel with direct-injection, Twin Stage Turbo (TST) and intercooler

Maximum Output: 170hp/125kw @ 2900-3500 rpm,

Optional: 205hp/150kw @ 3100-3500 rpm

Maximum Torque: 317 lb ft/430Nm @ 1500-2600 rpm,

Optional: 347 lb ft/470Nm @ 1400-3000 rpm

Emissions Technology: Exhaust Gas Recirculation System

Total Displacement: FIC: 3.0 litre

Exhaust: Muffler horizontally positioned on the right side and tailpipe located mid-way down right side of vehicle

FRONT AXLE & SUSPENSION

- IVECO 5823

Capacity: 2500 kg

Suspension Type: Independent with adjustable steel torsion bar

Capacity: 2500 kg

REAR AXLE & SUSPENSION

- IVECO 450517 full-floating single reduction

Capacity: 5350 kg

Suspension Type: Semi elliptical spring

Optional: ECAS - Rear air suspension

Capacity: 5350 kg

Rear axle ratio: 4.30:1 with 170hp

- 4.556 with 205hp

Optional: 5.13:1 with 205hp

Optional: Driver Controlled Differential Lock

BRAKES

Type: ESP 9 + ABS + ASR 9 with EBD (Electronic Brakeforce Distribution) and Hill Holder

Front / Diameter: Ventilated disc brakes / 306 mm (28mm thick)

Rear / Diameter: Disc brakes / 306 mm (22mm thick)

Parking brake: Manual brake operating on rear axle

Service brakes: Dual circuit with vacuum servo


- Pad wear warning light for front and rear brakes

STEERING

- Power steering
- 390mm diameter steering wheel with telescopic adjustment

FUEL SYSTEM

- 100 litres with fuel cap location on passenger side

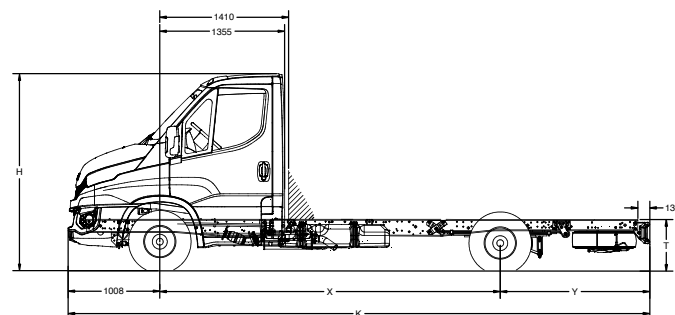

TRANSMISSION

- 6 speed synchromesh overdrive manual

Type: 2840.6 OD – with 170hp

1st 5.375, 2nd 3.154, 3rd 2.041, 4th 1.365, 5th 1.000, 6th 0.791 OD, Rev. 4.838

Type: 2850.6 DOD – with 205hp

1st 4.655, 2nd 2.480, 3rd 1.440, 4th 1.000, 5th 0.796 OD, 6th 0.685 DOD, Rev. 4.189

- 8 Speed ZF Torque Converter Automatic (Hi-Matic)

Type: 8V470A

1st 4.696, 2nd 3.130, 3rd 2.104, 4th 1.667, 5th 1.285, 6th 1.000, 7th 0.839 OD, 8th 0.667, Rev. 3.297

CLUTCH

- Single dry plate
- Hydraulically controlled

Diameter: 280mm – with 170hp

305mm – with 205hp

CHASSIS

- C Section steel longitudinal side members with tapered ends and tubular cross members.

ELECTRICAL SYSTEM

Battery: 12V – 110 Ah

Smart Alternator: 12V – 180 A

- Trailer wiring to rear of chassis

WHEELS & TYRES

Wheels: 6J x R16

Tyres: 225/75 R16

CABIN FEATURES

- Driver, passenger and curtain airbags with seat belt pretensioners
- Heated, suspended and fully adjustable driver's seat with headrest
- Dual bench passenger seats with headrests, extractable table and storage underneath
- Cruise control
- Electric windows
- Exterior mirror with integrated wide angle and direction indicators, heated and electronically adjustable
- Overhead console with storage shelf and space for additional equipment
- Large dual storage pockets in doors
- Document storage compartment
- Body builder connections
- Additional in-dash storage
- ECO function (170hp)
- Automatic climate control

DASHBOARD

- Analogue electronic speedometer
- Electronic tachometer
- Fuel level indicator with reserve light indicator
- Coolant temperature indicator with high temperature indicator light
- Instrument light dimmer switch
- Dash-mounted gear lever
- 3 storage areas on top of dash
- LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation (dip/main); clock, speed limit exceeding, temperature and service indicator
- IVECONNECT multimedia system including MP3 player, USB and AUX connectivity, bluetooth with steering controls

SECURITY

- Central locking with remote control
- Steering lock
- Engine immobiliser

OPTIONS

- Heated, suspended and fully adjustable single passenger seat
- 4495kg Gross Vehicle Mass (GVM) with 7995kg Gross Combination Mass (GCM) rating with 3.5T towing capacity

IVECO

Your partner for sustainable transport