



DAILY **SPECIFICATIONS** 50CD

DIMENSIONS (mm)

х	Wheelbase	3450	3750	4100	4350
K	Overall length	5943	6553	6953	7373
Н	Overall height unladen	2294	2287	2280	2277
	Front track	1724	1724	1724	1724
	Rear track	1542	1542	1542	1542
т	Unladen frame height at end of frame	728	733	782	726
	Front ground clearance	196	196	196	196
	Rear ground clearance	177	177	177	177
Υ	Rear overhang	1485	1795	1845	2015
	Turning circle: kerb to kerb	11876	13466	14564	15348
	Turning circle: wall	12536	14090	15190	15976

BODY DIMENSIONS (mm)

Maximum body width	2350	2350	2350	2350

MASS (kg)

GVM	4495	4495	4495	4495
GCM	7995	7995	7995	7995
GVM (Option)	5000	5000	5000	5000
GCM (Option)	8500	8500	8500	8500
Towing capacity with braked trailer	3500	3500	3500	3500
Front axle capacity	2100	2100	2100	2100
Rear axle capacity	3700	3700	3700	3700
Kerb mass front axle	1490	1502	1532	1539
Kerb mass rear axle	718	718	711	717
Kerb mass total*	2208	2220	2243	2256
Payload capacity	2287 2792**	2275 2780**	2252 2757**	2239 2744**

^{*} Kerb masses are with minimal fuel, spare wheel, tools and no driver

ENGINE

IVECO FIC (EURO 5)

Type: 170hp: 4 stroke diesel with direct-injection, Variable Geometry Turbocharger (VGT)

Optional: 205hp: IVECO FIC (EURO 5) - 4 stroke diesel with direct-injection, Twin Stage

Turbo (TST) and intercooler

Maximum Output: 170hp/125kw @ 2900-3500 rpm, Optional: 205hp/I50kw @ 3100-3500 rpm

Maximum Torque: 317 lb ft/430Nm @ 1650-2500 rpm,

Optional: 347 lb ft/470Nm @1400-3000 rpm

Emissions Technology: Exhaust Gas Recirculation system

Total Displacement: FIC: 3.0 litre

Exhaust: Muffler horizontally positioned on the right side and tailpipe located mid-way

down right side of vehicle

FRONT AXLE & SUSPENSION

IVECO 5819 Capacity: 2100 kg

Suspension Type: Independent with adjustable steel torsion bar

Capacity: 2100 kg

REAR AXLE & SUSPENSION

IVECO 450511 full-floating single reduction

Capacity: 3700 kg

Suspension Type: Semi elliptical spring **Optional:** ECAS - Rear air suspension

Capacity: 3700 kg Rear axle ratio: 4.44:1 • 5.11:1 option with 205hp

Optional: Driver Controlled Differential Lock

Type: ESP 9 + ABS + ASR 9 with EBD (Electronic Brake force Distribution) and Hill Holder

Front / Diameter: Ventilated disc brakes / 290 mm (28mm thick)

Rear / Diameter: Disc brakes / 290 mm (22mm thick) Parking brake: Manual brake operating on rear axle


Service brakes: Dual circuit with vacuum servo · Pad wear warning light for front and rear brakes

STEERING

- Power steering
- 390mm diameter steering wheel with telescopic adjustment

FUEL SYSTEM

100 litres with fuel cap location on passenger side

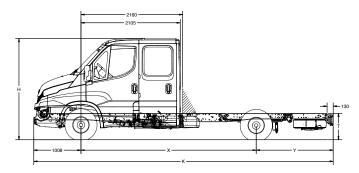

TRANSMISSION

6 speed synchromesh overdrive manual

Type: 2840.6 OD with 170hp

Ist 5.375, 2nd 3.154, 3rd 2.041, 4th 1.365, 5th 1.000, 6th 0.791 OD, Rev.4.838

Type: 2850.6 DOD with 205hp

Ist 4.655, 2nd 2.480, 3rd I.440, 4th I.000, 5th 0.796, 6th 0.685, Rev. 4.189

8 Speed ZF Torque Converter Automatic (Hi-Matic)

Type: 8V470A

Ist 4.696, 2nd 3.130, 3rd 2.104, 4th 1.667, 5th 1.285, 6th 1.000, 7th 0.839 OD, 8th 0.667 DOD, Rev. 3.297

CLUTCH

- Single dry plate
- · Hydraulically controlled

Diameter: 280 mm with 170hp

305mm with 205hp

CHASSIS

Type: C Section steel longitudinal side members with tapered ends and tubular cross members

ELECTRICAL SYSTEM

Battery: 12 Volt - 110 Ah Smart Alternator: 12 Volt - 180 A Trailer wiring to rear of chassis

WHEELS & TYRES

Wheels: Steel 5| x RI6 Tyres: 195/75 R16

CABIN FEATURES

- Driver, passenger and curtain airbags with seat belt pretensioners
- Heated, suspended and fully adjustable driver's seat with headrest
- Dual bench passenger seats with headrests, extractable table and storage underneath
- Electric windows
- Exterior mirror with integrated wide angle and direction indicators, heated and
 - electronically adjustable
- Overhead console with storage shelf and space for additional equipment
- Large dual storage pockets in doors
- Document storage compartment
- Body builder connections
- Additional in-dash storage ECO function (170hp)
- Automatic climate control

DASHBOARD

- Analogue electronic speedometer
- Electronic tachometer
- Fuel level indicator with reserve light indicator
- Coolant temperature indicator with high temperature indicator light
- Instrument light dimmer switch
- Dash-mounted gear lever
- 3 storage areas on top of dash
- LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation, clock, speed limit exceeding, external temperature and service
- IVECONNECT multimedia system including MP3 player, USB and AUX connectivity, bluetooth with steering controls

SECURITY

- Central locking with remote control
- Steering lock
- · Engine immobiliser

Heated, suspended and fully adjustable single passenger seat



^{**} Option