



480 | 530 Specification sheet





| ENGINES |
|--------------------------------|
| CF 480 MX-13 (330 kW / 483 hp) |
| CF 530 MX-13 (390 kW / 530 hp) |

| GVM | GCM |
|----------------------|-----------|
| 32,300 kg | 70,000 kg |
| | |
| Max. front 14,200 kg | |
| Max. rear 18,100 kg | |





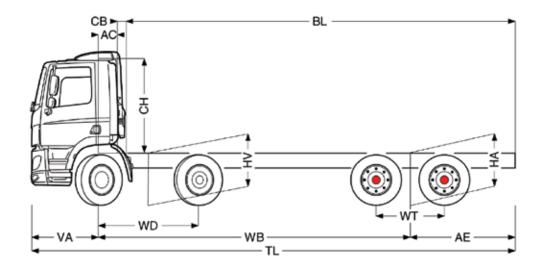



| | Wheelbase - AE | | Unladen Weight¹) | | | Variable Dimensions | | | | | | | | |
|----------------|----------------|------|------------------|------|-------|---------------------|------------------|------------------|------|-------|------------------|------------------|------------------|------------------|
| - | WB | AE | Front | Rear | Total | AC | CB ²⁾ | CH ³⁾ | BL | TL | HA ⁴⁾ | HA ⁵⁾ | TK ⁶⁾ | TW ⁷⁾ |
| DAY | 6.40 | 3.70 | 6200 | 3350 | 9550 | 0.39 | 0.18 | 1.94 | 9.53 | 11.47 | 1.05 | 1.07 | 22.70 | 23.95 |
| | WB | AE | Front | Rear | Total | AC | CB ²⁾ | CH ³⁾ | BL | TL | HA ⁴⁾ | HA ⁵⁾ | TK ⁶⁾ | TW ⁷⁾ |
| SLEEPER CAB | 6.40 | 3.70 | 6270 | 3350 | 9620 | 0.82 | 0.18 | 1.94 | 9.10 | 11.47 | 1.05 | 1.07 | 22.7 | 23.95 |
| | WB | AE | Front | Rear | Total | AC | CB ²⁾ | CH ³⁾ | BL | TL | HA ⁴⁾ | HA ⁵⁾ | TK ⁶⁾ | TW ⁷⁾ |
| SPACE | 6.40 | 3.70 | 6395 | 3350 | 9745 | 0.82 | 0.18 | 2.62 | 9.10 | 11.47 | 1.05 | 1.07 | 22.7 | 23.95 |

OTHER DIMENSIONS VA: 1.37 WD: 2.00 WT: 1.40 HV®: 1.08 HV®: 1.02 RB: 0.79 SB: 1.82 TB¹⁰: 2.48

- Chassis and cab weight calculated with: Standard specification items only, less fuel, AdBlue and driver, tolerance ± 3%. Changing of the specification can have a major impact on vehicle weight.
- 2. CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cab roof hatch. With air intake on cab roof add 0.21 m.
- 4. Unladen height at centre of driven axle(s).

- 5. Laden height at centre of driven axle(s).
- 6. TK = turning circle between kerbs.
- 7. TW = turning circle between walls.
- 8. Unladen height at centre of front axle(s).
- 9. Laden height at centre of front axle(s).10. TB is overall width at rear.

Note: All dimensions are in metres (m) and weights in kilograms (kg).

CAB EXTERIOR

Day Cab with galvanised steel bumper, tinted glass and electric window openers; Cab width 2300 mm; External sun visor green translucent; LED head lights; Fog lights and cornering lights; Main mirrors and wide angle mirrors electrically heated and adjustable. Air horns.

Optional

• Sleeper Cab

Space Cab

AERODYNAMICS

Optional

· Adjustable roof deflector

Side collars

COLOURS

Cab colour M8870 White; Head lamp panel and bumper colour M8870 White; Chassis colour black.

Optional

· Other cab colours available

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat Luxury Air; Co-driver seat Basic; Lower bunk mattress; Automatic Temperature Control; Roof hatch aluminium, manual control; Pollen filter.

Optional

- Leather steering wheel
- Exclusive cab interior trim colour
- Driver Seat: Xtra Leather Air (Exclusive interior only)
- Passenger Seat: Xtra Leather Air (Exclusive interior only)
- Third Seat (Day Cab only)

COMMUNICATION AND DRIVING MANAGEMENT

AM/FM Premium Multimedia System with phone, navigation and telematics functionality, 2x GSM antennas, 1 x GPS antenna, 1 x DAB radio antenna.

SAFETY AND SECURITY

Adaptive Cruise Control (ACC); Forward Collision Warning (FCW); Advanced Emergency Braking System (AEBS); Lane Departure Warning System (LDWS); Vehicle Stability Control (VSC); Protective cab suspension and construction; Air bag (driver) and 2 seat belt tensioners; Reverse warning; Basic engine immobiliser system.

SUSPENSION AND AXLES

Front: 2x 7,100 kg, parabolic leaf springs.

Rear: 2x 9,050 kg, air suspension; SR1360T; Axle load monitoring.

WHEELS AND TYRES

Front axle 1: 295/80R22.5; Front axle 2: 295/80R22.5; Rear axle 1: 11R22.5; Rear axle 2: 11R22.5; Alcoa Brushed alloy wheels.

Optional

• Alcoa Dura-Bright alloy wheels

DRIVELINE

Engine MX-13, multi torque 6 cylinder diesel engine, 12.9 litres. Output 480 hp at 1,600 rpm, maximum torque 2,500 Nm at 900-1,125 rpm, Exhaust emission Euro 6, 5 minute engine idle shut down, ZF TraXon Automated gearbox, 12 speeds, Gearbox ratio 12.92-0.77, rear axle ratio 3.40, ASR.

Optional

• Automated gearbox, TraXon, 16 speeds

BRAKE SYSTEM

MX Engine Brake; Park brake control with test position; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode.

Optional

ZF Intarder

CHASSIS

Wheelbase 6.40 m / rear overhang 3.70 m; Side member height 310 mm; Exhaust pipe horizontal, low; Aluminium fuel tank 430 l, height 620 mm; LED rear light unit; Spray suppression; Front Underrun Protection System (FUPS); AdBlue tank 45 litres on left-hand chassis.



POWER TAKE-OFF (PTO)

Various PTO types and positions.

ELECTRICAL POWER SUPPLY

Alternator 80 A; Batteries 2x 175 Ah.

GVM AND GCM

Chassis weight related technical GVM max 32,300 kg; Driveline related max GCM 70,000 kg.



DAY CAB



SLEEPER CAB

APPLICATION CONDITIONS

Cyclonic air intake behind the cab.

VEHICLE WARRANTY

3 year / 750,000km warranty.



SPACE CAB

DAF Trucks Australia 66 Canterbury Road Bayswater VIC 3153 Phone (03) 9721 1600

