

The Feka VS is a submersible pump with a vortex impeller, suitable for pumping dirty water containing soft solids up to 50 mm in diameter.

FEATURES:

Thermal Protection Overload

- Protected against any accidental overload by built in protection

Continual Running

- When fully submerged the Feka VS can continually run 24/7

Complete Package

- Supplied with 10 metres of lead, plug and adjustable float switch

OPERATING CONDITIONS:

Liquid temperature

0°C to +50°C

Maximum ambient temperature

+40°C

Maximum immersion depth

10 metres

CONSTRUCTION:

Materials

- Stainless steel 304 pump body, seal cover, motor casing and handle
- Stainless steel 316 motor shaft
- Microcasting stainless steel impeller
- Double mechanical seal including hard wearing silicon carbide/ silicon carbide on pump side

Voltage

1 x 230 V, 50 Hz

Protection level


IP68

Insulation class


F



PERFORMANCE GRAPH:

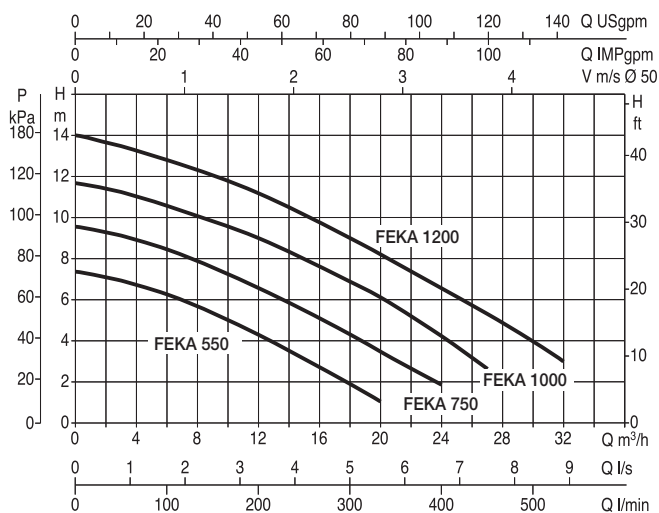

DIMENSIONS:

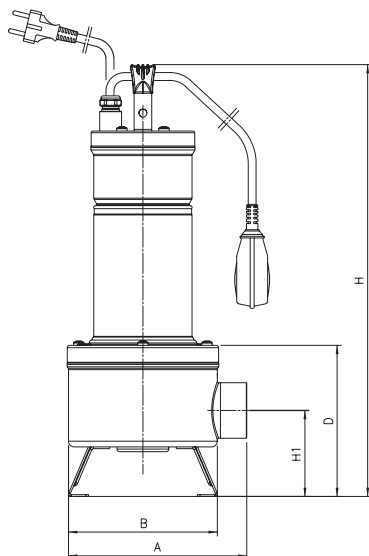

TECHNICAL DATA:

Pump Model	Cable (m)	P2 (kW)	1 ph In (A)	Water Temp (°C)	Outlet	Weight (kg)	Dimensions (mm)					l/min m3/h	0	100	200	300	400	500	LIST Price (incl. GST)
							A	B	D	H	H1		0	6	12	18	24	30	
FEKA VS 550 M-A	10	0.55	4.20	0/50	2" F	16.3	203	170	172	492	98	m/head	7.4	6.2	4.1	1.8	-	-	\$1,006.00
FEKA VS 750 M-A	10	0.75	5.13	0/50	2" F	17.5	203	170	172	492	98		9.6	8.5	6.7	4.3	1.9	-	\$1,144.00
FEKA VS 1000 M-A	10	1.00	6.63	0/50	2" F	19.3	203	170	172	537	98		11.8	10.5	9.0	6.8	4.1	-	\$1,438.00
FEKA VS 1200 M-A	10	1.20	8.63	0/50	2" F	20.8	203	170	172	537	98		14.0	12.8	11.2	9.0	6.7	4.0	\$1,553.00