

# Product Manual

Accent 100 IP Directional Type 2



IILUS

# Accent 100 IP Directional Type 2






Recessed ceiling luminaire with rotationally symmetrical flood or wide flood optics, high colour reproduction, directional orientation, adjustable depth mechanism for optical assembly. Combine with optical lens and anti-glare accessories for oval, wide spread, or diffuse beam control. High pressure die-cast powdercoated facade with expressed detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection.


## System

<b>Power</b>	8W / 7W / 14W
<b>Current</b>	180mA / 350mA
<b>Colour Temperature</b>	2700°K / 3000°K / 4000°K / 2700-1800°K Dim to Warm
<b>Lumen Maintenance</b>	L90 B10 50 000hr
<b>CRI</b>	Ra97
<b>Tm30</b>	R95 F103
<b>Chromacity</b>	<2 SCDM
<b>Articulation</b>	355° Rotation / 0-30° Tilt
<b>Cut-Out</b>	92mm Round x 115-135mm (7W/8W) / 155-175mm (14W) Depth
<b>Ingress Protection</b>	IP44

		<b>FL - 25°</b>	<b>MFL - 40°</b>	<b>WFL - 60°</b>
<b>8W</b>	<b>2700°K</b>	576lm	626lm	624lm
	<b>3000°K</b>	642lm	680lm	672lm
	<b>4000°K</b>	610lm	615lm	650lm
<b>7W</b>	<b>2700-1800°K</b>	454lm	493lm	492lm
<b>14W</b>	<b>2700°K</b>	874lm	863lm	882lm
	<b>3000°K</b>	952lm	931lm	965lm
	<b>4000°K</b>	1044lm	1020lm	1049lm



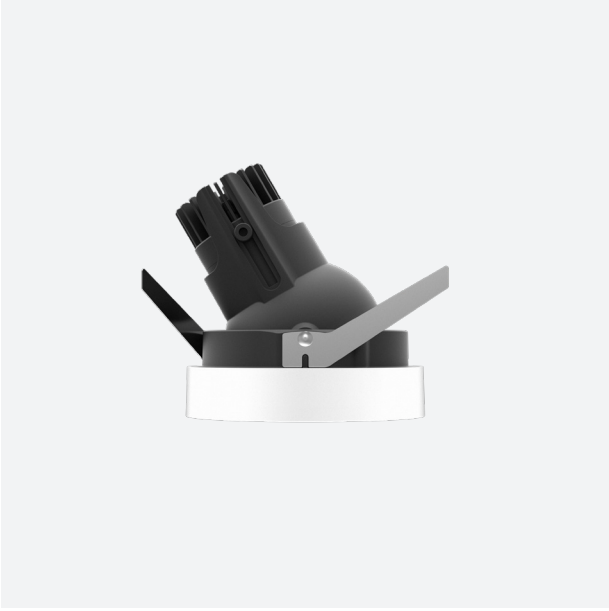

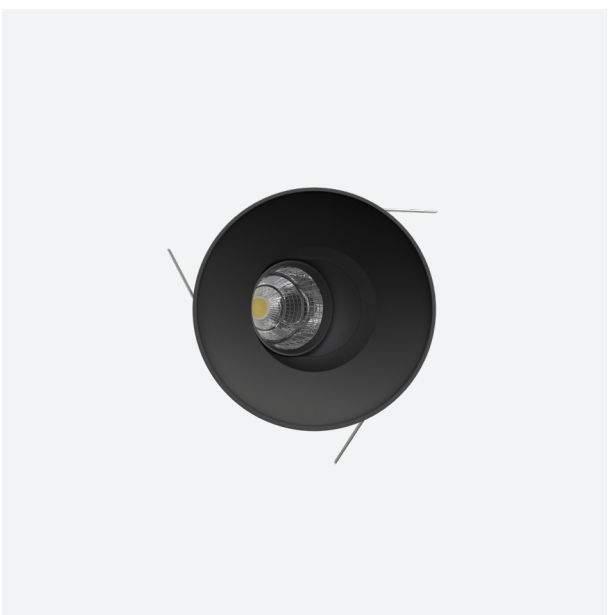

# Model References

	FL - 25°	MFL - 40°	WFL - 60°			
<b>8W 2700°K</b>	100 10 007200.011	100 10 007201.011	100 10 007202.011	○	White	Fixed Output
	100 10 007200.021	100 10 007201.021	100 10 007202.021	●	Black	Fixed Output
	100 10 007200.012	100 10 007201.012	100 10 007202.012	○	White	Phase DIM
	100 10 007200.022	100 10 007201.022	100 10 007202.022	●	Black	Phase DIM
	100 10 007200.013	100 10 007201.013	100 10 007202.013	○	White	DALI
	100 10 007200.023	100 10 007201.023	100 10 007202.023	●	Black	DALI
<b>8W 3000°K</b>	100 10 007203.011	100 10 007204.011	100 10 007205.011	○	White	Fixed Output
	100 10 007203.021	100 10 007204.021	100 10 007205.021	●	Black	Fixed Output
	100 10 007203.012	100 10 007204.012	100 10 007205.012	○	White	Phase DIM
	100 10 007203.022	100 10 007204.022	100 10 007205.022	●	Black	Phase DIM
	100 10 007203.013	100 10 007204.013	100 10 007205.013	○	White	DALI
	100 10 007203.023	100 10 007204.023	100 10 007205.023	●	Black	DALI
<b>8W 4000°K</b>	100 10 007206.011	100 10 007207.011	100 10 007208.011	○	White	Fixed Output
	100 10 007206.021	100 10 007207.021	100 10 007208.021	●	Black	Fixed Output
	100 10 007206.012	100 10 007207.012	100 10 007208.012	○	White	Phase DIM
	100 10 007206.022	100 10 007207.022	100 10 007208.022	●	Black	Phase DIM
	100 10 007206.013	100 10 007207.013	100 10 007208.013	○	White	DALI
	100 10 007206.023	100 10 007207.023	100 10 007208.023	●	Black	DALI
<b>7W 2700-1800°K</b>	100 10 007209.011	100 10 007210.011	100 10 007211.011	○	White	Fixed Output
	100 10 007209.021	100 10 007210.021	100 10 007211.021	●	Black	Fixed Output
	100 10 007209.012	100 10 007210.012	100 10 007211.012	○	White	Phase DIM
	100 10 007209.022	100 10 007210.022	100 10 007211.022	●	Black	Phase DIM
	100 10 007209.013	100 10 007210.013	100 10 007211.013	○	White	DALI
	100 10 007209.023	100 10 007210.023	100 10 007211.023	●	Black	DALI
<b>14W 2700°K</b>	100 10 007212.011	100 10 007213.011	100 10 007214.011	○	White	Fixed Output
	100 10 007212.021	100 10 007213.021	100 10 007214.021	●	Black	Fixed Output
	100 10 007212.012	100 10 007213.012	100 10 007214.012	○	White	Phase DIM
	100 10 007212.022	100 10 007213.022	100 10 007214.022	●	Black	Phase DIM
	100 10 007212.013	100 10 007213.013	100 10 007214.013	○	White	DALI
	100 10 007212.023	100 10 007213.023	100 10 007214.023	●	Black	DALI
<b>14W 3000°K</b>	100 10 007215.011	100 10 007216.011	100 10 007217.011	○	White	Fixed Output
	100 10 007215.021	100 10 007216.021	100 10 007217.021	●	Black	Fixed Output
	100 10 007215.012	100 10 007216.012	100 10 007217.012	○	White	Phase DIM
	100 10 007215.022	100 10 007216.022	100 10 007217.022	●	Black	Phase DIM
	100 10 007215.013	100 10 007216.013	100 10 007217.013	○	White	DALI
	100 10 007215.023	100 10 007216.023	100 10 007217.023	●	Black	DALI
<b>14W 4000°K</b>	100 10 007218.011	100 10 007219.011	100 10 007220.011	○	White	Fixed Output
	100 10 007218.021	100 10 007219.021	100 10 007220.021	●	Black	Fixed Output
	100 10 007218.012	100 10 007219.012	100 10 007220.012	○	White	Phase DIM
	100 10 007218.022	100 10 007219.022	100 10 007220.022	●	Black	Phase DIM
	100 10 007218.013	100 10 007219.013	100 10 007220.013	○	White	DALI
	100 10 007218.023	100 10 007219.023	100 10 007220.023	●	Black	DALI
<b>Accessories</b>	980 00 004301.010	Hex Louvre 043				
	980 00 004302.000	Spreader Lens 043				
	980 00 004303.000	Linear Spreader Lens 043				
	980 00 004304.000	Diffuser Lens 043				

iilus.com