


# Neonflex Linea Top Bendable

Uniform illumination

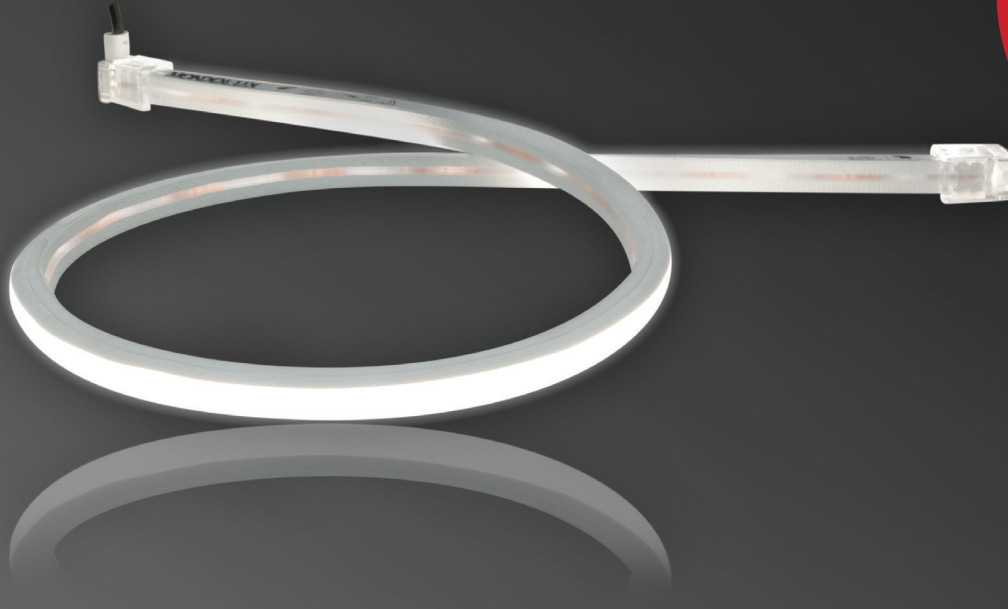

**NEW**

- High-performance, uniform illumination
- Fully encapsulated providing IP67 protection
- Variety of Installation accessories
- Customised lengths available in multiples of 50mm
- CCT range: 2700K-6500K
- 24V DC Extra Low Voltage

**ENQUIRE NOW**

# Neonflex Linea Top Bendable





mondolux.com.au

Introducing the latest in LED Neonflex technology: Neonflex Linea Top Bendable, using SMD chips closely spaced on a flexible housing. Features include enhanced durability and weather resistance with a fully encapsulated housing reaching an IP67 rating making it suitable for extreme weather conditions. With a wider range of accessories including stainless steel end caps, live ends and mounting clips, Neonflex Linea Top Bendable suits a variety of installations including indoor or outdoor façade, accent, decorative and feature lighting.

## Available Options:

- Lumen Output: 660lm/m
- System Power: 10W/m
- Beam Angle: 120°
- IP67 Rated
- Dimming Options: 0-10V, Phase cut, DALI, Casambi Wireless
- Finish: White
- Colour Temperature (CCT): 2700K-6500K
- Colour Rendering Index (CRI): CRI>90
- Multiple Accessories: SS End Cap, Different Live End Options: Front, Side and Bottom Live End with Side Cable, Mounting Clips: Standard Clip, Aluminum profile, Curve SS profile

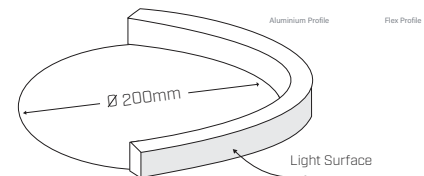

Maximum bend radius of 200mm

## Code Information

Family Code +	Product +	Installation Type +	PCB Width +	Chip Model +	CRI +	CCT +	LEDs/m +	Voltage +	IP +
ML = Mondolux Linear	61 = Neonflex Linea Top	SM = Surface Mounted	5 = 12mm	2 = SMD2835	9 = CRI90	27 = 2700K	120 = 120	24V = 24V	IP67 = IP67
						30 = 3000K			
						40 = 4000K			
						65 = 6500K			

Example: ML61SM52-930-120-24V-IP67

Mondolux Neonflex Linea Top Bendable Surface Mounted 10W 24V DC SMD2835 120° CRI90 3000K 660lm 120LEDs IP67 1000mmx12mmx12mm 50mm Cuttable Length

Example: ML61SM52-940-120-24V-IP67

Mondolux Neonflex Linea Top Bendable Surface Mounted 10W 24V DC SMD2835 120° CRI90 4000K 660lm 120LEDs IP67 1000mmx12mmx12mm 50mm Cuttable Length

T 1300 601 931

E sales@mondolux.com.au