


Timber Panel Wall Installation


Warnings



- ! Two-Person Operation
- ! Ensure the wall is placed on a flat, solid surface
- ! Walls are not designed for Exterior Use in wet or windy weather
- ! Place in a location where rear access to the wall is restricted, e.g. up against an existing wall, to prevent injury if wall falls backward

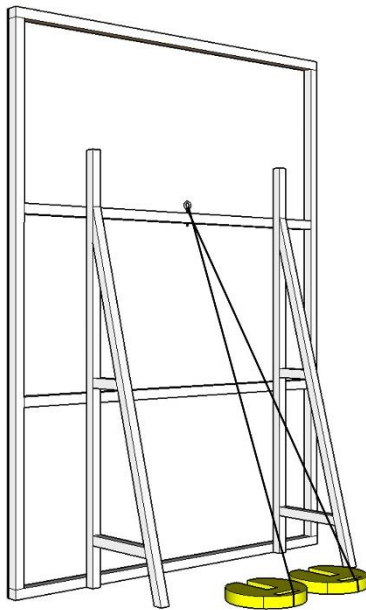

INTERIOR WEIGHT
30kg

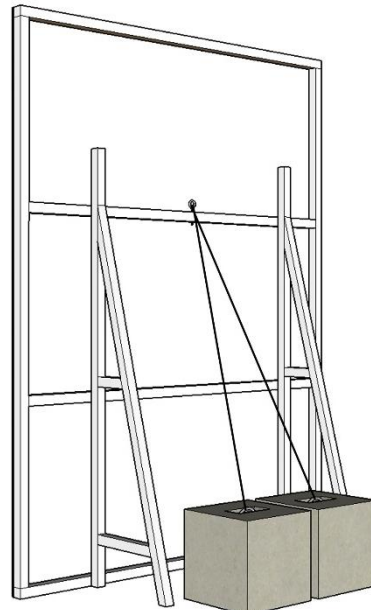

EXTERIOR WEIGHT
140kg

Instructions

1. Place weights 500-700mm behind where you will set the wall
 - a. Warning! 70kg Blocks for Exterior Use are a 2-Person Lift
2. Lift the wall into place using one person on each long side of the wall
3. Person A holds the wall upright, Person B Opens the leg supports
4. Person A continues to hold the wall upright while Person B ties off to the weights using an Adjustable Grip Hitch

Adjustable Grip Hitch:

