

Junttan HHK 10/12/14S Hydraulic Impact Hammer

Configuration (mode)

		_	
Attribute	10S	12S	14S
Ram block mass	10,000kg	12,000kg	14,000kg
Max drop height	1500mm	1500mm	1500mm
Max impact energy	147kN.m	176kN.m	206kN.m
Blow rate at max stroke	30bpm	30bpm	30bpm
Max working pressure	135bar	162bar	189bar
Hammer weight (including 45m hose set, excluding sleeve)	10t	12t	14t
1,280mm d/cap & housing (included)	20,600kg	23,400kg	26,200kg


Sleeve Attachments

Inside Diameter: 1240mm

Length: 2250mm Weight: 1600kg

Environmental Advantages

- Low impact noise
- No exhaust gas
- Less vibration
- Boidegradable hydraulic oil used

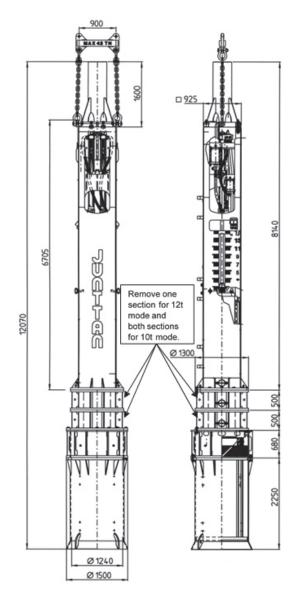

T +61 7 4724 2200 **F** +61 7 4724 2208

11-15 Sandspit Drive South Townsville PO Box 1155 Townsville QLD 4810 Australia info@pacificmarinegroup.com.au www.pacificmarinegroup.com.au

TOWAGE & BARGES • COMMERCIAL DIVING • MARINE CONSTRUCTION • VESSEL HIRE

Junttan Powerpack 15ccu

Specifications

Length: 3995mm Width: 1730mm Height: 2225mm Total Weight: 8400kg

Performance

Power: 298kW (400hp) Max Pressure: 350bar Max Oil Flow: 760L/min

Capacities

Fuel Capacity: 760L

Hydraulic Oil capacity: 1900L



Junttan iPiler System

Optimised productivity and increased safety for the piling process. Process planning can start at the office when pile information of the project is set up in the PMO - piling management software.

Features

- Improved safety and working conditions
- Increased productivity
- Increased quality in pile driving process



Note: All PMG piling equipment is filled with bio-degradable hydraulic oil, which is not only environmentally friendly / fully biodegradable.