

# XF 530

FAT 6x4 Rigid



\*Some optional equipment maybe shown in this brochure

## ENGINE

Power: XF 530, PACCAR MX-13 (390 kW / 530 hp)  
Torque: 2,700 Nm @ 900 - 1,125 rpm

## GVM

25,600 kg

## GCM

70,000 kg

Max. front 7,500 kg

Max. rear 18,100 kg

## CAB EXTERIOR

- Day or Sleeper Cab, mechanical suspension
- Aerodynamic bottom plate
- Central door locks with 2 remote controls, 2 keys
- External sun visor midnight blue translucent
- Main mirrors
- Electrically adjustable mirrors
- LED head lights
- Head light beam for left-hand traffic
- Daytime running lights with fog & cornering lights in bumper

### Optional

- Double glazed window in rear cab wall

## CAB INTERIOR

- Soft grip steering wheel
- Grey dashboard finish
- Luxury air driver's seat with heating & armrest
- Foldable cinema passenger seat
- Centre console with open storage & dashboard table
- Sleeper Cab: Normal level lower bunk
- Refrigerator: 33L capacity
- Sleeper Cab: storage drawer under bunk
- Sleeper Cab: Curtains along windscreen & side windows
- Sleeper Cab: 'Xtra Comfort' pocket sprung mattress
- Air conditioning & Automatic Cab Climate Control
- Electric windows control
- 4 USB ports

## COLOURS

- Cab colour: White E1980
- Cab coloured side collar
- Cab coloured lamp/headlamp panel & bumper
- Cab coloured mirrors
- Chassis colour: Grey

### Optional

- Robust Bumper: Grey

## SUSPENSION & AXLES

- Front axle: 7.5t, parabolic, 165N
- Rear axle: 2 x 9.05t, DAF air, SR1360T
- Axle load monitoring

### Optional

- Front axle: 9.0t, parabolic, 187N
- Rear axle: 2 x 10.5t, DAF air, SR1360T
- Rear axle: 2 x 13.0t, DAF air, HR1670T Hub Reduction

## SAFETY SYSTEMS

- Manual isolation main switch
- SRS driver's air bag
- Anti-theft system, engine immobiliser
- Lane departure warning system
- Vehicle stability control
- Reverse warning alarm
- DAF corner view camera - 285 degree wide view
- Speed limiter setting 100 km/h
- Adaptive Cruise Control with Forward Collision Warning (FCW) & Advanced Emergency Braking System (AEBS)

### Optional

- DAF Side & Turn Assist

## COMMUNICATION

- FMS connector extended, prepared
- DAF infotainment system: 10.1" display with FM/DAB+, Apple CarPlay™ and Android Auto™ phone mirroring; 5 speakers
- Antennas: FM/DAB/DAB+ radio frequencies, 2 x cellular for use by mobile phones, GNSS for location purpose
- Driver Performance Assistant (DPA)

## DRIVELINE

- Engine: 390 kW (530 hp), PACCAR MX-13
- Euro 6 exhaust emission
- Auto engine stop 5 minutes
- Transmission: Auto, TraXon 16TX2640OD 16 speeds
- Gearbox ratio: 12.92-0.77
- Rear axle ratio: 3.40
- Mechanical differential lock with ASR
- ASR (anti-slip regulation) system

**WHEELS & TYRES**

- Front tyres: 315/80R22.5 158/150
- Rear tyres: 11R22.5 148/145
- Disc wheels aluminium, Alcoa Dura-Bright
- Wheel protection rings

**CHASSIS**

- Wheelbase 6.4m / rear overhang 3.7m
- Chassis rails: 310mm - 8.5mm
- EAS unit right, Exhaust discharge to the right-hand side
- Aluminum fuel tank 430L LHS, Height 620mm
- LED tail lamps
- Spray suppression
- Front Underrun Protection System (FUPS)
- Adblue tank 45L LHS

**Optional**

- Adblue tank 75L LHS
- Aluminum fuel tank 2x 430L LHS + RHS, Height 620mm
- Vertical Exhaust

**ELECTRICAL POWER SUPPLY**

- Alternator 110A, batteries 2 x 175Ah

**AERODYNAMICS**

- Roof spoiler adjustable high set with side collars long set

**BODY & PREPARATION**

- Hardwired body signals and warnings
- Engine speed control connector
- Preparation for aftermarket switches
- J1939 CAN application connector

**VEHICLE DELIVERY**

- Standard toolkit

**BRAKE SYSTEM**

- MX Engine Brake
- Electro-pneumatic controlled park brake with Auto Apply functionality
- Disc brakes on front & rear axle(s)
- Spring brake cylinder on rear tandem axle 1 & 2

**DRAWBAR & TRAILER EQUIPMENT**

- Pneumatic trailer connection C type
- 24V trailer electric connection
- Low speed trailer brake
- 1 x 7 pin detachable EBS cable
- 1 x 7 pin detachable trailer lighting cable

**GVM / GCM**

- Max GVM 25,600 kg
- Max GCM 70,000 kg

**POWER TAKE OFF (PTO)**

- First gearbox PTO N../1c-Z

**Optional**

- Rear eng PTO 13h, clutch, pump drive

**APPLICATION CONDITIONS**

- Application class 2A
- Air intake front
- Moderate climate
- Maximum ambient temperature 50 degrees
- Heated fuel filter on engine
- Unheated fuel pre-filter on chassis
- Gearbox oil cooler

**Optional**


- Air intake high behind cab

**SERVICE & MAINTENANCE**

- Warranty: Vehicle 3yr, driveline 3yr / 750,000km
- Standard service interval

# XF 530

FAT 6x4 Rigid

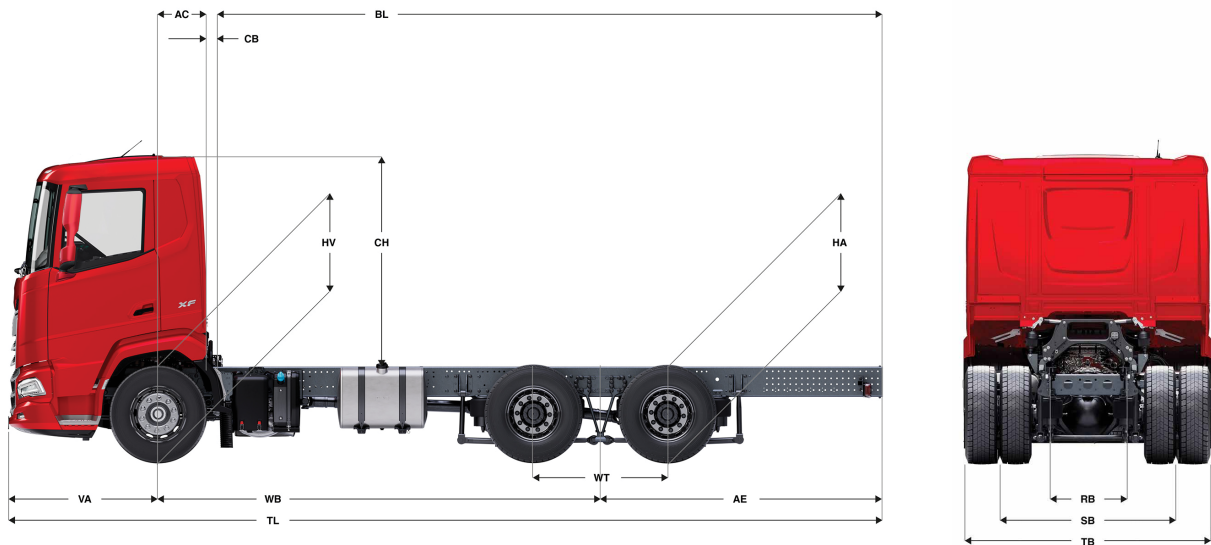

|             | Wheelbase |                 | Unladen Weight† |      |       | Gross Carrying Capacity |       |       | Variable Dimensions |                 |      |                 |       |                 |                 |                 |                 |
|-------------|-----------|-----------------|-----------------|------|-------|-------------------------|-------|-------|---------------------|-----------------|------|-----------------|-------|-----------------|-----------------|-----------------|-----------------|
|             | WB        | AE <sup>1</sup> | Front           | Rear | Total | Front                   | Rear  | Total | AC                  | CB <sup>2</sup> | CH   | BL <sup>3</sup> | TL    | HA <sup>4</sup> | HA <sup>5</sup> | TK <sup>6</sup> | TW <sup>7</sup> |
| DAY CAB     | 4.55      | 2.60            | 4407            | 3344 | 7751  | 2093                    | 13156 | 15249 | 0.50                | 0.25            | 2.49 | 6.40            | 8.68  | 1.05            | 1.04            | 15.44           | 16.86           |
|             | 5.00      | 3.00            | 4440            | 3376 | 7816  | 2060                    | 13124 | 15184 | 0.50                | 0.25            | 2.49 | 7.25            | 9.53  | 1.05            | 1.04            | 16.61           | 18.05           |
|             | 6.00      | 3.60            | 4467            | 3413 | 7880  | 2033                    | 13087 | 15120 | 0.50                | 0.25            | 2.49 | 8.85            | 11.13 | 1.05            | 1.04            | 19.16           | 20.63           |
|             | 6.40      | 3.70            | 4486            | 3432 | 7918  | 2014                    | 13068 | 15082 | 0.50                | 0.25            | 2.49 | 9.35            | 11.63 | 1.05            | 1.04            | 20.21           | 21.69           |
| SLEEPER CAB | 4.55      | 2.60            | 4515            | 3348 | 7863  | 1985                    | 13152 | 15137 | 0.83                | 0.25            | 2.49 | 6.07            | 8.68  | 1.05            | 1.04            | 15.44           | 16.86           |
|             | 5.00      | 3.00            | 4547            | 3380 | 7927  | 1953                    | 13120 | 15073 | 0.83                | 0.25            | 2.49 | 6.92            | 9.53  | 1.05            | 1.04            | 16.61           | 18.05           |
|             | 6.00      | 3.60            | 4575            | 3417 | 7992  | 1925                    | 13083 | 15008 | 0.83                | 0.25            | 2.49 | 8.52            | 11.13 | 1.05            | 1.04            | 19.16           | 20.63           |
|             | 6.40      | 3.70            | 4594            | 3436 | 8030  | 1906                    | 13064 | 14970 | 0.83                | 0.25            | 2.49 | 9.02            | 11.63 | 1.05            | 1.04            | 20.21           | 21.69           |

| Other Dimensions |      |                 |                 |      |      |                  |
|------------------|------|-----------------|-----------------|------|------|------------------|
| VA               | WT   | HV <sup>8</sup> | HV <sup>9</sup> | RB   | SB   | TB <sup>10</sup> |
| 1.53             | 1.40 | 1.07            | 1.04            | 0.79 | 1.82 | 2.48             |

† Chassis and cab weight calculated with: Standard specification items only with 300 litres of fuel, 45 litres of AdBlue® and driver of 100kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle(s).
- Laden height at centre of driven axle(s).
- Turning circle between kerbs.
- Turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- Overall width at rear. (At centre of front axle 255)

**Note: All dimensions are in metres (m) and weights in kilograms (kg)**

No rights can be derived from this publication. DAF Trucks Australia reserves the right to change product specifications without prior notice. For the most recent information, contact your authorised DAF dealer.

DAF Trucks Australia  
66 Canterbury Road  
Bayswater VIC 3153  
Phone (03) 9721 1500