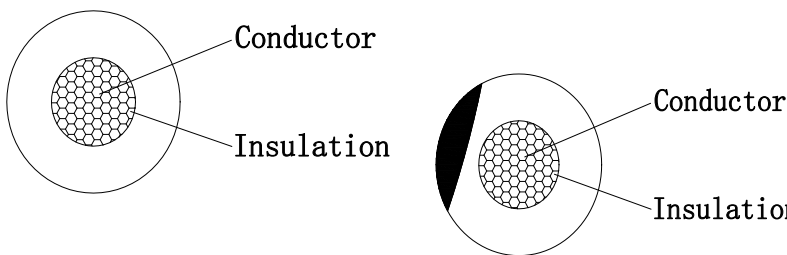


SPECIFICATION FOR APPROVAL

1.Construction			Revision:	A/0	Form No.	B274-0
STYLE		HO7V-K	CONSTRUCTION D.W.G 			
RATING		70°C 450/750V				
STANDARD		DIN VDE0281.3				
Conductor	mm ²	4				
	Material	Tinned copper				
	Cond.Size	52/ (0.30±0.008)				
	Stranged OD.(mm)	2.50				
Insulation	Material	PVC	4.Marking			
	Nominal OD. (mm)	4.30±0.20				
	Nominal Thickness (mm)	0.80	▲ TÜV H07V-K 4.0mm ² 450/750V WUXI XINHONGYE WIRE & CABLE CO., LTD RoHS COMPLIANT (two times) >1< ▲ TÜV H07V-K 4.0mm ² 450/750V WUXI XINHONGYE WIRE & CABLE CO., LTD RoHS COMPLIANT (two times) >2<>100< Note: The length of tail from >100< to the next starting of >1< is 1 meter.			
	Min Thickness (mm)	0.62				
Color	Optional					
2. Physical Properties						
Item		Specification				
Elongation	Un-aged	≥ 125%	5.Standard			
Strength		≥ 12.5Mpa				
			6.Packing			
			WUXI XINHONGYE WIRE & CABLE CO., LTD. NO.17 Hexin Road,Xishan District,Wuxi,Jiangsu,China TEL:86-510-68780888 FAX:86-510-68780858 E-mail: sales@xhycable.com			
3.Electrical Properties						
Item		SPECIFICATION	Part No.	H07T400-XX-004	批准 (客户)	
Conductor Resistance AT 20°C		≤ 5.09 Ω /km	Serial No.	001		
Dielectric-withstand test		2500VAC/5Min	Approved	赵也		
Spark test		6000VAC	Checked	/		
			Drawing	唐云		
			Date	2017-3-2		