


- Budget priced, high performance, one piece construction, metal downlight.

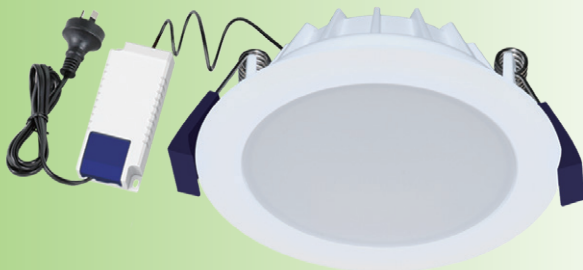

Low cost

FEATURES

- Die-cast aluminium heat sink
- High efficiency SMD LED chips
- Constant current driver
- Opal polycarbonate diffuser
- IP54 weatherproof
- IC-4 Rating. May be installed under ceiling insulation or against timber structure

DIMMING OPTIONS

- Trailing & Leading Edge
- Universal

INCLUDES

- Fixed head LED downlight
- Dimmable LED driver
- 1.2 m flex & plug

APPLICATIONS

- Residential
- Hotels & Shops
- Conference Rooms
- Reception areas
- Bathrooms and Wet areas

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION			IP RATING	DIMMABLE	DISTRIBUTION	DIMENSIONS(mm)
				 leading and trailing edge		

Part No.	Voltage	Watt.	PF	CCT.	Ra	Lumen	Beam Angle	Lifetime L70B50	Fitting Colour
172027	220-240V	11W	0.9	3000K	≥80	800lm	110°	35000h	White
172028	220-240V	11W	0.9	4000K	≥80	850lm	110°	35000h	White
172065	220-240V	11W	0.9	5000K	≥80	850lm	110°	35000h	White

Part No.	Model No.	Driver Model No.	VEET Status	IPART Status
172027	YKRS3E1A-D	YKD12CC270D	Approved VEET No.: 3899	Approved IPART No.: 24143S12-RDFGCEEN
172028	YKRS3E1A-D	YKD12CC270D	Approved VEET No.: 3899	Approved IPART No.: 24143S12-RDFGCEEN
172065	YKRS3E1A-D	YKD12CC270D	Approved VEET No.: 3899	Approved IPART No.: 24143S12-RDFGCEEN

[1] Operating Frequency=50/60Hz

[2] Switch Times≥20000

[3] This fitting is IP54 only once installed

[4] For dimming compatibility please see page 85