


- High efficiency panel.

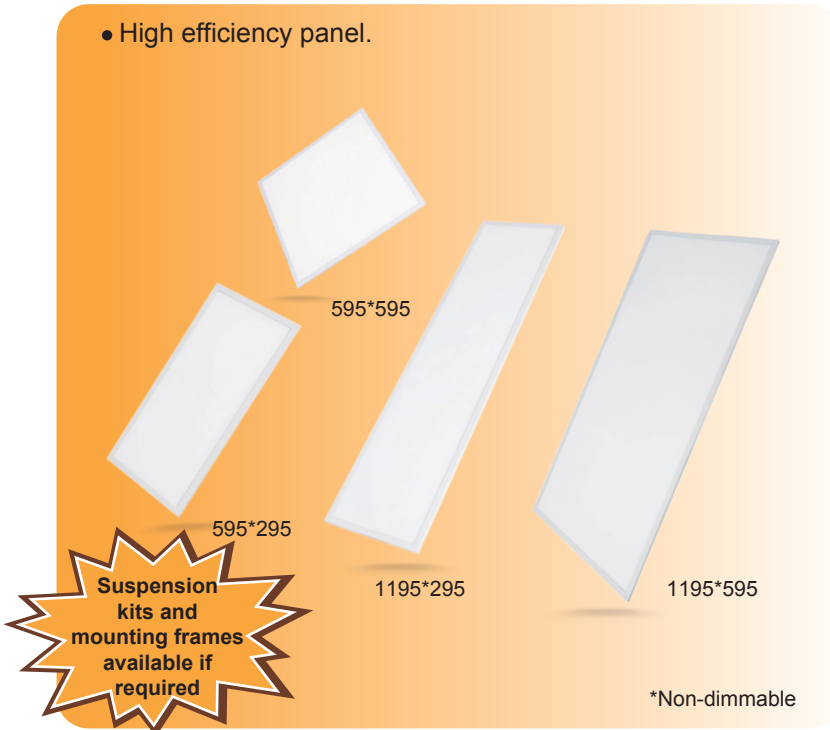

## FEATURES

- Super slim design
- Extruded aluminium frame
- Powder coated finish
- High transparency opal polystyrene backed diffuser
- Side emitting

## INCLUDES

- High efficiency LED panel light
- Constant current LED driver
- 1.2m flex & plug

## INSTALLATION OPTIONS

- Standard metric T-bar ceiling recessed installation
- Suspended (Suspension kit is required)
- Recessed plaster ceiling installation (Plaster frame is required)
- Surface mounting installation (Surfaced mounted frame is required)

## APPLICATIONS

- Offices
- Conference rooms
- Schools
- Retail

## WARRANTY

- Five years (subject to terms and conditions)

| CERTIFICATION | IP RATING | DISTRIBUTION | DIMENSIONS(mm) |
|---------------|-----------|--------------|----------------|
|               |           |              |                |

| Part No. | Voltage  | Watt. | PF  | CCT.  | Ra  | Lumen  | Beam Angle | Lifetime L70B50 | Size(L*W*H)mm |
|----------|----------|-------|-----|-------|-----|--------|------------|-----------------|---------------|
| 222011   | 220-240V | 18W   | 0.9 | 3000K | ≥80 | 1450lm | 110°       | 35000h          | 595*295*9.5   |
| 222012   | 220-240V | 36W   | 0.9 | 3000K | ≥80 | 3100lm | 110°       | 35000h          | 595*595*9.5   |
| 222013   | 220-240V | 36W   | 0.9 | 3000K | ≥80 | 3100lm | 110°       | 35000h          | 1195*295*9.5  |
| 222014   | 220-240V | 56W   | 0.9 | 3000K | ≥80 | 4000lm | 110°       | 35000h          | 1195*595*9.5  |
| 222001   | 220-240V | 18W   | 0.9 | 4000K | ≥80 | 1500lm | 110°       | 35000h          | 595*295*9.5   |
| 222002   | 220-240V | 36W   | 0.9 | 4000K | ≥80 | 3400lm | 110°       | 35000h          | 595*595*9.5   |
| 222003   | 220-240V | 36W   | 0.9 | 4000K | ≥80 | 3400lm | 110°       | 35000h          | 1195*295*9.5  |
| 222004   | 220-240V | 56W   | 0.9 | 4000K | ≥80 | 4500lm | 110°       | 35000h          | 1195*595*9.5  |
| 222007   | 220-240V | 18W   | 0.9 | 5000K | ≥80 | 1500lm | 110°       | 35000h          | 595*295*9.5   |
| 222008   | 220-240V | 36W   | 0.9 | 5000K | ≥80 | 3400lm | 110°       | 35000h          | 595*595*9.5   |
| 222009   | 220-240V | 36W   | 0.9 | 5000K | ≥80 | 3400lm | 110°       | 35000h          | 1195*295*9.5  |
| 222010   | 220-240V | 56W   | 0.9 | 5000K | ≥80 | 4500lm | 110°       | 35000h          | 1195*595*9.5  |

| Part No.             | Model No.      | Driver Model No. | VEET Status             | IPART Status                         |
|----------------------|----------------|------------------|-------------------------|--------------------------------------|
| 222011 222001 222007 | YKPLA1-R60x30  | YKD18CC440       | Approved VEET No.: 4002 | Pending No.: 13542D15-GIGHAGF        |
| 222012 222002 222008 | YKPLA1-R60x60  | YKD36CC900       | Approved VEET No.: 4002 | Approved IPART No.: 13542D15-8FBFBFA |
| 222013 222003 222009 | YKPLA1-R120x30 | YKD36CC900       | Approved VEET No.: 4002 | Approved IPART No.: 13542D15-MBEEFFQ |
| 222014 222004 222010 | YKPLA1-R120x60 | YKD56CC1300      | Approved VEET No.: 4002 | Approved IPART No.: 13542D15-ZDFFIHD |

[1]Operating Frequency=50/60Hz; [2]Switch Times≥20000

Specifications are for reference only and may be changed without prior notification.

