

CE EMC TEST REPORT

REPORT NO. : EH6D2816-01
MODEL NO. : Archer VR2800
RECEIVED DATE : Dec. 28, 2016
FINAL TESTED DATE : Mar. 31, 2017
ISSUED DATE : Apr. 06, 2017

TEST STANDARD : EN 301 489-1 V1.9.2 (2011-09), Class B
EN 301 489-17 V2.2.1 (2012-09)
EN 55022:2010/AC:2011, Class B
EN 55032:2015/AC:2016
EN 55024:2010

APPLICANT : TP-Link Technologies Co., Ltd.
ADDRESS : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central
Science and Technology Park,Shennan Rd, Nanshan,
Shenzhen,China

MANUFACTURER : TP-Link Technologies Co., Ltd.
ADDRESS : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central
Science and Technology Park,Shennan Rd, Nanshan,
Shenzhen,China

ISSUED BY : SPORTON International Inc.
LAB ADDRESS : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- This test report is only applicable to European Community.



Table of Contents

VERIFICATION OF COMPLIANCE	1
1. Summary of Test Results	2
2. General Description of Equipment under Test.....	5
3. Test Configuration of Equipment under Test	6
4. General Information of Test.....	12
5. Test of Conducted Emission	13
6. Test of Radiated Emission.....	26
7. Harmonics Test.....	45
8. Voltage Fluctuations and Flicker Test.....	47
9. General Performance Criteria Description of Immunity Test.....	49
10. Radio Frequency Electromagnetic Field Immunity Test (RS).....	59
11. Electrical Fast Transient/Burst Immunity Test (EFT/BURST)	63
12. Surge Immunity Test	67
13. Conducted Disturbances Induced by Radio-Frequency Field Immunity Test (CS).....	71
14. Power Frequency Magnetic Field Immunity Tests	74
15. Voltage Dips and Voltage Interruptions Immunity Tests	76
16. List of Measuring Equipment Used	79
17. Uncertainty of Test Site	81
Appendix A. TEST PHOTOS	A1 ~ A19
Photographs of EUT V01	

History of This Test Report

REPORT NO.	VERSION	ISSUED DATE	Description
EH6D2816-01	Rev. 01	Apr. 06, 2017	Initial issue of report

VERIFICATION OF COMPLIANCE

EQUIPMENT NAME : AC2800 Wireless MU-MIMO VDSL/ADSL Modem Router
BRAND NAME : TP-Link
MODEL NO. : Archer VR2800

APPLICANT : TP-Link Technologies Co., Ltd.
ADDRESS : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central
Science and Technology Park,Shennan Rd, Nanshan,
Shenzhen,China

FINAL TESTED DATE : Mar. 31, 2017

TEST STANDARD : EN 301 489-1 V1.9.2 (2011-09), Class B
EN 301 489-17 V2.2.1 (2012-09)
EN 55022:2010/AC:2011, Class B
EN 55032:2015/AC:2016
EN 55024:2010

I **HEREBY** DECLARE THAT:

The measurements shown in this test report were made in accordance with the procedures given in
EUROPEAN COUNCIL DIRECTIVE 1999/5/EC.

The above equipment has been tested by **SPORTON International Inc. LAB.**, and found compliance with the
requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT)
configurations represented herein are true and accurate accounts of the measurements of the sample's EMC
characteristics under the conditions specified in this report.


Sin Chang
SPORTON INTERNATIONAL INC.

1. Summary of Test Results

After estimating all the combination of every test mode, the result shown as below is the worst case.

The EUT has been tested according to the following specifications.

Applicable Standard: EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011			
Test Standard	Test Type	Result	Remarks
EN 55022:2010/AC:2011	AC Power Port Conducted emission test 150 kHz – 30 MHz	PASS	Meet minimum passing margin is -9.29dB at 0.1557MHz.
	Telecom Port Conducted emission test 150 kHz – 30 MHz	PASS	Meet minimum passing margin is -5.12dB at 12.9885MHz.
	Radiated emission test 30 MHz – 1,000 MHz @ 10 m 1,000 MHz – 6,000 MHz @ 3 m	PASS	Meet minimum passing margin is -5.08dB at 54.25MHz.
EN 61000-3-2:2014	Harmonic Current emission test	-	Note
EN 61000-3-3:2013	Voltage Fluctuations and Flicker tests	PASS	Meet the requirements.
Applicable Standard: EN 55032:2015/AC:2016			
Test Standard	Test Type	Result	Remarks
EN 55032:2015/AC:2016	AC Power Port Conducted emission test 150 kHz – 30 MHz	PASS	Meet minimum passing margin is -8.70dB at 0.15MHz.
	Telecom Port Conducted emission test 150 kHz – 30 MHz	PASS	Meet minimum passing margin is -15.00dB at 1.2488MHz.
	Radiated emission test 30 MHz – 1,000 MHz @ 10 m 1,000 MHz – 6,000 MHz @ 3 m	PASS	Meet minimum passing margin is -3.43dB at 31.94MHz.

Note: The power consumption of EUT is lower than 75W, so the limit is not specified in EN 61000-3-2:2014.

Applicable Standard: EN 301 489-1 V1.9.2 (2011-09)		
Test Standard	Test Type	Pass Criterion
EN 61000-4-2:2009	Electrostatic discharge immunity test ± 2, 4 kV Contact Discharge ± 2, 4, 8 kV Air Discharge Standard Criterion B	A
EN 61000-4-3:2006/A1:2008/A2:2010	Radiated immunity test Frequency Range : 80 MHz to 1,000 MHz and 1,400 MHz to 2,700 MHz Amplitude modulated : 80 % AM (1 kHz) Electromagnetic field : 3 V/m (unmodulated, r.m.s) Standard Criterion A	A
EN 61000-4-4:2012	Electrical fast transient / burst immunity test AC ports 5/50 ns, ± 1 kV, 5 kHz I/O ports 5/50 ns, ± 0.5 kV, 5 kHz Standard Criterion B	A
EN 61000-4-5:2014	Surge immunity test AC ports (1.2/50 us) : line to line : ± 0.5, 1 kV Telecommunication/Signal ports : indoor (1.2/50 us) : ± 0.5 kV outdoor (1.2/50 us) : ± 0.5, 1 kV Standard Criterion B	A
EN 61000-4-6:2014/AC:2015	Conducted immunity test Frequency Range : 150 kHz to 80 MHz Amplitude modulated : 80 % AM (1 kHz) Electromagnetic field : 3 V (unmodulated, r.m.s) Standard Criterion A	A
EN 61000-4-11:2004	Voltage dips, short interruptions and voltage variations immunity tests 1. Dip 0% residual 10 ms (0.5 cycles) – Standard Criterion B	A
	2. Dip 0% residual 20 ms (1.0 cycles) – Standard Criterion B	A
	3. Dip 70% residual 500 ms (25 cycles) – Standard Criterion B	A
	4. Interruption 0% residual 5000 ms (250 cycles) – Standard Criterion C	C

Applicable Standard: EN 55024:2010		
Test Standard	Test Type	Pass Criterion
IEC 61000-4-2:2008	Electrostatic discharge immunity test ± 2, 4 kV Contact Discharge ± 2, 4, 8 kV Air Discharge Standard Criterion B	A
IEC 61000-4-3:2006/A1:2007/A2:2010	Radiated immunity test Frequency Range : 80 MHz to 1,000 MHz Amplitude modulated : 80 % AM (1 kHz) Electromagnetic field : 3 V/m (unmodulated, r.m.s) Standard Criterion A	A
IEC 61000-4-4:2012	Electrical fast transient / burst immunity test AC ports 5/50 ns, ± 1 kV, 5 kHz I/O ports 5/50 ns, ± 0.5 kV, 5 kHz (For xDSL equipment, the repetition frequency is 100 kHz) Standard Criterion B	A
IEC 61000-4-5:2014	Surge immunity test AC ports (1.2/50 us) : line to line : ± 0.5, 1 kV Telecommunication ports : outdoor (10/700 us) : ± 0.5, 1 kV Standard Criterion B	A
IEC 61000-4-6:2013	Conducted immunity test Frequency Range : 150 kHz to 80 MHz Amplitude modulated : 80 % AM (1 kHz) Electromagnetic field : 3 V (unmodulated, r.m.s) Standard Criterion A	A
IEC 61000-4-8:2009	Power frequency magnetic field immunity test 1 A/m, 50 Hz Standard Criterion A	A
IEC 61000-4-11:2004	Voltage dips, short interruptions and voltage variations immunity tests 1. >95% reduction 10 ms (0.5 cycles) – Standard Criterion B	A
	2. 30% reduction 500 ms (25 cycles) – Standard Criterion C	A
	3. Interruption >95% reduction 5,000 ms (250 cycles) – Standard Criterion C	C

2. General Description of Equipment under Test

Product Detail	
Equipment Name	AC2800 Wireless MU-MIMO VDSL/ADSL Modem Router
Model No.	Archer VR2800
Brand Name	TP-Link
Power Supply	From Power Adapter

2.1. Feature of Equipment under Test

1. The EUT supports 2.4GHz / 5GHz wireless function.
2. Accessories

Power	Brand	Model	Rating
Adapter 1 (AU Plug)	TenPao	S048CS1200330	Input: 100-240V~50/60Hz 1.5A Max Output: 12.0V, 3300mA
Adapter 2 (EU Plug)	TenPao	S048CV1200330	Input: 100-240V~50/60Hz 1.5A Max Output: 12.0V, 3300mA
Adapter 3 (UK Plug)	TenPao	S048CB1200330	Input: 100-240V~50/60Hz 1.5A Max Output: 12.0V, 3300mA
Others			
Antenna*4			

Note: The difference among Adapter1, Adapter 2 and Adapter 3 is only different plug, there is only adapter 1 was selected to test and recorded in this report as a result.

3. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3. Test Configuration of Equipment under Test

3.1. Test Mode

The following table is a list of the test modes shown in this test report.

Applicable Standard: EN 301 489-1 V1.9.2 (2011-09), EN 55022:2010/AC:2011 and EN 55024:2010

Conducted Emissions	
Test Mode	Description
1	Normal Link - ADSL (Annex A) Mode

Disturbances at Telecommunication Ports	
Test Mode	Description
1	Normal Link - ADSL (Annex A) Mode - LAN1 Port / LAN-1Gbps
2	Normal Link - ADSL (Annex A) Mode - LAN1 Port / LAN-100Mbps
3	Normal Link - ADSL (Annex A) Mode - LAN1 Port / LAN-10Mbps
4	Normal Link - ADSL (Annex A) Mode - LAN4/WAN Port / LAN-1Gbps
5	Normal Link - ADSL (Annex A) Mode - LAN4/WAN Port / LAN-100Mbps
6	Normal Link - ADSL (Annex A) Mode - LAN4/WAN Port / LAN-10Mbps
7	Normal Link - ADSL (Annex A) Mode - DSL Port
Mode 3, Mode 4 and Mode 7 are worst test result among Mode 1 ~ Mode 7, and the test result of those two modes are selected to record in the test report.	

Radiated Emissions	
Test Mode	Description
1	Normal Link - ADSL (Annex A) Mode - EUT at Z-axis
2	Normal Link - ADSL (Annex A) Mode - EUT at Y-axis
<p>For Radiated Emission test below 1GHz: Mode 1 generated the worst test result, so it was recorded in this report.</p> <p>For Radiated Emission test above 1GHz: Mode 1 generated the worst test result for Radiated emission below 1GHz test, thus the measurement for Radiated emission above 1GHz test will follow this same test configuration.</p>	

Harmonic Current Emissions · Voltage Fluctuations and Flicker · ESD · RS · EFT · Surge · CS · PFMF · DIP tests	
Test Mode	Description
1	Normal Link - ADSL (Annex A) Mode

Applicable Standard: EN 55032:2015/AC:2016

Conducted Emissions	
Test Mode	Description
1	Normal Link - ADSL (Annex A) Mode

Disturbances at Telecommunication Ports	
Test Mode	Description
1	Normal Link - ADSL (Annex A) Mode - LAN1 Port / LAN-1Gbps
2	Normal Link - ADSL (Annex A) Mode - LAN4/WAN Port / LAN-1Gbps
3	Normal Link - ADSL (Annex A) Mode - DSL Port

Radiated Emissions	
The EUT was performed at Z axis and Y axis position for Applicable Standard: EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011, and the worst case was found at Z axis. So the measurement will follow this same test configuration.	
Test Mode	Description
1	Normal Link - ADSL (Annex A) Mode - EUT at Z-axis

Note: All the specification of test configurations and test modes were based on customer's request.

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For Conduction Emissions test:

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
ADSL 2 + Simulator	ZYXEL	IES-1000	DoC
Flash disk3.0*2	Transcend	639205 7755	DoC

For Radiated Emissions test:

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
ADSL 2 + Simulator	ZYXEL	IES-1000	DoC
HDD3.0*2	WD	WDBACY5000AWT	DoC

For EMS test:

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
ADSL 2 + Simulator	ZYXEL	IES-1000	DoC
Flash disk3.0*2	Transcend	639205 7755	DoC

3.3. EUT Operation Condition

<EMI>

For Conducted Emissions and Radiated Emissions Test:

During the test, the following programs under WIN 7 were executed:

The remote notebook executed "ping.exe" to link with the EUT to maintain the connection by LAN, WLAN and LAN/WAN.

The remote notebook executed "winthrax" to link with the EUT to perform the read-write function.

The ADSL 2+ Simulator links with the EUT by RJ-11 cable.

Applicable Standard: EN 301 489-1 V1.9.2 (2011-09), EN 55022:2010/AC:2011 and EN 55024:2010

For Disturbances at Telecommunication Ports:

At the same time, the remote notebook executed "LAN TEST" to link with the EUT to traffic packet data generated software and keep 10% traffic load to link with the remote workstation by LAN and LAN/WAN.

Applicable Standard: EN 55032:2015/AC:2016

For Disturbances at Telecommunication Ports:

The remote notebook executed "LAN TEST" to link with the EUT to traffic packet data generated software and keep maximum traffic load by LAN.

<EMS>

During the test, the following programs under WIN 7 were executed:


The remote notebook executed "ping.exe" to link with the EUT to maintain the connection by LAN, WLAN and LAN/WAN.

The remote notebook executed "USB Test" to link with the EUT to perform the read-write function.

The ADSL 2+ Simulator links with the EUT by RJ-11 cable.

3.4. Connection Diagram of Test System

3.4.1. AC Power Line Conduction Emissions Test Configuration

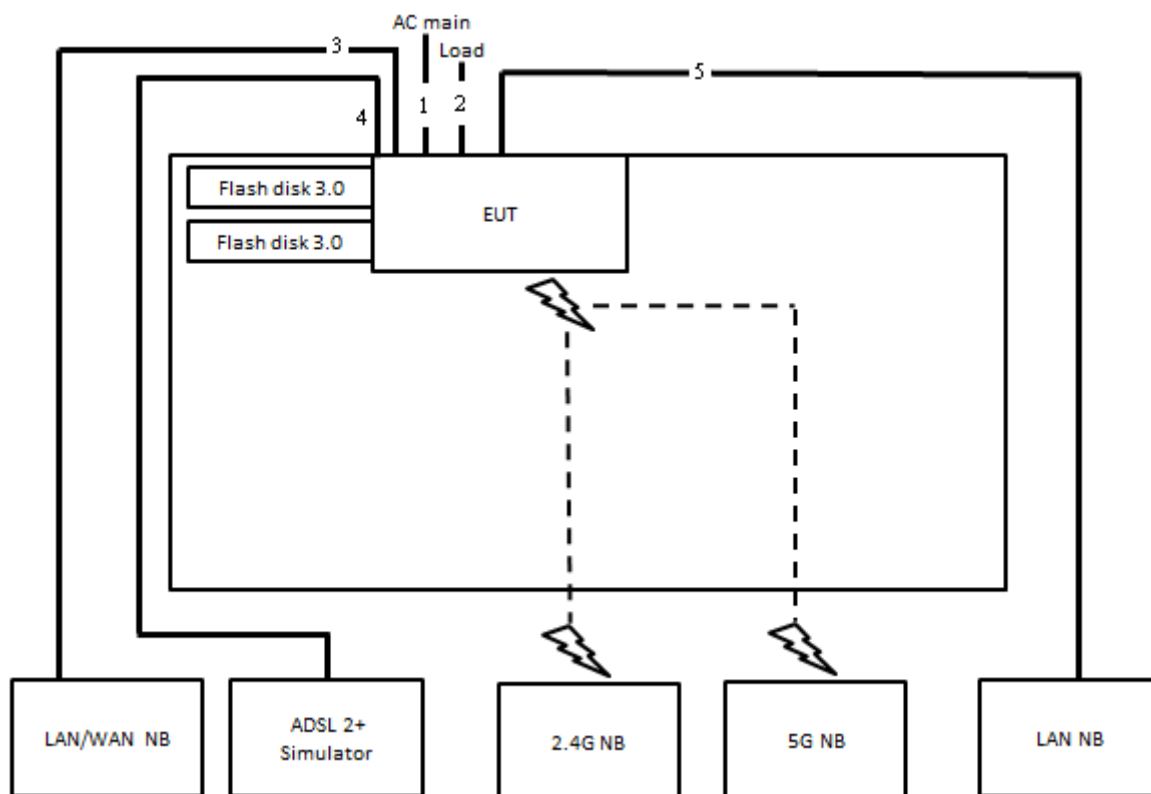

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable*2	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-11 cable	No	10m
5	RJ-45 cable	No	10m

3.4.2. Radiation Emissions Test Configuration



Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable*2	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-11 cable	No	10m
5	USB cable	Yes	0.3m
6	USB cable	Yes	0.3m
7	RJ-45 cable	No	10m

4. General Information of Test

4.1. Test Facility

<EMI>

Test Site Location : No.8, Lane 724, Bo-ai St., Jhubei City,
Hsinchu County 302, Taiwan, R.O.C.
TEL : 886-3-656-9065
FAX : 886-3-656-9085
Test Site No. : Conduction: CO01-CB
Radiation: 10CH01-CB

<EMS>

Test Site Location : No.8, Lane 724, Bo-ai St., Jhubei City,
Hsinchu County 302, Taiwan, R.O.C.
TEL : 886-3-656-9065
FAX : 886-3-656-9085

4.2. Test Voltage

Power Type	Test Voltage
AC Power Supply	230 V / 50 Hz

4.3. Frequency Range Investigated

EMI Test Items	Frequency Range
Conducted emission test	150 kHz to 30 MHz
Radiated emission test	30 MHz to 6,000 MHz
EMS Test Items	Frequency Range
Radio frequency electromagnetic field immunity test	80 MHz to 1,000 MHz, 1,400 MHz to 2,700 MHz
Conducted immunity test	150 kHz to 80 MHz

4.4. Test Distance

Test Items	Test Distance
Radiated emission test below 1 GHz (30 MHz to 1,000 MHz)	10 m
Radiated emission test above 1 GHz (1,000 MHz to 6,000 MHz)	3 m
Radio frequency electromagnetic field immunity test	3 m

5. Test of Conducted Emission

5.1. Limit

5.1.1. Limit for AC power ports :

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

5.1.2. Limit for Telecommunication ports :

Frequency (MHz)	Voltage Limit (dBuV)		Current Limit (dBuA)	
	QP	AV	QP	AV
0.15~0.5	84~74	74~64	40~30	30~20
0.5~30	74	64	30	20

5.2. Description of Major Test Instruments


Test Receiver	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

5.3. Test Procedures

- The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- Connect Telecommunication port to ISN (Impedance Stabilization Network).
- All the support units are connect to the other LISN.
- The LISN provides 50 Ω coupling impedance for the measuring instrument.
- The CISPR states that a 50 Ω , 50 μ H LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.


5.4. Typical Test Setup Layout of Conducted Emission and disturbances at telecommunication ports

Applicable Standard: EN 301 489-1 V1.9.2 (2011-09), and EN 55022:2010/AC:2011

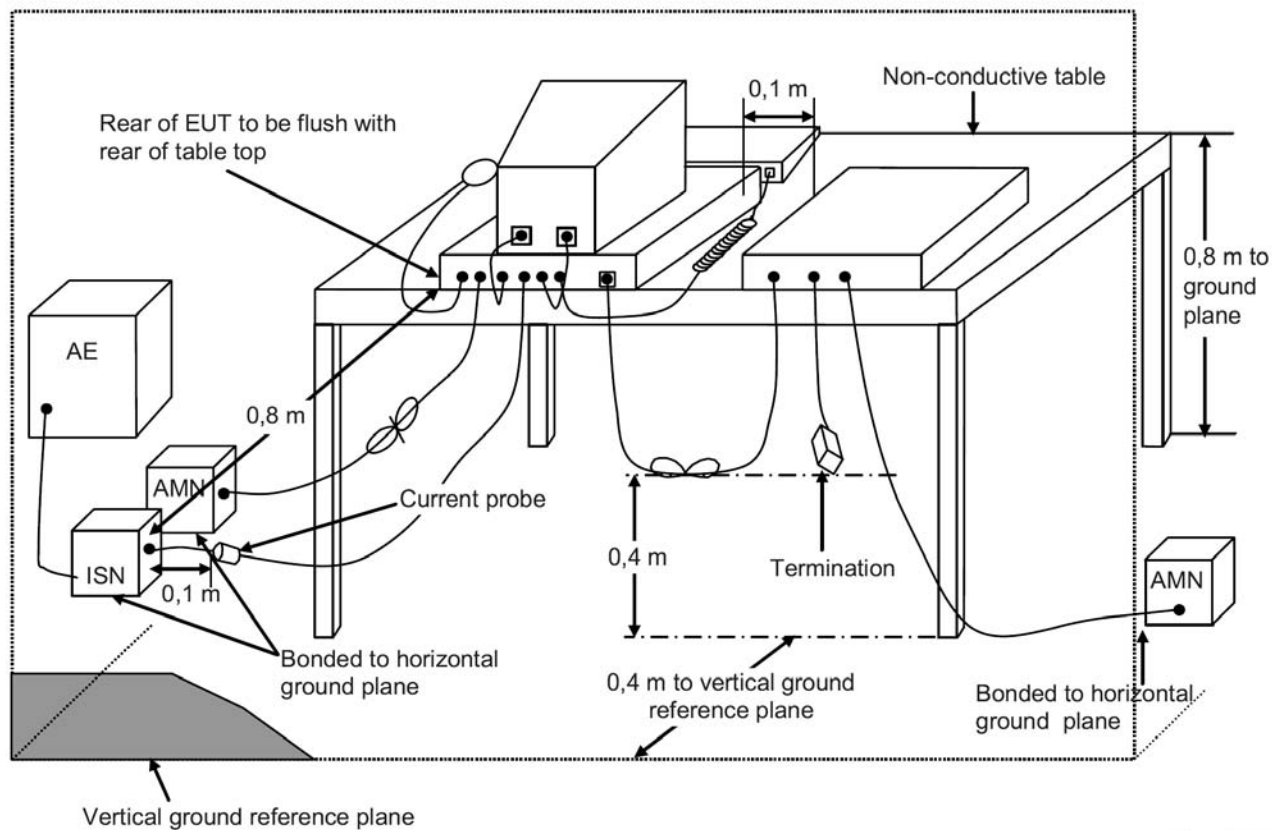

IEC 1344/08


Applicable Standard: EN 55032:2015/AC:2016

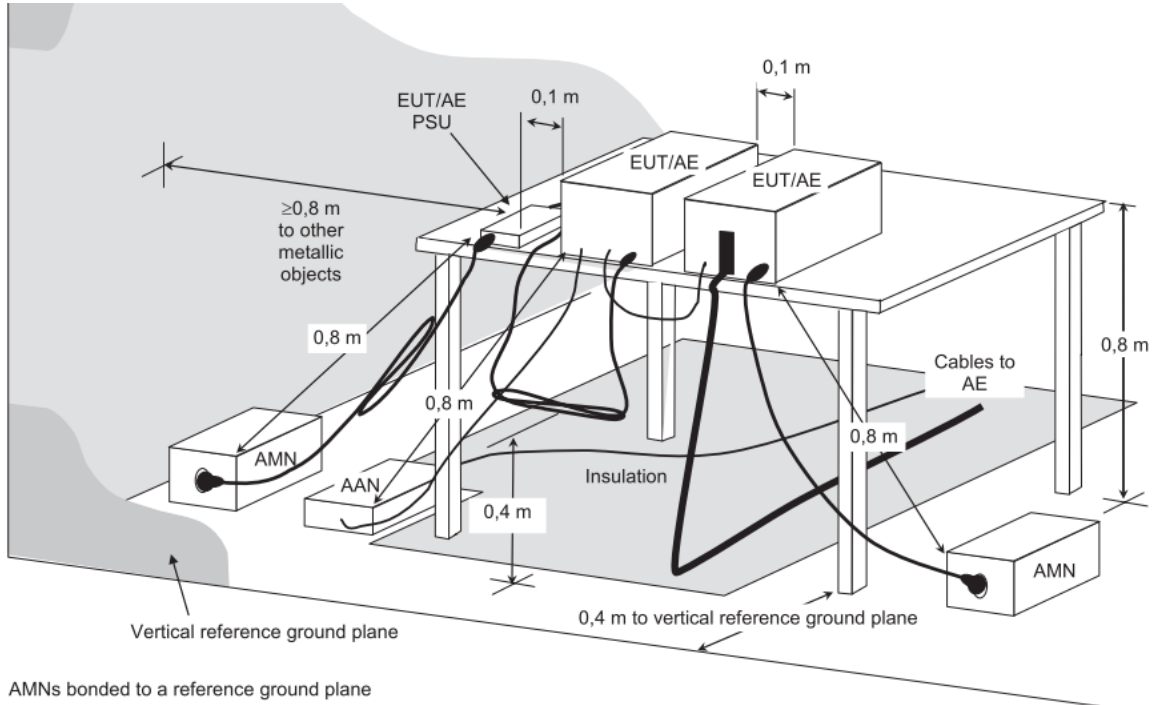

5.5. Test Result of AC Power Ports


Applicable Standard:	EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011		
Temperature	21°C	Humidity	59%
Test Engineer	Edison Lin	Frequency Range	0.15 MHz to 30 MHz
Test Mode	Mode 1		
<div>▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level</div> <div>▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss)</div> <div>▪ All emissions not reported here are more than 10 dB below the prescribed limit.</div> <div>▪ The test was passed at the minimum margin that marked by a frame in the following table</div>			

Line

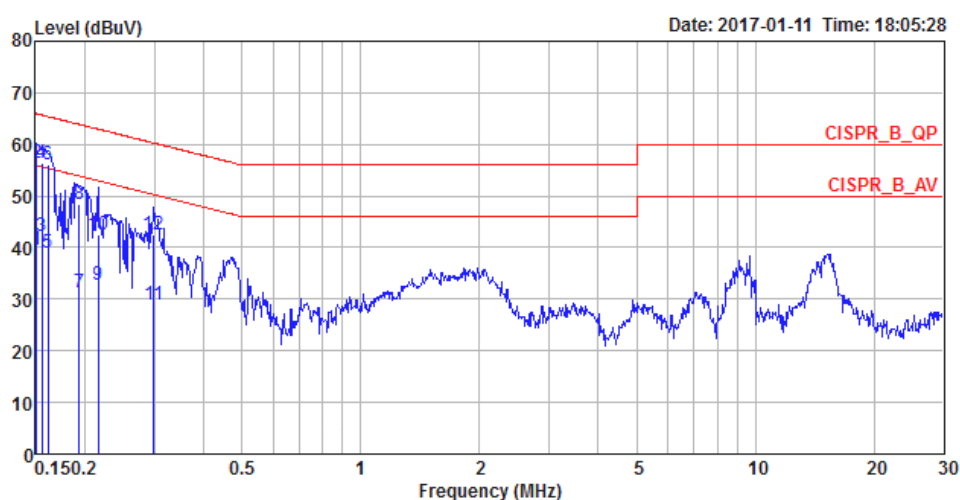

	Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.1508	39.57	-16.39	55.96	29.39	10.02	0.16	LINE	Average
2	0.1508	56.52	-9.44	65.96	46.34	10.02	0.16	LINE	QP
3	0.1557	42.14	-13.55	55.69	31.96	10.02	0.16	LINE	Average
4	0.1557	56.40	-9.29	65.69	46.22	10.02	0.16	LINE	QP
5	0.1616	39.08	-16.30	55.38	28.89	10.02	0.17	LINE	Average
6	0.1616	56.05	-9.33	65.38	45.86	10.02	0.17	LINE	QP
7	0.1934	31.42	-22.47	53.89	21.31	9.92	0.19	LINE	Average
8	0.1934	48.45	-15.44	63.89	38.34	9.92	0.19	LINE	QP
9	0.2162	32.74	-20.22	52.96	22.65	9.92	0.17	LINE	Average
10	0.2162	42.55	-20.41	62.96	32.46	9.92	0.17	LINE	QP
11	0.2987	29.08	-21.20	50.28	19.07	9.92	0.09	LINE	Average
12	0.2987	42.51	-17.77	60.28	32.50	9.92	0.09	LINE	QP


Neutral

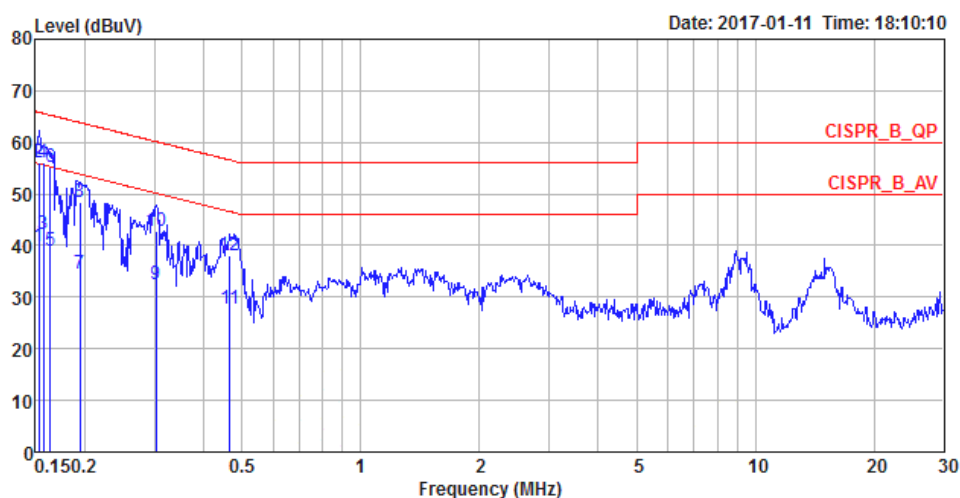

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1532	39.89	-15.93	55.82	29.71	10.02	0.16	NEUTRAL	Average
2	0.1532	56.04	-9.78	65.82	45.86	10.02	0.16	NEUTRAL	QP
3	0.1573	42.07	-13.53	55.60	31.88	10.02	0.17	NEUTRAL	Average
4	0.1573	56.19	-9.41	65.60	46.00	10.02	0.17	NEUTRAL	QP
5	0.1633	38.82	-16.48	55.30	28.63	10.02	0.17	NEUTRAL	Average
6	0.1633	55.06	-10.24	65.30	44.87	10.02	0.17	NEUTRAL	QP
7	0.1945	34.67	-19.17	53.84	24.56	9.92	0.19	NEUTRAL	Average
8	0.1945	48.27	-15.57	63.84	38.16	9.92	0.19	NEUTRAL	QP
9	0.3035	32.44	-17.71	50.15	22.44	9.92	0.08	NEUTRAL	Average
10	0.3035	42.92	-17.23	60.15	32.92	9.92	0.08	NEUTRAL	QP
11	0.4661	27.77	-18.81	46.58	17.72	9.92	0.13	NEUTRAL	Average
12	0.4661	38.05	-18.53	56.58	28.00	9.92	0.13	NEUTRAL	QP


Applicable Standard:	EN 55032:2015/AC:2016		
Temperature	21°C	Humidity	59%
Test Engineer	Edison Lin	Frequency Range	0.15 MHz to 30 MHz
Test Mode	Mode 1		
<div><ul style="list-style-type: none">▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss)▪ All emissions not reported here are more than 10 dB below the prescribed limit.▪ The test was passed at the minimum margin that marked by a frame in the following table</div>			

Line

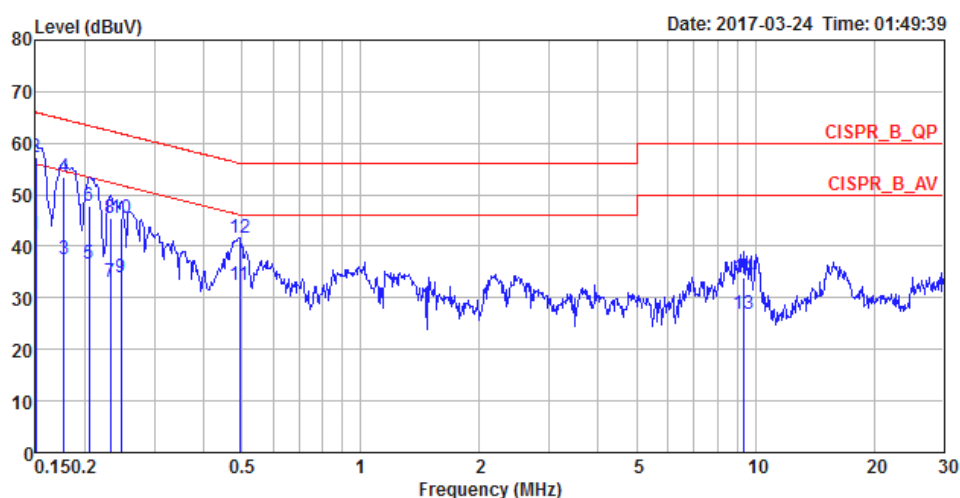

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark	Pol/Phase
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.1500	42.36	-13.64	56.00	32.20	10.00	0.16	Average	LINE
2	0.1500	57.30	-8.70	66.00	47.14	10.00	0.16	QP	LINE
3	0.1768	37.60	-17.04	54.64	27.51	9.91	0.18	Average	LINE
4	0.1768	53.33	-11.31	64.64	43.24	9.91	0.18	QP	LINE
5	0.2050	36.69	-16.71	53.40	26.59	9.92	0.18	Average	LINE
6	0.2050	47.68	-15.72	63.40	37.58	9.92	0.18	QP	LINE
7	0.2316	33.21	-19.18	52.39	23.14	9.92	0.15	Average	LINE
8	0.2316	45.37	-17.02	62.39	35.30	9.92	0.15	QP	LINE
9	0.2468	34.08	-17.78	51.86	24.02	9.92	0.14	Average	LINE
10	0.2468	45.58	-16.28	61.86	35.52	9.92	0.14	QP	LINE
11	0.4941	32.52	-13.58	46.10	22.39	9.95	0.18	Average	LINE
12	0.4941	41.50	-14.60	56.10	31.37	9.95	0.18	QP	LINE
13	9.3518	26.98	-23.02	50.00	16.72	10.11	0.15	Average	LINE
14	9.3518	34.00	-26.00	60.00	23.74	10.11	0.15	QP	LINE


Neutral

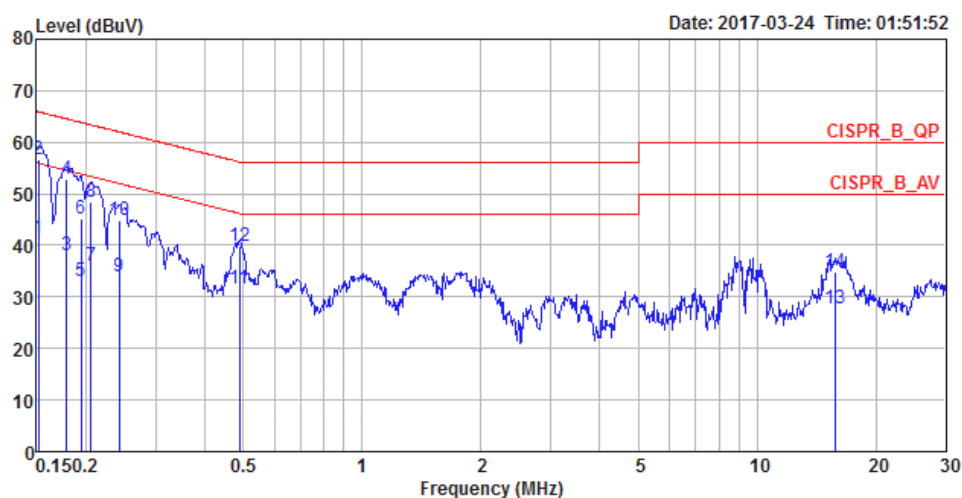

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1516	41.23	-14.68	55.91	30.97	10.10	0.16	Average	NEUTRAL
2	0.1516	56.64	-9.27	65.91	46.38	10.10	0.16	QP	NEUTRAL
3	0.1787	38.11	-16.44	54.55	27.92	10.01	0.18	Average	NEUTRAL
4	0.1787	52.74	-11.81	64.55	42.55	10.01	0.18	QP	NEUTRAL
5	0.1945	33.04	-20.80	53.84	22.84	10.01	0.19	Average	NEUTRAL
6	0.1945	45.03	-18.81	63.84	34.83	10.01	0.19	QP	NEUTRAL
7	0.2061	35.92	-17.44	53.36	25.69	10.05	0.18	Average	NEUTRAL
8	0.2061	48.27	-15.09	63.36	38.04	10.05	0.18	QP	NEUTRAL
9	0.2429	33.83	-18.17	52.00	23.61	10.08	0.14	Average	NEUTRAL
10	0.2429	44.99	-17.01	62.00	34.77	10.08	0.14	QP	NEUTRAL
11	0.4889	31.69	-14.50	46.19	21.29	10.23	0.17	Average	NEUTRAL
12	0.4889	39.95	-16.24	56.19	29.55	10.23	0.17	QP	NEUTRAL
13	15.7179	27.83	-22.17	50.00	17.33	10.28	0.22	Average	NEUTRAL
14	15.7179	34.97	-25.03	60.00	24.47	10.28	0.22	QP	NEUTRAL


5.6. Test Result of Telecommunication Ports

Applicable Standard:	EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	0.15 MHz to 30 MHz
Test Mode	Mode 3: Normal Link - ADSL (Annex A) Mode - LAN1 Port / LAN-10Mbps		
<div>▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level</div> <div>▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss)</div> <div>▪ All emissions not reported here are more than 10 dB below the prescribed limit.</div> <div>▪ The test was passed at the minimum margin that marked by a frame in the following table</div>			

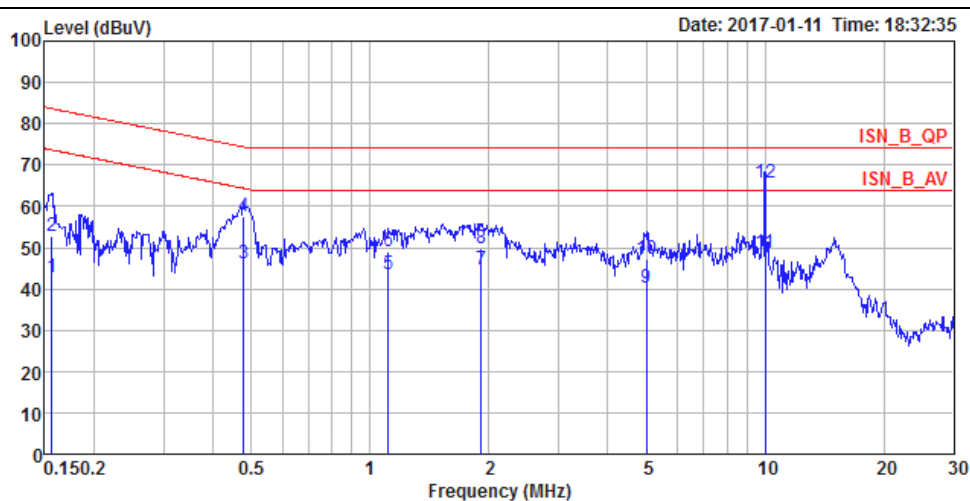


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1565	42.84	-30.81	73.65	32.60	10.07	0.17		Average
2	0.1565	52.91	-30.74	83.65	42.67	10.07	0.17		QP
3	0.4786	46.05	-18.31	64.36	36.20	9.70	0.15		Average
4	0.4786	57.39	-16.97	74.36	47.54	9.70	0.15		QP
5	1.1114	43.49	-20.51	64.00	33.27	9.58	0.64		Average
6	1.1114	49.05	-24.95	74.00	38.83	9.58	0.64		QP
7	1.9080	44.52	-19.48	64.00	34.88	9.53	0.11		Average
8	1.9080	49.64	-24.36	74.00	40.00	9.53	0.11		QP
9	5.0046	40.05	-23.95	64.00	30.47	9.48	0.10		Average
10	5.0046	47.33	-26.67	74.00	37.75	9.48	0.10		QP
11	10.0000	48.88	-15.12	64.00	39.26	9.47	0.15		Average
12	10.0000	65.61	-8.39	74.00	55.99	9.47	0.15		QP

Applicable Standard:	EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	0.15 MHz to 30 MHz
Test Mode	Mode 4: Normal Link - ADSL (Annex A) Mode - LAN4/WAN Port / LAN-1Gbps		
<ul style="list-style-type: none">▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss)▪ All emissions not reported here are more than 10 dB below the prescribed limit.▪ The test was passed at the minimum margin that marked by a frame in the following table			

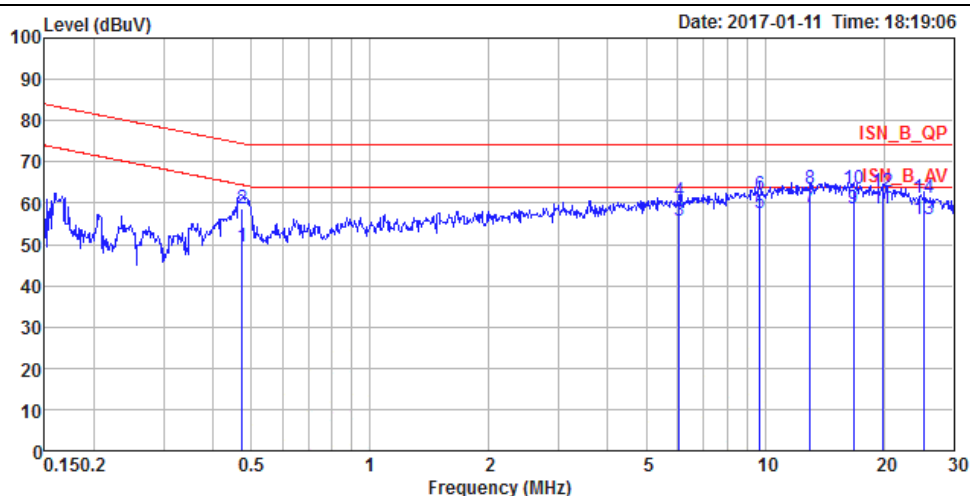


	Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.4736	49.28	-15.17	64.45	39.43	9.70	0.15		Average
2	0.4736	58.62	-15.83	74.45	48.77	9.70	0.15		QP
3	6.0563	55.80	-8.20	64.00	46.20	9.48	0.12		Average
4	6.0563	60.39	-13.61	74.00	50.79	9.48	0.12		QP
5	9.7051	57.53	-6.47	64.00	47.91	9.47	0.15		Average
6	9.7051	62.15	-11.85	74.00	52.53	9.47	0.15		QP
7	12.9885	58.88	-5.12	64.00	49.13	9.56	0.19		Average
8	12.9885	63.32	-10.68	74.00	53.57	9.56	0.19		QP
9	16.7497	58.59	-5.41	64.00	48.72	9.64	0.23		Average
10	16.7497	63.43	-10.57	74.00	53.56	9.64	0.23		QP
11	19.8445	58.54	-5.46	64.00	48.60	9.70	0.24		Average
12	19.8445	62.81	-11.19	74.00	52.87	9.70	0.24		QP
13	25.3214	56.23	-7.77	64.00	46.03	9.93	0.27		Average
14	25.3214	61.17	-12.83	74.00	50.97	9.93	0.27		QP

Applicable Standard:	EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	0.15 MHz to 30 MHz
Test Mode	Mode 7: Normal Link - ADSL (Annex A) Mode - DSL Port		
<div>▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level</div> <div>▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss)</div> <div>▪ All emissions not reported here are more than 10 dB below the prescribed limit.</div> <div>▪ The test was passed at the minimum margin that marked by a frame in the following table</div>			

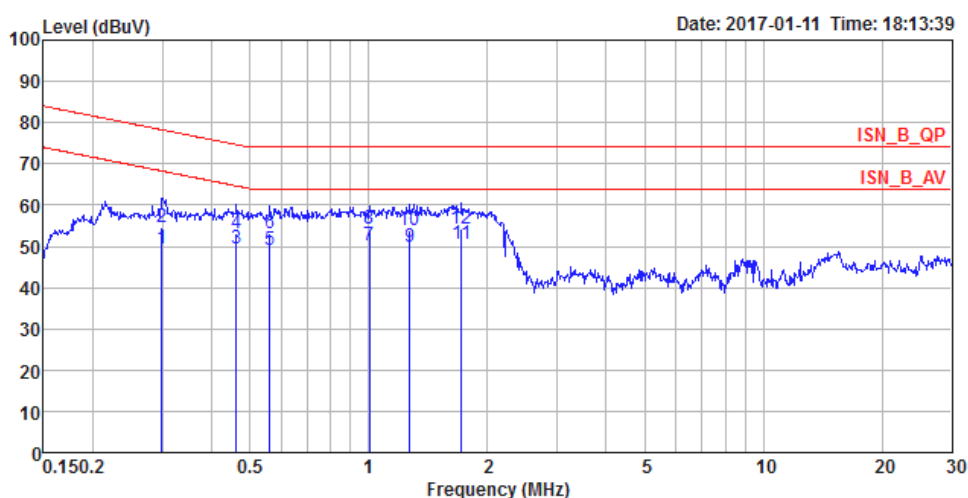


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.2987	49.58	-18.70	68.28	39.89	9.60	0.09		Average
2	0.2987	54.49	-23.79	78.28	44.80	9.60	0.09		QP
3	0.4612	49.46	-15.21	64.67	39.84	9.50	0.12		Average
4	0.4612	53.22	-21.45	74.67	43.60	9.50	0.12		QP
5	0.5611	49.17	-14.83	64.00	39.44	9.46	0.27		Average
6	0.5611	53.11	-20.89	74.00	43.38	9.46	0.27		QP
7	1.0050	50.29	-13.71	64.00	40.16	9.39	0.74		Average
8	1.0050	54.23	-19.77	74.00	44.10	9.39	0.74		QP
9	1.2688	49.88	-14.12	64.00	40.00	9.37	0.51		Average
10	1.2688	53.84	-20.16	74.00	43.96	9.37	0.51		QP
11	1.7162	50.52	-13.48	64.00	40.97	9.34	0.21		Average
12	1.7162	54.18	-19.82	74.00	44.63	9.34	0.21		QP

Applicable Standard:	EN 55032:2015/AC:2016		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	0.15 MHz to 30 MHz
Test Mode	Mode 1: Normal Link - ADSL (Annex A) Mode - LAN1 Port / LAN-1Gbps		
<div>▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level</div> <div>▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss)</div> <div>▪ All emissions not reported here are more than 10 dB below the prescribed limit.</div> <div>▪ The test was passed at the minimum margin that marked by a frame in the following table</div>			

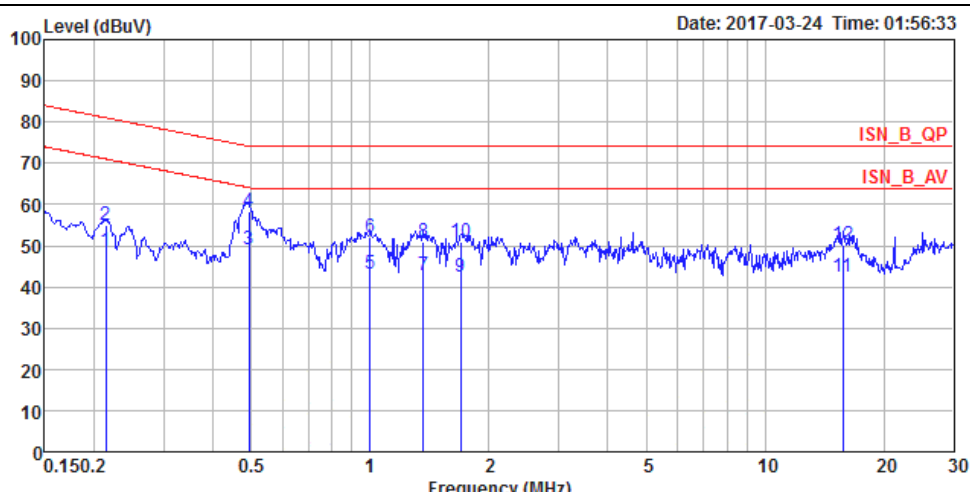


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.2139	48.53	-22.52	71.05	38.45	9.91	0.17	Average	
2	0.2139	55.07	-25.98	81.05	44.99	9.91	0.17	QP	
3	0.4941	48.91	-15.19	64.10	39.04	9.69	0.18	Average	
4	0.4941	58.35	-15.75	74.10	48.48	9.69	0.18	QP	
5	0.9997	43.01	-20.99	64.00	32.68	9.59	0.74	Average	
6	0.9997	51.89	-22.11	74.00	41.56	9.59	0.74	QP	
7	1.3665	42.86	-21.14	64.00	32.86	9.56	0.44	Average	
8	1.3665	50.92	-23.08	74.00	40.92	9.56	0.44	QP	
9	1.6981	42.54	-21.46	64.00	32.78	9.54	0.22	Average	
10	1.6981	50.88	-23.12	74.00	41.12	9.54	0.22	QP	
11	15.7179	42.59	-21.41	64.00	32.75	9.62	0.22	Average	
12	15.7179	50.22	-23.78	74.00	40.38	9.62	0.22	QP	

Applicable Standard:	EN 55032:2015/AC:2016		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	0.15 MHz to 30 MHz
Test Mode	Mode 2: Normal Link - ADSL (Annex A) Mode - LAN4/WAN Port / LAN-1Gbps		
<ul style="list-style-type: none">• Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level• Margin = - Limit + (Read Level + LISN Factor + Cable Loss)• All emissions not reported here are more than 10 dB below the prescribed limit.• The test was passed at the minimum margin that marked by a frame in the following table			

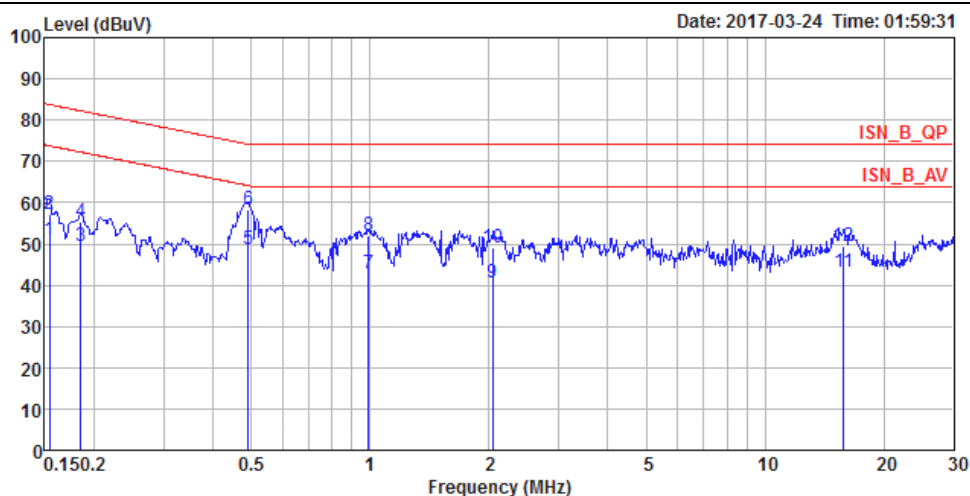

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark	Pol/Phase
			dB	dBuV	dBuV	dB	dB		
1	0.1540	50.94	-22.84	73.78	40.70	10.08	0.16	Average	
2	0.1540	57.15	-26.63	83.78	46.91	10.08	0.16	QP	
3	0.1854	49.27	-22.97	72.24	39.12	9.97	0.18	Average	
4	0.1854	55.34	-26.90	82.24	45.19	9.97	0.18	QP	
5	0.4915	48.62	-15.52	64.14	38.76	9.69	0.17	Average	
6	0.4915	58.27	-15.87	74.14	48.41	9.69	0.17	QP	
7	0.9891	42.92	-21.08	64.00	32.60	9.59	0.73	Average	
8	0.9891	51.88	-22.12	74.00	41.56	9.59	0.73	QP	
9	2.0441	40.53	-23.47	64.00	30.94	9.53	0.06	Average	
10	2.0441	48.96	-25.04	74.00	39.37	9.53	0.06	QP	
11	15.8014	43.22	-20.78	64.00	33.38	9.62	0.22	Average	
12	15.8014	49.58	-24.42	74.00	39.74	9.62	0.22	QP	

Applicable Standard:	EN 55032:2015/AC:2016		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	0.15 MHz to 30 MHz
Test Mode	Mode 3: Normal Link - ADSL (Annex A) Mode - DSL Port		
<ul style="list-style-type: none">▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss)▪ All emissions not reported here are more than 10 dB below the prescribed limit.▪ The test was passed at the minimum margin that marked by a frame in the following table			

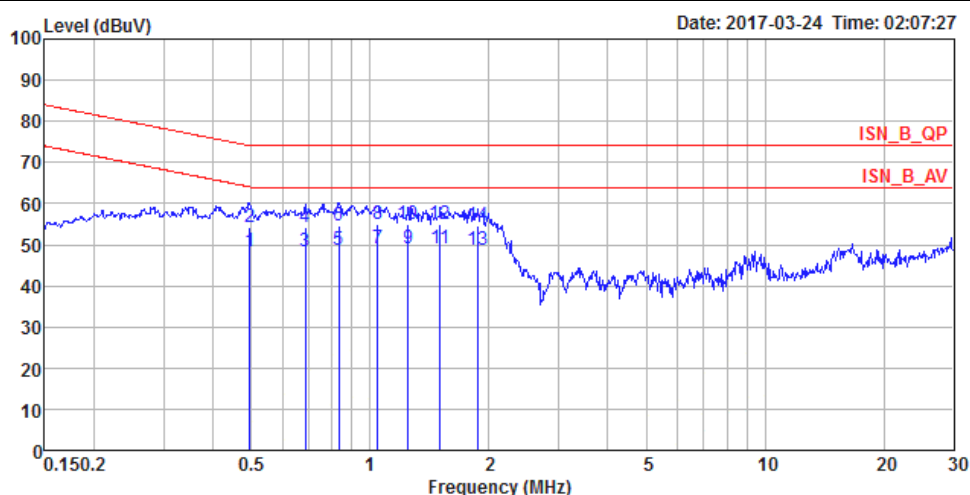

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark	Pol/Phase
			dB	dBuV	dBuV	dB	dB		
1	0.4967	48.30	-15.75	64.05	38.64	9.48	0.18	Average	
2	0.4967	54.37	-19.68	74.05	44.71	9.48	0.18	QP	
3	0.6863	48.35	-15.65	64.00	38.48	9.43	0.44	Average	
4	0.6863	54.39	-19.61	74.00	44.52	9.43	0.44	QP	
5	0.8349	48.58	-15.42	64.00	38.58	9.41	0.59	Average	
6	0.8349	54.50	-19.50	74.00	44.50	9.41	0.59	QP	
7	1.0430	48.92	-15.08	64.00	38.83	9.39	0.70	Average	
8	1.0430	54.96	-19.04	74.00	44.87	9.39	0.70	QP	
9	1.2488	49.00	-15.00	64.00	39.11	9.37	0.52	Average	
10	1.2488	54.99	-19.01	74.00	45.10	9.37	0.52	QP	
11	1.5033	48.90	-15.10	64.00	39.21	9.35	0.34	Average	
12	1.5033	54.89	-19.11	74.00	45.20	9.35	0.34	QP	
13	1.8779	48.55	-15.45	64.00	39.10	9.33	0.12	Average	
14	1.8779	54.63	-19.37	74.00	45.18	9.33	0.12	QP	

6. Test of Radiated Emission

6.1. Limit

Radiated Emission below 1 GHz test at 10 m:

Frequency (MHz)	QP (dBuV/m)
30~230	30
230~1,000	37

Radiated Emission above 1 GHz test at 3 m:

Frequency (MHz)	PK (dBuV/m)	AV (dBuV/m)
1,000~3,000	70	50
3,000~6,000	74	54

6.2. Description of Major Test Instruments

6.2.1. 30 MHz ~ 1,000 MHz

Amplifier	Setting
RF Gain	25 dB
Signal Input	9 kHz to 1.3 GHz

Spectrum Analyzer	Setting
Start Frequency	30 MHz
Stop Frequency	1000 MHz
Resolution Bandwidth	120 kHz
Signal Input	9 kHz to 30 GHz

Test Receiver	Setting
Start Frequency	30 MHz
Stop Frequency	1000 MHz
Resolution Bandwidth	120 kHz
Signal Input	9 kHz to 3 GHz

6.2.2. Above 1 GHz

Amplifier	Setting
RF Gain	35 dB
Signal Input	1 GHz to 26.5 GHz

Spectrum Analyzer	Setting
Start Frequency	1 GHz
Stop Frequency	6 GHz
Resolution Bandwidth	1 MHz
Signal Input	9 kHz to 30 GHz

6.3. Test Procedures

<Below 1 GHz>:


- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

<Above 1 GHz>:


- a. Same test set up as below 1 GHz radiated testing.
- b. The EUT was set 3 meters from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.
- c. There should be absorber placed between the EUT and Antenna and its located size should let the test site meet CISPR16-1-4 requirement.
- d. The table was rotated 360 degrees to determine the position of the highest radiation.
- e. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- f. Set the DRG Horn Antenna at 1M height, then run the turn table to get the maximum noise reading from Horizontal and Vertical polarity separately.
- g. When EUT locating on the turn-table, and its height is over 172 cm (Antenna's 3dB beam width of 6 GHz is 27°), the DRG Horn Antenna must be raised up and descended down, then turning around the turn-table to get the maximum noise reading of the Horizontal and Vertical polarity separately. Note the maximum raise up height is same as the top of EUT.
- h. If emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

6.4. Typical Test Setup Layout of Radiated Emission


Applicable Standard: EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011

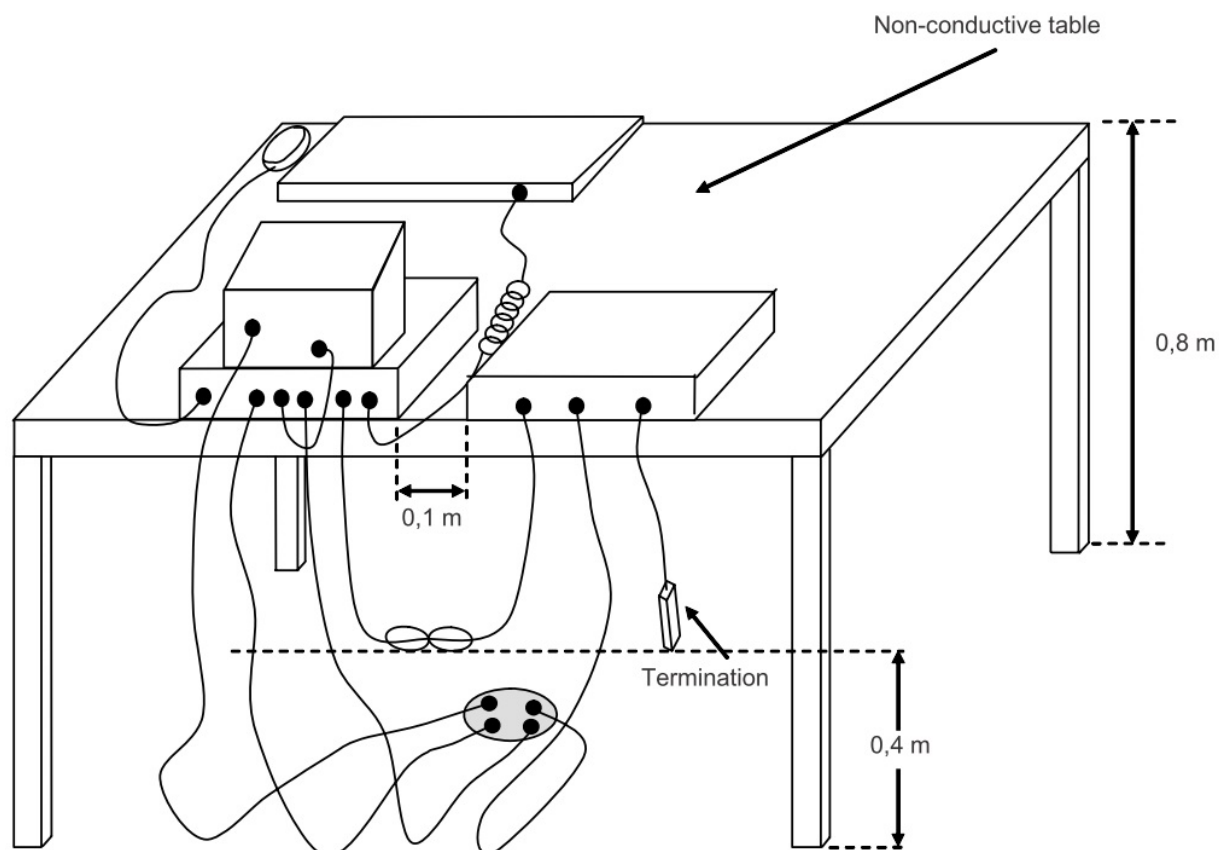


Applicable Standard: EN 55032:2015/AC:2016

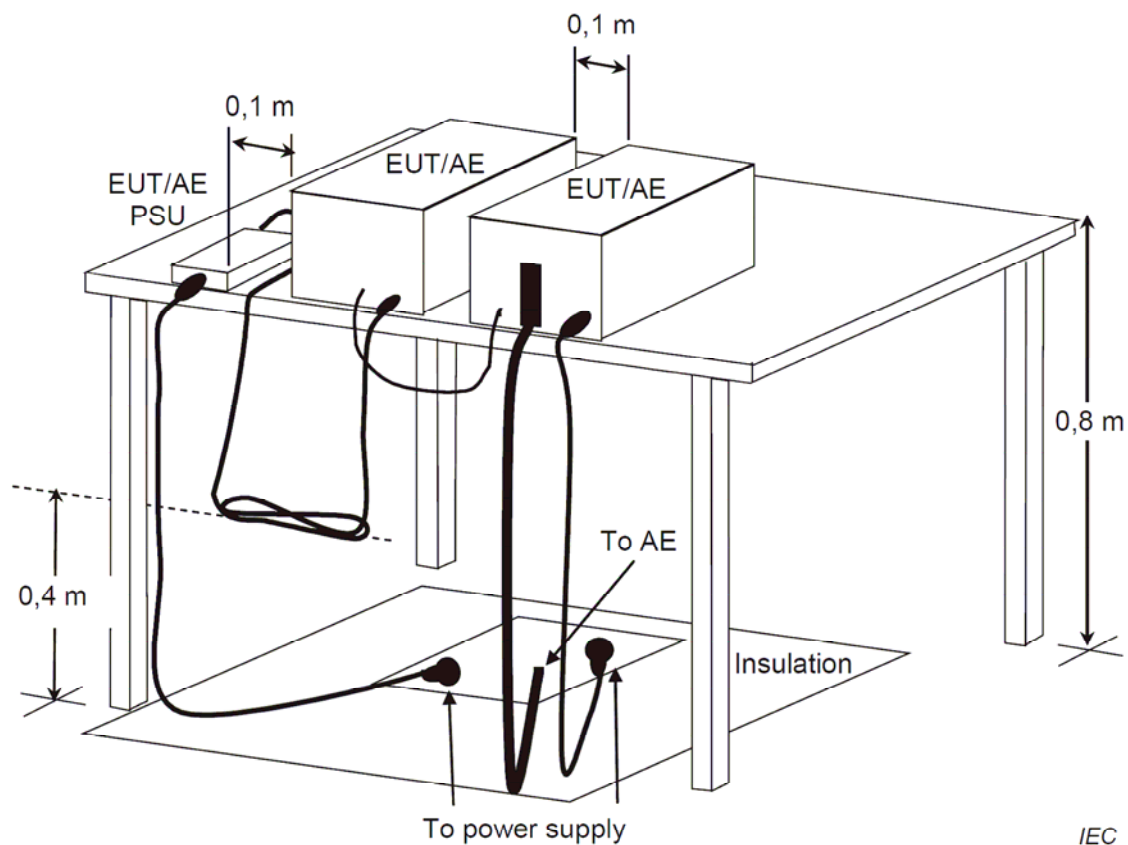

<Below 1 GHz>:

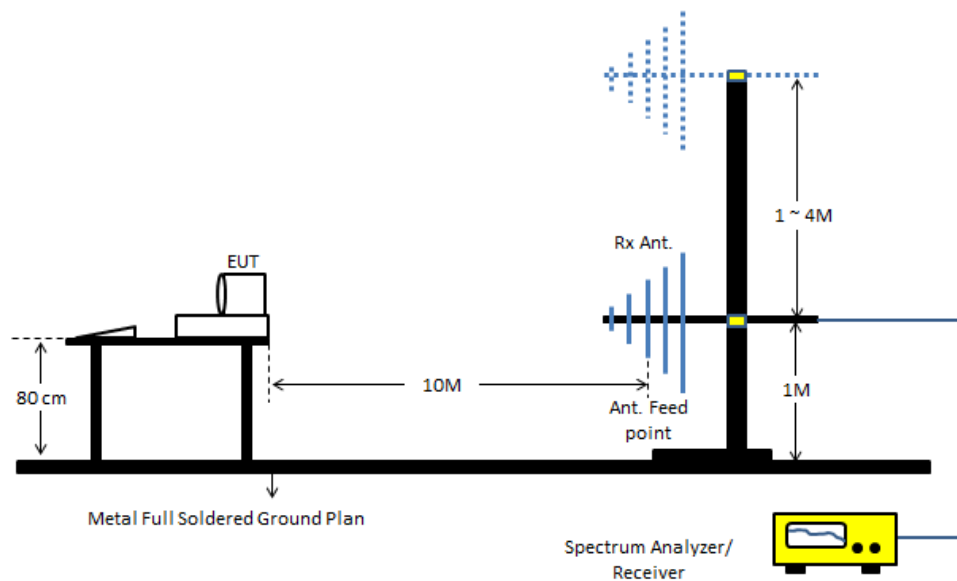

<Above 1 GHz>:

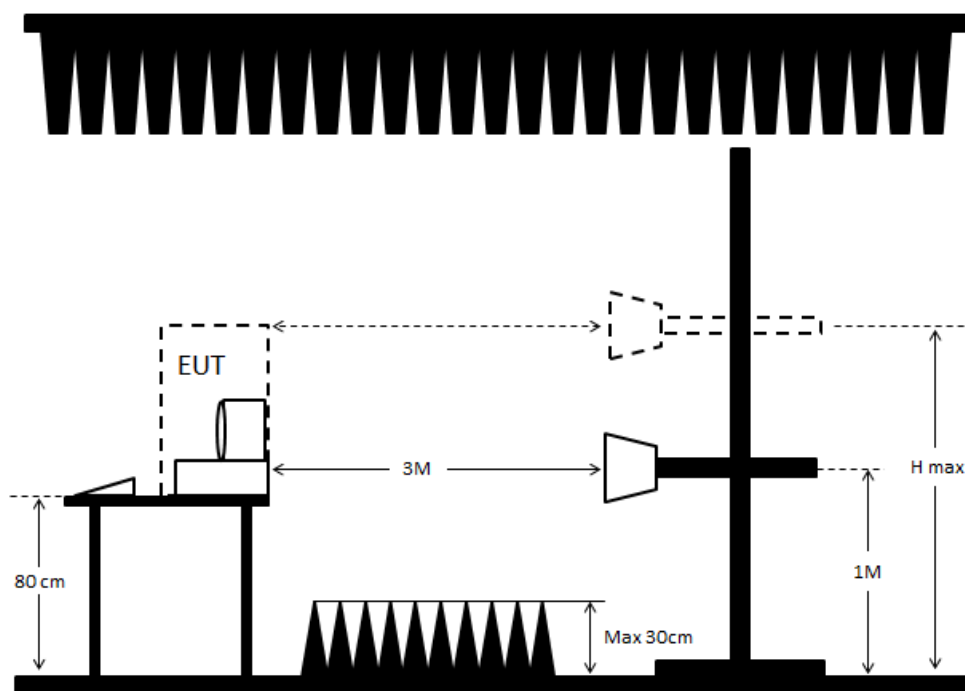


Remark : When EUT height is over 172cm , H max = Top of EUT

6.5. Test Result of Radiated Emission below 1 GHz


Applicable Standard:	EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	30 MHz to 1,000 MHz
Test Mode	Mode 1		
<div>▪ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</div> <div>▪ Margin = - Limit + (Read Level + Antenna Factor + Cable Loss - Preamp Factor)</div> <div>▪ The test was passed at the minimum margin that marked by the frame in the following test record</div>			

Vertical 30 MHz to 200 MHz

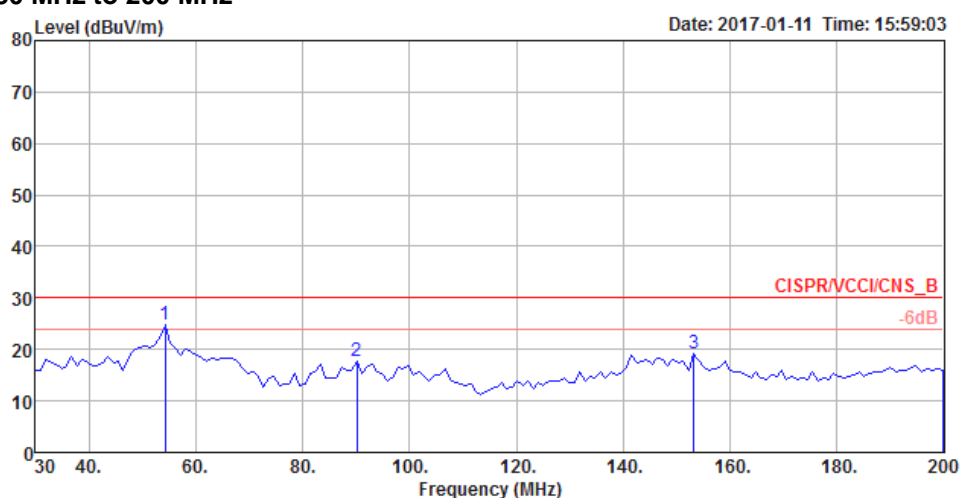


	Freq	Level	Limit	Over	Read	Preamp	Antenna	Cable	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	54.25	24.92	30.00	-5.08	41.31	28.57	10.00	2.18	Peak	300	108	VERTICAL
2	90.14	17.63	30.00	-12.37	34.26	28.49	9.02	2.84	Peak	200	244	VERTICAL
3	153.19	19.11	30.00	-10.89	31.52	28.21	12.10	3.70	Peak	100	231	VERTICAL

Vertical 200 MHz to 1,000 MHz

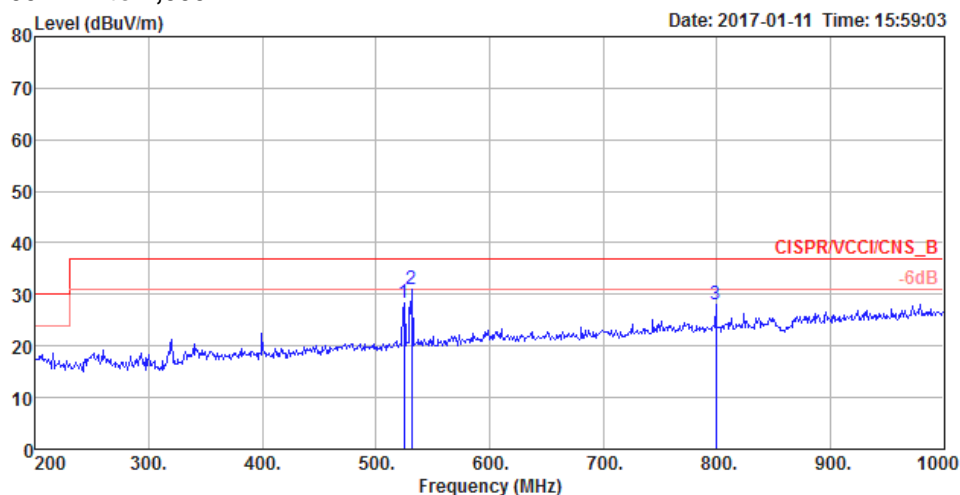


	Freq	Level	Limit	Over	Read	Preamp	Antenna	Cable	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	Level	Factor	Factor	Loss		cm	deg	
1	524.70	28.34	37.00	-8.66	33.38	28.45	17.94	5.47	Peak	400	338	VERTICAL
2	531.49	31.13	37.00	-5.87	36.03	28.45	18.03	5.52	Peak	400	117	VERTICAL
3	799.21	28.01	37.00	-8.99	28.61	27.89	20.70	6.59	Peak	300	346	VERTICAL

Horizontal 30 MHz to 200 MHz

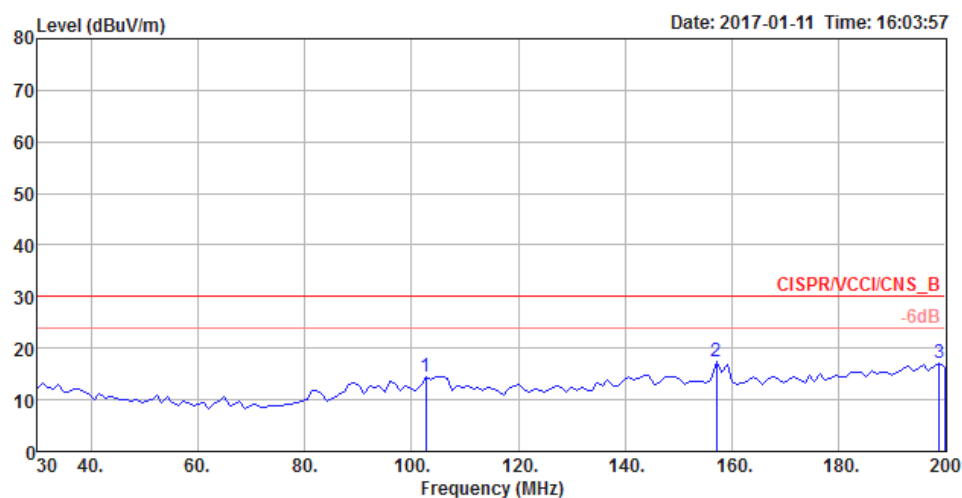

	Freq	Level	Limit	Over	Read	Preamp	Antenna	Cable	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	102.75	14.53	30.00	-15.47	29.93	28.46	10.01	3.05	Peak	400	198	HORIZONTAL
2	157.07	17.38	30.00	-12.62	29.63	28.19	12.21	3.73	Peak	400	142	HORIZONTAL
3	198.78	16.98	30.00	-13.02	26.00	27.98	14.64	4.32	Peak	400	239	HORIZONTAL


Horizontal 200 MHz to 1,000 MHz

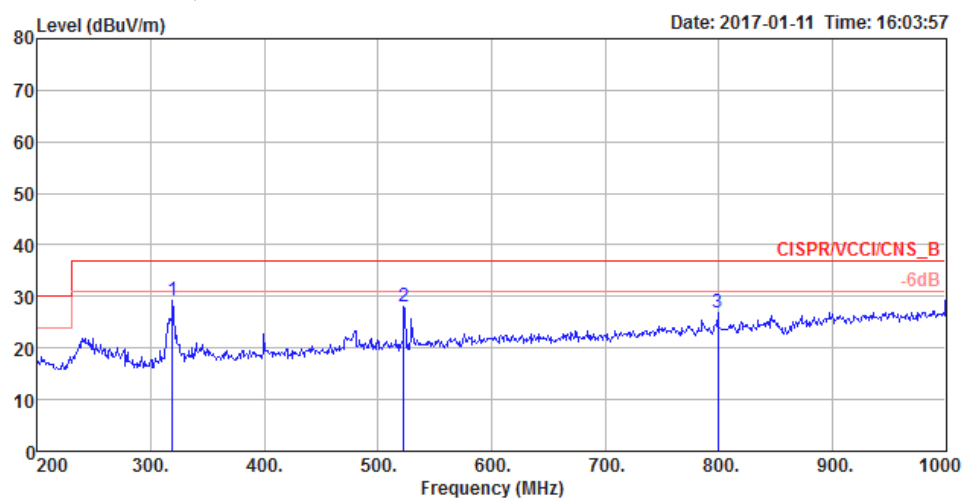

	Freq	Level	Limit	Over	Read	Preamp	Antenna	Cable	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	319.06	29.15	37.00	-7.85	37.84	27.29	14.18	4.42	Peak	300	277	HORIZONTAL
2	522.76	27.99	37.00	-9.01	33.07	28.45	17.91	5.46	Peak	300	222	HORIZONTAL
3	799.21	26.84	37.00	-10.16	27.44	27.89	20.70	6.59	Peak	400	286	HORIZONTAL


Applicable Standard:	EN 55032:2015/AC:2016		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	30 MHz to 1,000 MHz
Test Mode	Mode 1		
<div>▪ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</div> <div>▪ Margin = - Limit + (Read Level + Antenna Factor + Cable Loss - Preamp Factor)</div> <div>▪ The test was passed at the minimum margin that marked by the frame in the following test record</div>			

Vertical 30 MHz to 200 MHz

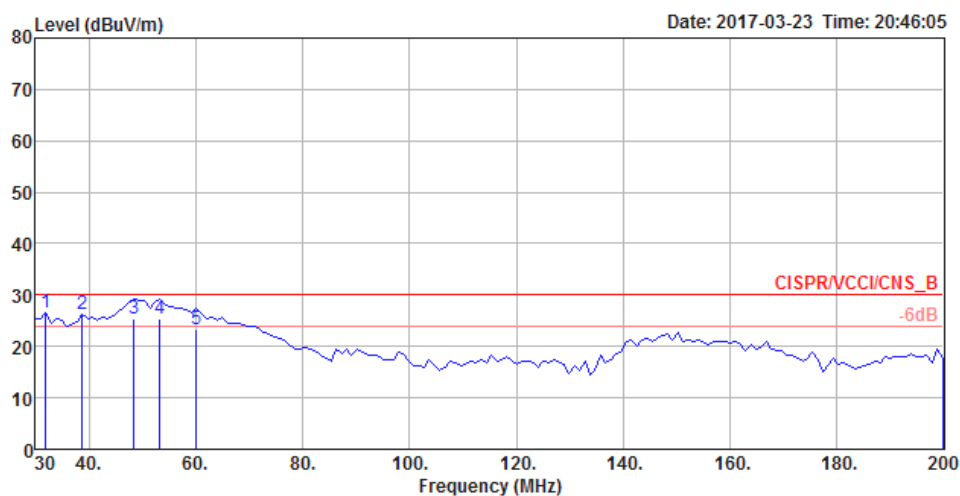


	Freq	Level	Limit	Over	Read	Preamp	Antenna	Cable	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	31.94	26.57	30.00	-3.43	39.66	27.96	13.18	1.69	Peak	100	312	VERTICAL
2	38.73	26.22	30.00	-3.78	40.54	27.95	11.77	1.86	Peak	100	54	VERTICAL
3	48.43	25.35	30.00	-4.65	40.72	27.93	10.50	2.06	QP	100	11	VERTICAL
4	53.28	25.30	30.00	-4.70	40.99	27.92	10.07	2.16	QP	100	24	VERTICAL
5	60.07	23.37	30.00	-6.63	39.37	27.89	9.59	2.30	QP	200	27	VERTICAL

Vertical 200 MHz to 1,000 MHz

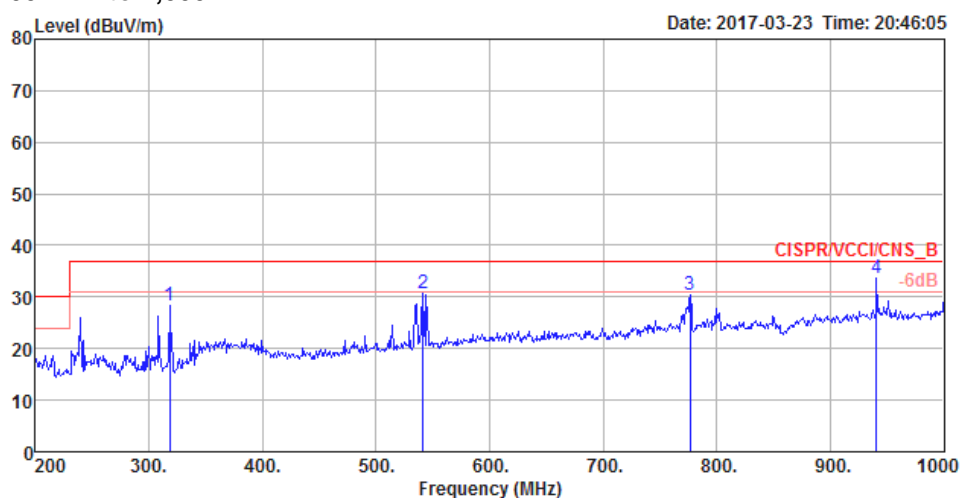


	Freq	Level	Limit	Over	Read	Preamp	Antenna	Cable		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	Level	Factor	Factor	Loss	Remark	cm	deg	Pol/Phase
1	318.09	28.30	37.00	-8.70	37.28	27.53	14.14	4.41	Peak	100	8	VERTICAL
2	541.19	30.80	37.00	-6.20	35.69	28.65	18.17	5.59	Peak	400	167	VERTICAL
3	776.90	30.36	37.00	-6.64	31.52	28.32	20.65	6.51	Peak	400	355	VERTICAL
4	940.83	33.52	37.00	-3.48	31.87	27.63	22.09	7.19	Peak	100	43	VERTICAL

Horizontal 30 MHz to 200 MHz

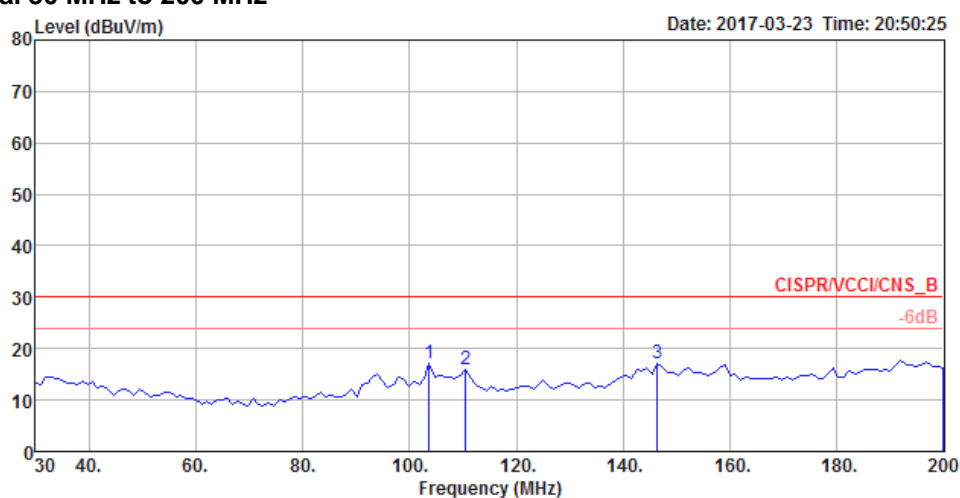

	Freq	Level	Limit	Over	Read	Preamp	Antenna	Cable	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	103.72	17.14	30.00	-12.86	31.78	27.76	10.05	3.07	Peak	400	339	HORIZONTAL
2	110.51	16.04	30.00	-13.96	30.24	27.71	10.34	3.17	Peak	400	172	HORIZONTAL
3	146.40	17.24	30.00	-12.76	29.21	27.54	11.93	3.64	Peak	400	149	HORIZONTAL

Horizontal 200 MHz to 1,000 MHz

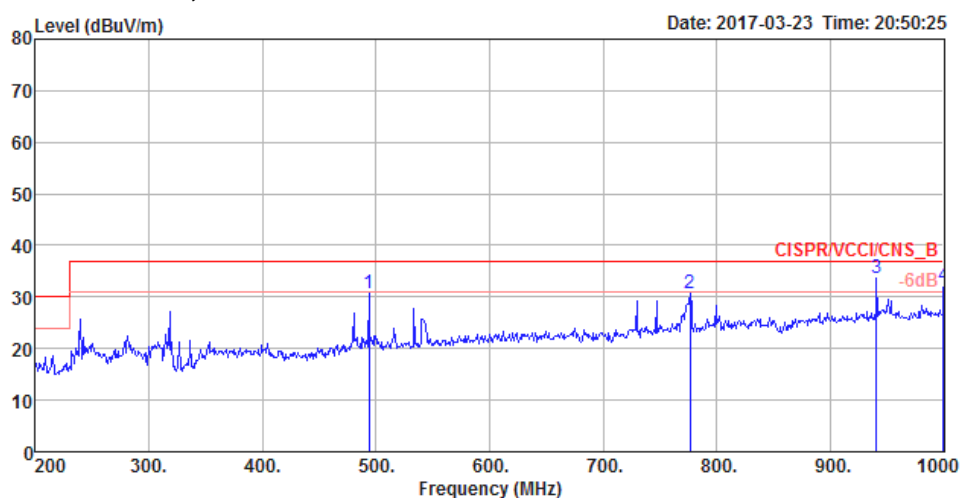


	Freq	Level	Limit Line	Over Limit	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	493.66	30.72	37.00	-6.28	36.56	28.62	17.50	5.28	Peak	100	332	HORIZONTAL
2	776.90	30.64	37.00	-6.36	31.80	28.32	20.65	6.51	Peak	200	169	HORIZONTAL
3	940.83	33.51	37.00	-3.49	31.86	27.63	22.09	7.19	Peak	400	298	HORIZONTAL
4	1000.00	32.16	37.00	-4.84	29.66	27.42	22.70	7.22	Peak	100	134	HORIZONTAL

6.6. Test Result of Radiated Emission above 1 GHz


Applicable Standard:	EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	1,000 MHz to 6,000 MHz
Test Mode	Mode 1		
<div>▪ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</div> <div>▪ Margin = - Limit + (Read Level + Antenna Factor + Cable Loss - Preamp Factor)</div> <div>▪ The test was passed at the minimum margin that marked by the frame in the following test record</div>			

Vertical 1,000 MHz to 6,000 MHz

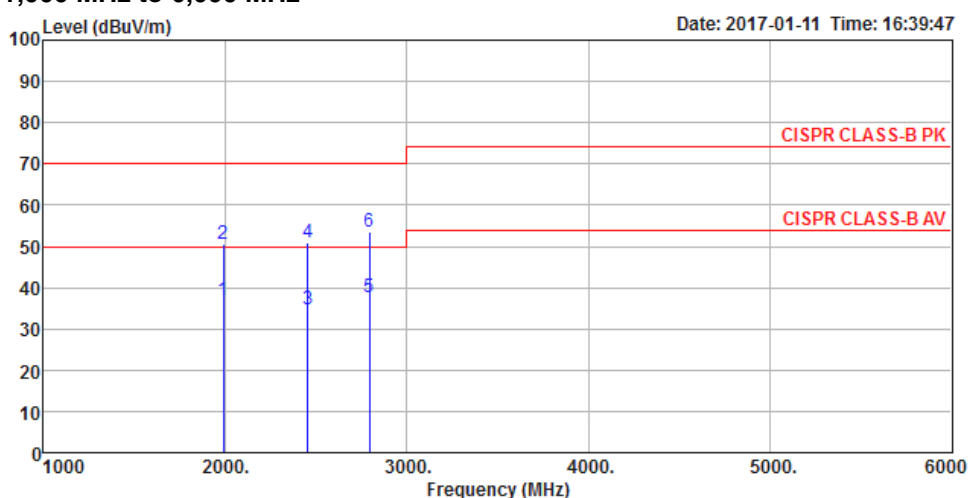

	Freq	Level	Limit Line	Over Limit	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	1990.00	36.96	50.00	-13.04	32.16	35.89	31.09	9.60	Average	100	182	VERTICAL
2	1990.00	50.44	70.00	-19.56	45.64	35.89	31.09	9.60	Peak	100	182	VERTICAL
3	2455.00	34.66	50.00	-15.34	29.02	36.09	32.41	9.32	Average	100	36	VERTICAL
4	2455.00	50.98	70.00	-19.02	45.34	36.09	32.41	9.32	Peak	100	36	VERTICAL
5	2795.00	37.75	50.00	-12.25	31.87	36.25	32.86	9.27	Average	100	269	VERTICAL
6	2795.00	53.52	70.00	-16.48	47.64	36.25	32.86	9.27	Peak	100	269	VERTICAL


Horizontal 1,000 MHz to 6,000 MHz

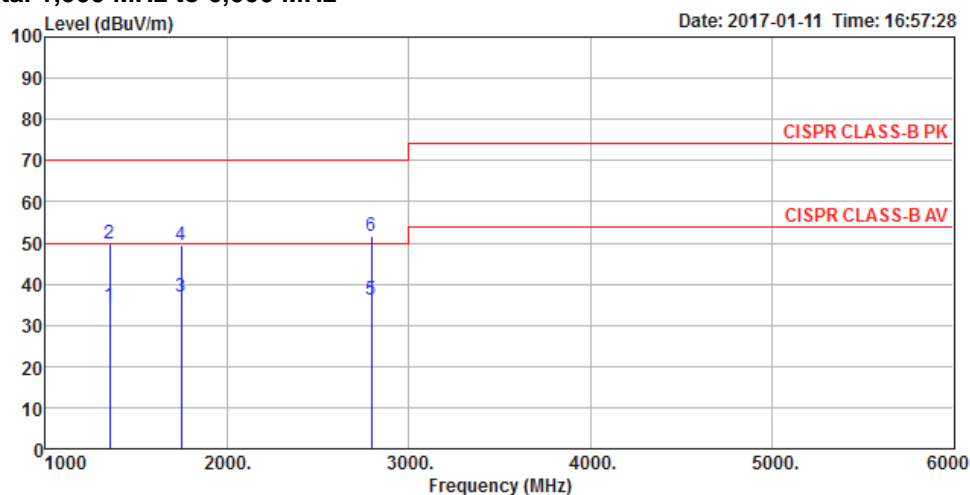

	Freq	Level	Limit Line	Over Limit	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	1355.00	34.76	50.00	-15.24	33.57	36.12	27.87	9.44	Average	100	211	HORIZONTAL
2	1355.00	49.93	70.00	-20.07	48.74	36.12	27.87	9.44	Peak	100	211	HORIZONTAL
3	1745.00	36.77	50.00	-13.23	33.90	35.95	29.55	9.27	Average	100	321	HORIZONTAL
4	1745.00	49.31	70.00	-20.69	46.44	35.95	29.55	9.27	Peak	100	321	HORIZONTAL
5	2795.00	35.99	50.00	-14.01	30.11	36.25	32.86	9.27	Average	100	12	HORIZONTAL
6	2795.00	51.76	70.00	-18.24	45.88	36.25	32.86	9.27	Peak	100	12	HORIZONTAL


Applicable Standard:	EN 55032:2015/AC:2016		
Temperature	22°C	Humidity	60%
Test Engineer	Gavin Peng	Frequency Range	1,000 MHz to 6,000 MHz
Test Mode	Mode 1		
<div>▪ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</div> <div>▪ Margin = - Limit + (Read Level + Antenna Factor + Cable Loss - Preamp Factor)</div> <div>▪ The test was passed at the minimum margin that marked by the frame in the following test record</div>			

Vertical 1,000 MHz to 6,000 MHz

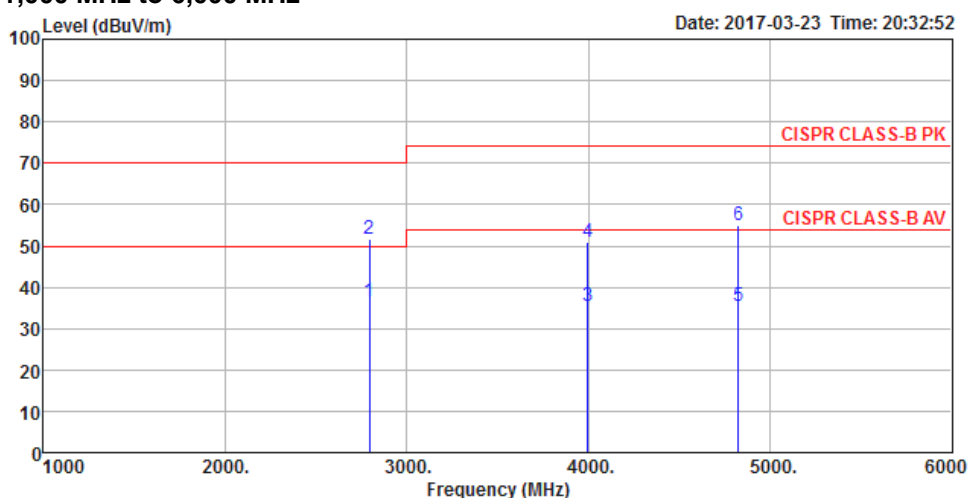

	Freq	Level	Limit Line	Over Limit	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2795.00	36.62	50.00	-13.38	30.74	36.25	32.86	9.27	Average	100	230	VERTICAL
2	2795.00	51.66	70.00	-18.34	45.78	36.25	32.86	9.27	Peak	100	230	VERTICAL
3	3995.00	35.39	54.00	-18.61	26.92	36.27	33.50	11.24	Average	100	304	VERTICAL
4	3995.00	50.76	74.00	-23.24	42.29	36.27	33.50	11.24	Peak	100	304	VERTICAL
5	4825.00	35.28	54.00	-18.72	25.23	36.38	34.20	12.23	Average	100	304	VERTICAL
6	4825.00	54.98	74.00	-19.02	44.93	36.38	34.20	12.23	Peak	100	304	VERTICAL

Horizontal 1,000 MHz to 6,000 MHz

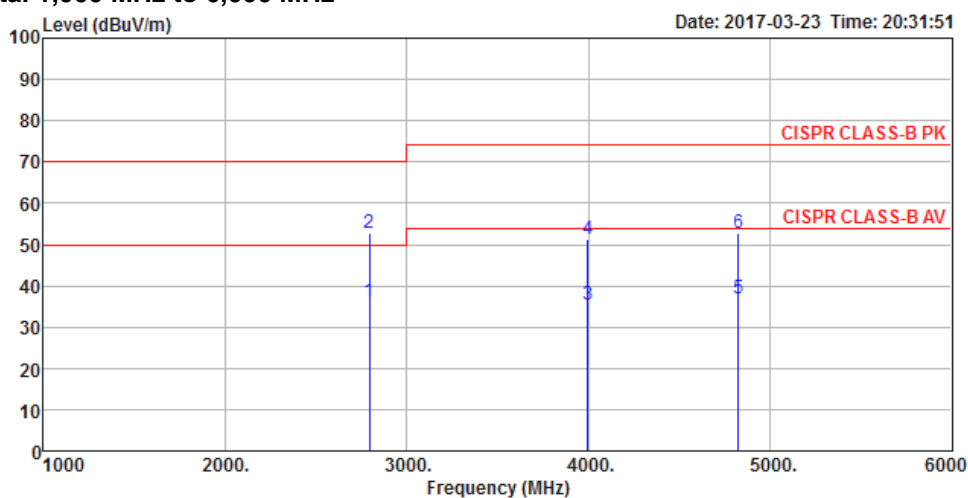

	Freq	Level	Limit	Over	Read	Preamp	Antenna	Cable	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2795.00	36.06	50.00	-13.94	30.18	36.25	32.86	9.27	Average	100	107	HORIZONTAL
2	2795.00	52.90	70.00	-17.10	47.02	36.25	32.86	9.27	Peak	100	107	HORIZONTAL
3	3995.00	35.48	54.00	-18.52	27.01	36.27	33.50	11.24	Average	100	283	HORIZONTAL
4	3995.00	51.27	74.00	-22.73	42.80	36.27	33.50	11.24	Peak	100	283	HORIZONTAL
5	4825.00	36.74	54.00	-17.26	26.69	36.38	34.20	12.23	Average	100	318	HORIZONTAL
6	4825.00	52.72	74.00	-21.28	42.67	36.38	34.20	12.23	Peak	100	318	HORIZONTAL

7. Harmonics Test

7.1. Standard

- EN 61000-3-2:2014


7.2. Test Procedure

The measured values of the harmonics components of the input current, including line current and neutral current, shall be compared with the limits given in Clause 7 of EN 61000-3-2.

7.3. Test Equipment Settings

Line Voltage	230 V
Line Frequency	50 Hz
Device Class	A

7.4. Test Setup

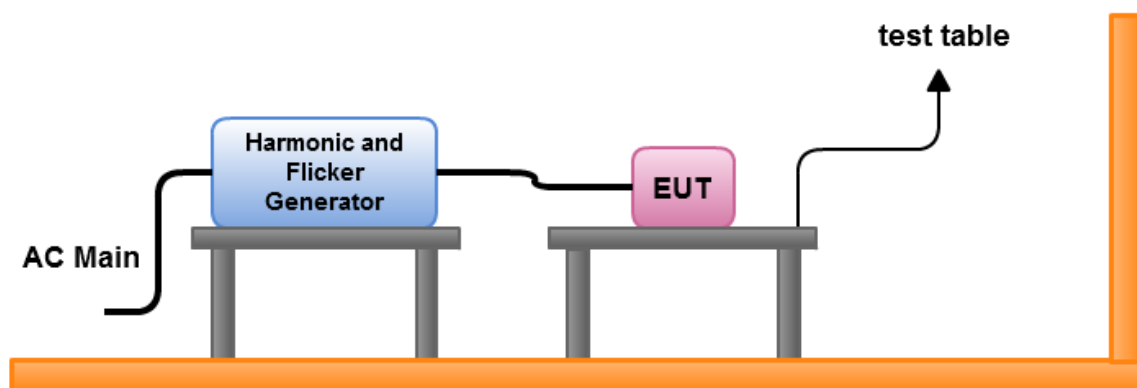

7.5. Test Result of Current Harmonics Test

Temperature	23°C	Humidity	58%								
Test Engineer	Kane Liu	Test Date	Mar. 23, 2017								
Test Mode	Mode 1										
<p>Highest parameter values during test:</p> <table><tr><td>V_RMS (Volts): 230.29</td><td>Frequency(Hz): 50.00</td></tr><tr><td>I_Peak (Amps): 1.144</td><td>I_RMS (Amps): 0.166</td></tr><tr><td>I_Fund (Amps): 0.059</td><td>Crest Factor: 7.844</td></tr><tr><td>Power (Watts): 10.7</td><td>Power Factor: 0.296</td></tr></table> <p><i><u>Note: The power consumption of EUT is lower than 75W, so the limit is not specified in</u></i></p> <p><i><u>EN 61000-3-2:2014.</u></i></p>				V_RMS (Volts): 230.29	Frequency(Hz): 50.00	I_Peak (Amps): 1.144	I_RMS (Amps): 0.166	I_Fund (Amps): 0.059	Crest Factor: 7.844	Power (Watts): 10.7	Power Factor: 0.296
V_RMS (Volts): 230.29	Frequency(Hz): 50.00										
I_Peak (Amps): 1.144	I_RMS (Amps): 0.166										
I_Fund (Amps): 0.059	Crest Factor: 7.844										
Power (Watts): 10.7	Power Factor: 0.296										

8. Voltage Fluctuations and Flicker Test

8.1. Standard

- EN 61000-3-3:2013

8.2. Test Procedure


The equipment shall be tested under the conditions of **Clause 5**.

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of $\pm 8\%$ is achieved during the whole assessment procedure.

8.3. Test Equipment Settings

Line Voltage	230 V
Line Frequency	50 Hz

8.4. Test Setup

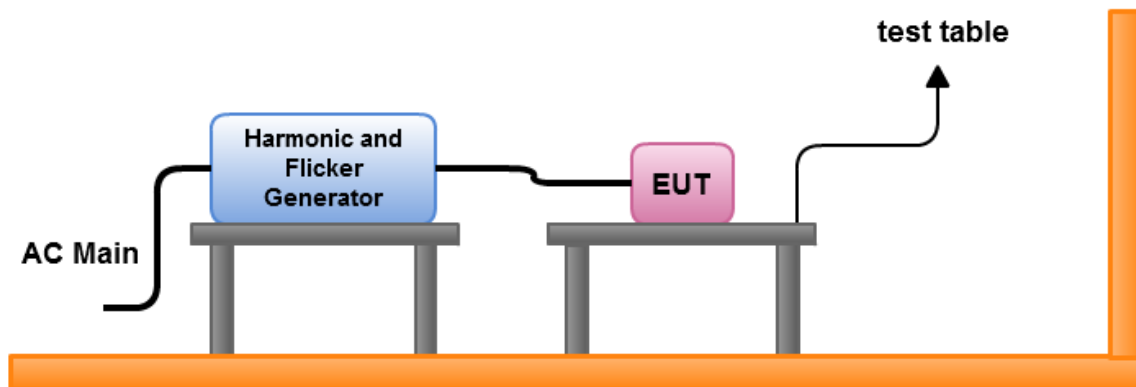

8.5. Test Result of Voltage Fluctuation and Flicker Test

Temperature	23℃	Humidity	58%
Test Engineer	Kane Liu	Test Date	Mar. 23, 2017
Test Mode	Mode 1	Final Test Result	Pass
<div>Vrms at the end of test (Volt):230.23</div> <div><div><div>Highest dt (%):0.00</div><div>T-max (mS):0</div><div>Highest dc (%):0.00</div><div>Highest dmax (%):0.03</div><div>Highest Pst (10 min. period):0.200</div></div><div><div>Test limit (%):3.30</div><div>Test limit (mS):500.0</div><div>Test limit (%):3.30</div><div>Test limit (%):4.00</div><div>Test limit:1.000</div></div><div><div>Pass</div><div>Pass</div><div>Pass</div><div>Pass</div><div>Pass</div></div></div>			

9. General Performance Criteria Description of Immunity Test

For EN 301 489-1

<p>CT / CR (Criterion A)</p>	<p>Performance criteria for continuous phenomena applied to transmitters and receivers</p> <p>During and after the test, the apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer when the apparatus is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.</p> <p>During the test the EUT shall not unintentionally transmit or change its actual operating state and stored data.</p>
<p>TT / TR (Criterion B)</p>	<p>Performance criteria for transient phenomena applied to transmitters and receivers</p> <p>After the test, the apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer, when the apparatus is used as intended.</p> <p>In some cases this permissible performance level may be replaced by a permissible loss of performance.</p>
<p>TT / TR (Criterion C)</p>	<p>Only for voltage interruption</p> <p>Performance criteria for transient phenomena applied to transmitters and receivers</p> <p>In the case where the equipment is powered solely from the AC mains supply (without the use of a parallel battery back-up) volatile user data may have been lost and if applicable the communication link need not to be maintained and lost functions should be recoverable by user or operator.</p>

For EN 55024

According to Clause 7.1 of EN 55024 standard, the following describes the general performance criteria.

Criterion A (Note 1)	<p>During and after the test the EUT shall continue to operate as intended without operator intervention.</p> <p>No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended.</p>
Criterion B (Note 2)	<p>During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.</p> <p>After the test, the equipment shall continue to operate as intended without operator intervention.</p> <p>For xDSL Terminal equipment:</p> <p>During the test shall not cause the system to lose the established connection or retrain.</p> <p>At the cessation of the test, the system shall operate in the condition established prior to the application of the test without user intervention.</p>
Criterion C	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

Note 1 : No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.


Note 2 : After the application of the phenomenon below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state if stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

9.1. Electrostatic Discharge Immunity Test (ESD)

9.2. Test Specification

Reference Standard	EN 61000-4-2 / IEC 61000-4-2	
Discharge Impedance	330 ohm / 150 pF	
Contact Discharge	± 2, 4 kV	
Air Discharge	± 2, 4, 8 kV	
Rise Time	0.8 ns +/-25 %	
Current at 30 ns	+/- 30 %	
Current at 60 ns	+/- 30 %	
Polarity	Positive / Negative	
Number of Discharge	For EN 301 489-1	Air Discharge 20 times at each test point
		Contact Discharge 20 times at each test point
	For EN 55024	Air Discharge 20 times at each test point
		Contact Discharge 50 times at each test point
Single Discharge Mode	1 discharge per 1s	

9.3. Test Setup

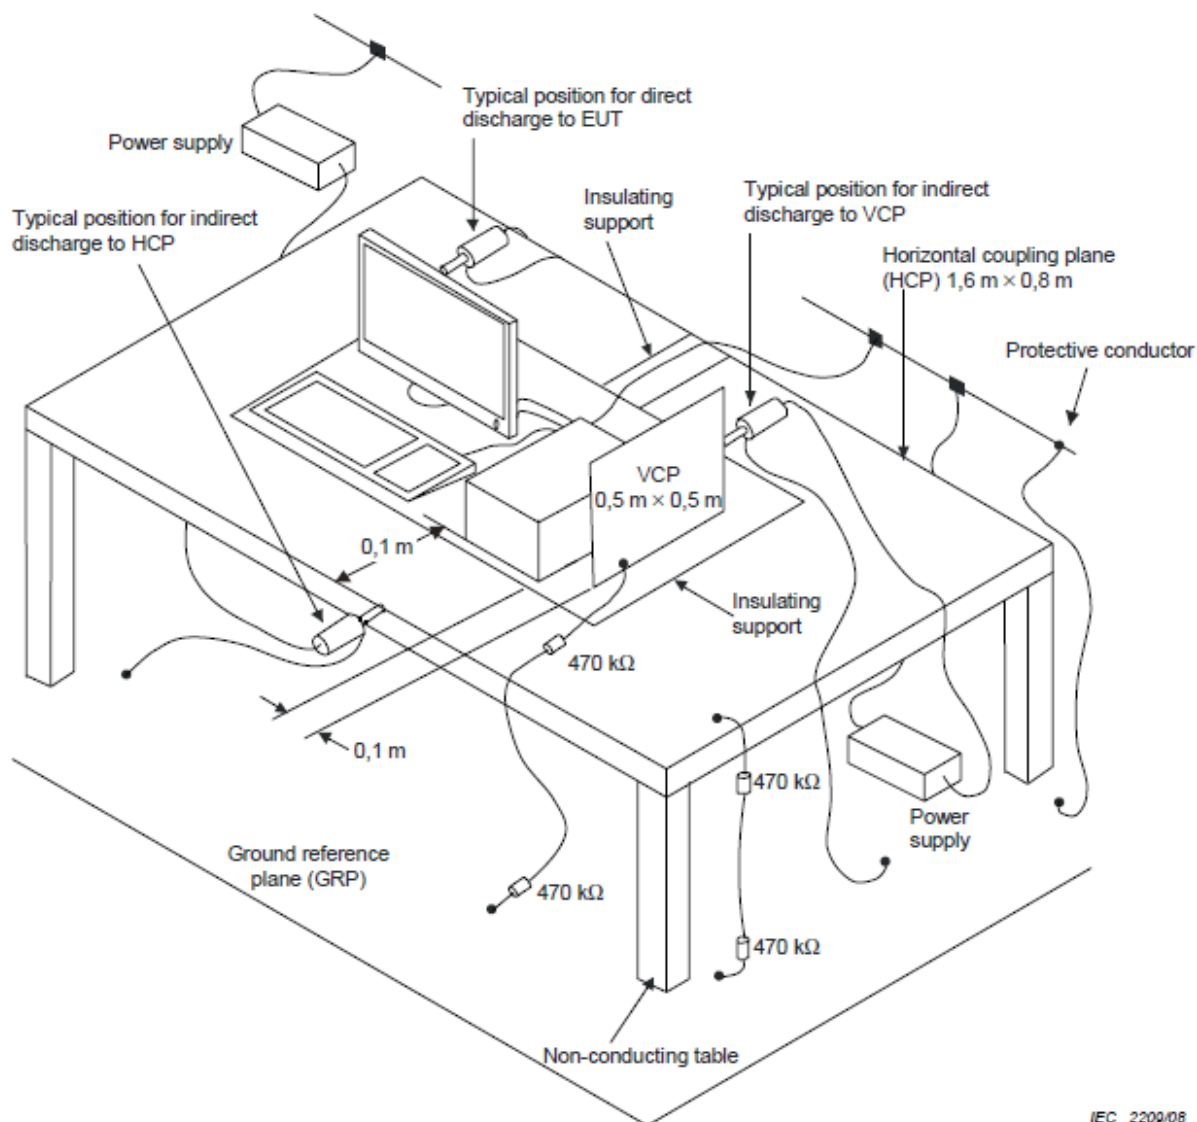

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the follow manner:

- CONTACT DISCHARGE to the conductive surfaces and to coupling plane;
- AIR DISCHARGE at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

9.4. Test Setup for Tests Performed in Laboratory

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. In the SPORTON EMC LAB., we provided 1 mm thickness aluminum ground reference plane or 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 1 m x 1 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1m minimum was provided between the EUT and the wall of the lab. and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470k ohm resistor located at each end, to prevent a build-up of charge. The test setup was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.

9.5. ESD Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 kPa (860 mbar) to 106 kPa (1060 mbar).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT.

The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- e. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- f. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted:
 - If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - The contact discharge test shall not be applied to such surfaces.
- g. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT . After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.

9.6. Test Result

Temperature	22°C	Humidity	51%
Pressure	101.1 kPa	Test Engineer	Da Den
Test Mode	Mode 1	Test Date	Mar. 31, 2017
Standard	Required Criteria B		
Test Standard	EN 301 489-1 V1.9.2 (2011-09) EN 301 489-17 V2.2.1 (2012-09) EN 55024:2010		
Test Recorded	There was no abnormal situation during the test compared with initial operation.		


Direct Application :


Test Point	Tested Voltage (kV)	Contact Discharge (Performance Criteria)	Air Discharge (Performance Criteria)
1~11, 14	± 2, 4, 8	-	A
12, 13	± 2, 4	A	-


Indirect Application :

Coupling Plan	Coupling Side	Test Voltage (kV)	Performance Criteria
HCP	Front / Rear / Right / Left	± 2, 4	A
VCP	Front / Rear / Right / Left	± 2, 4	A

9.7. Photographs of Electrostatic Discharge Immunity Test

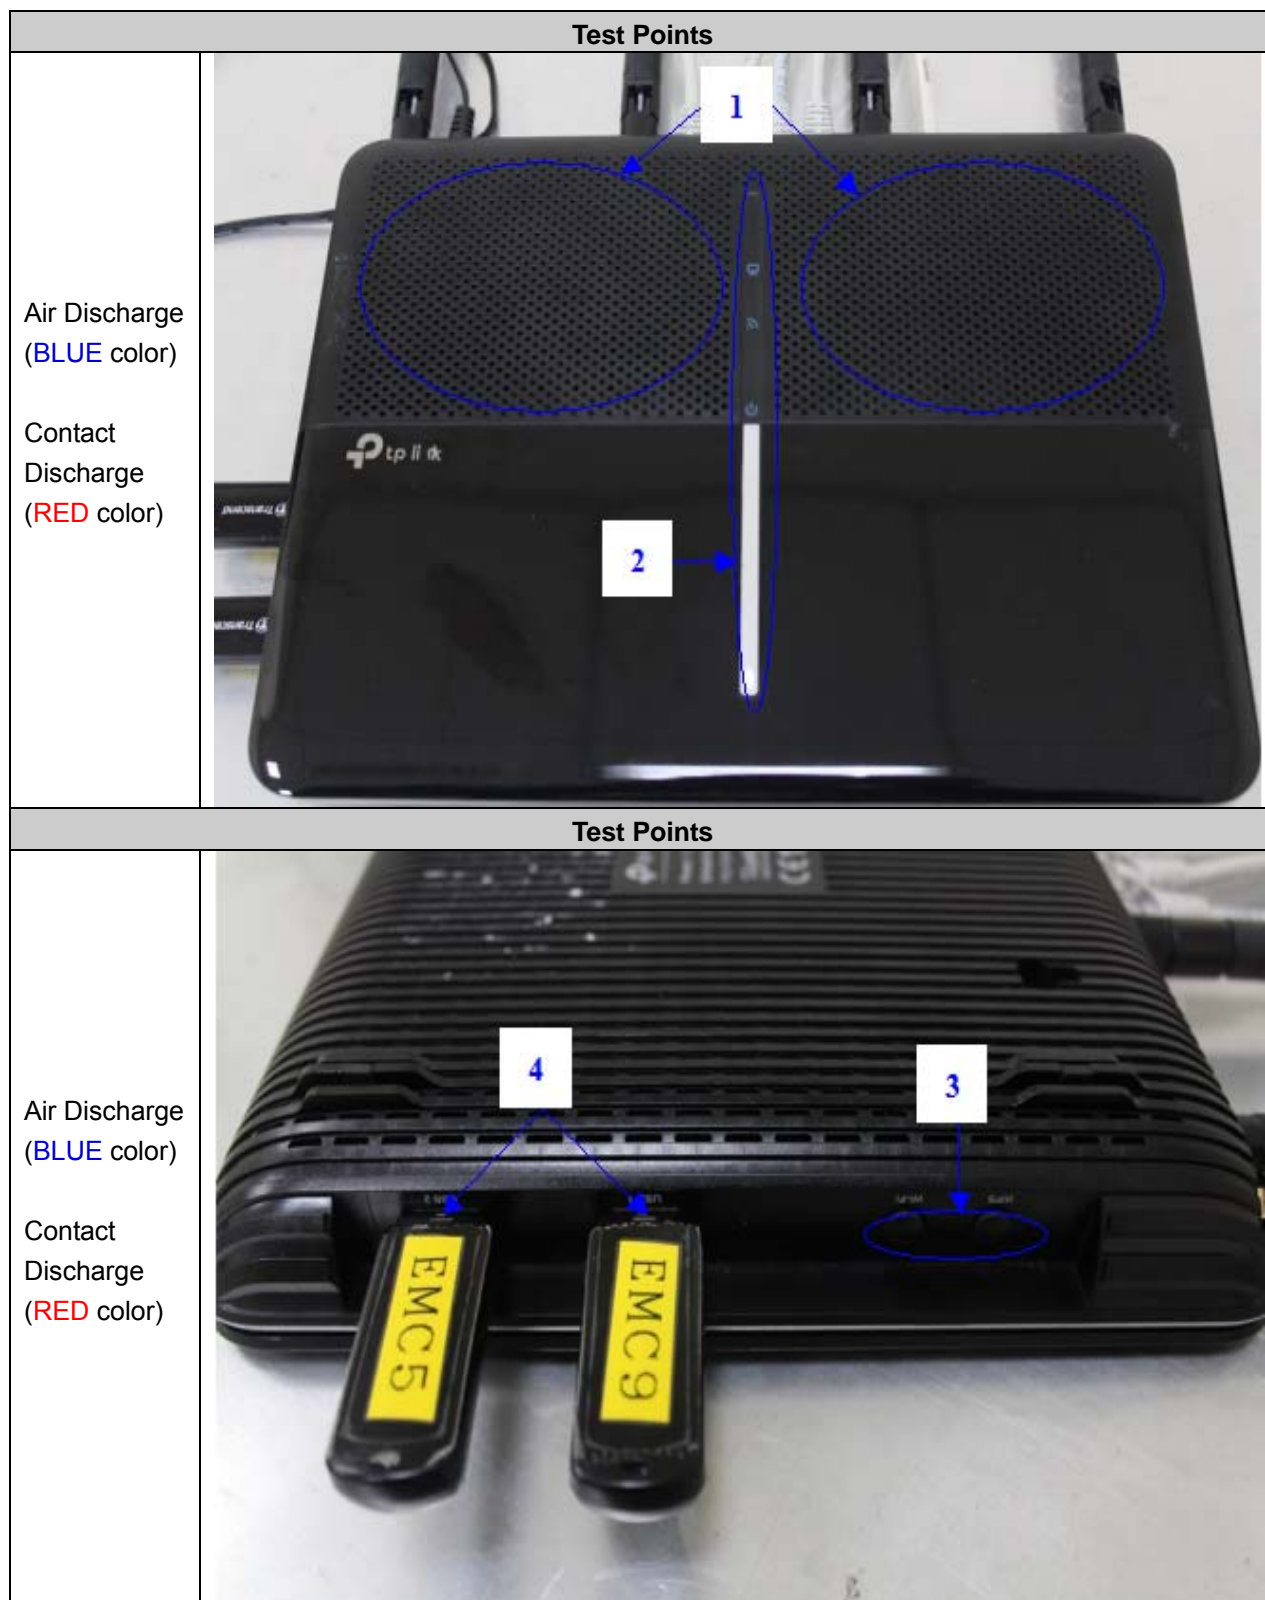

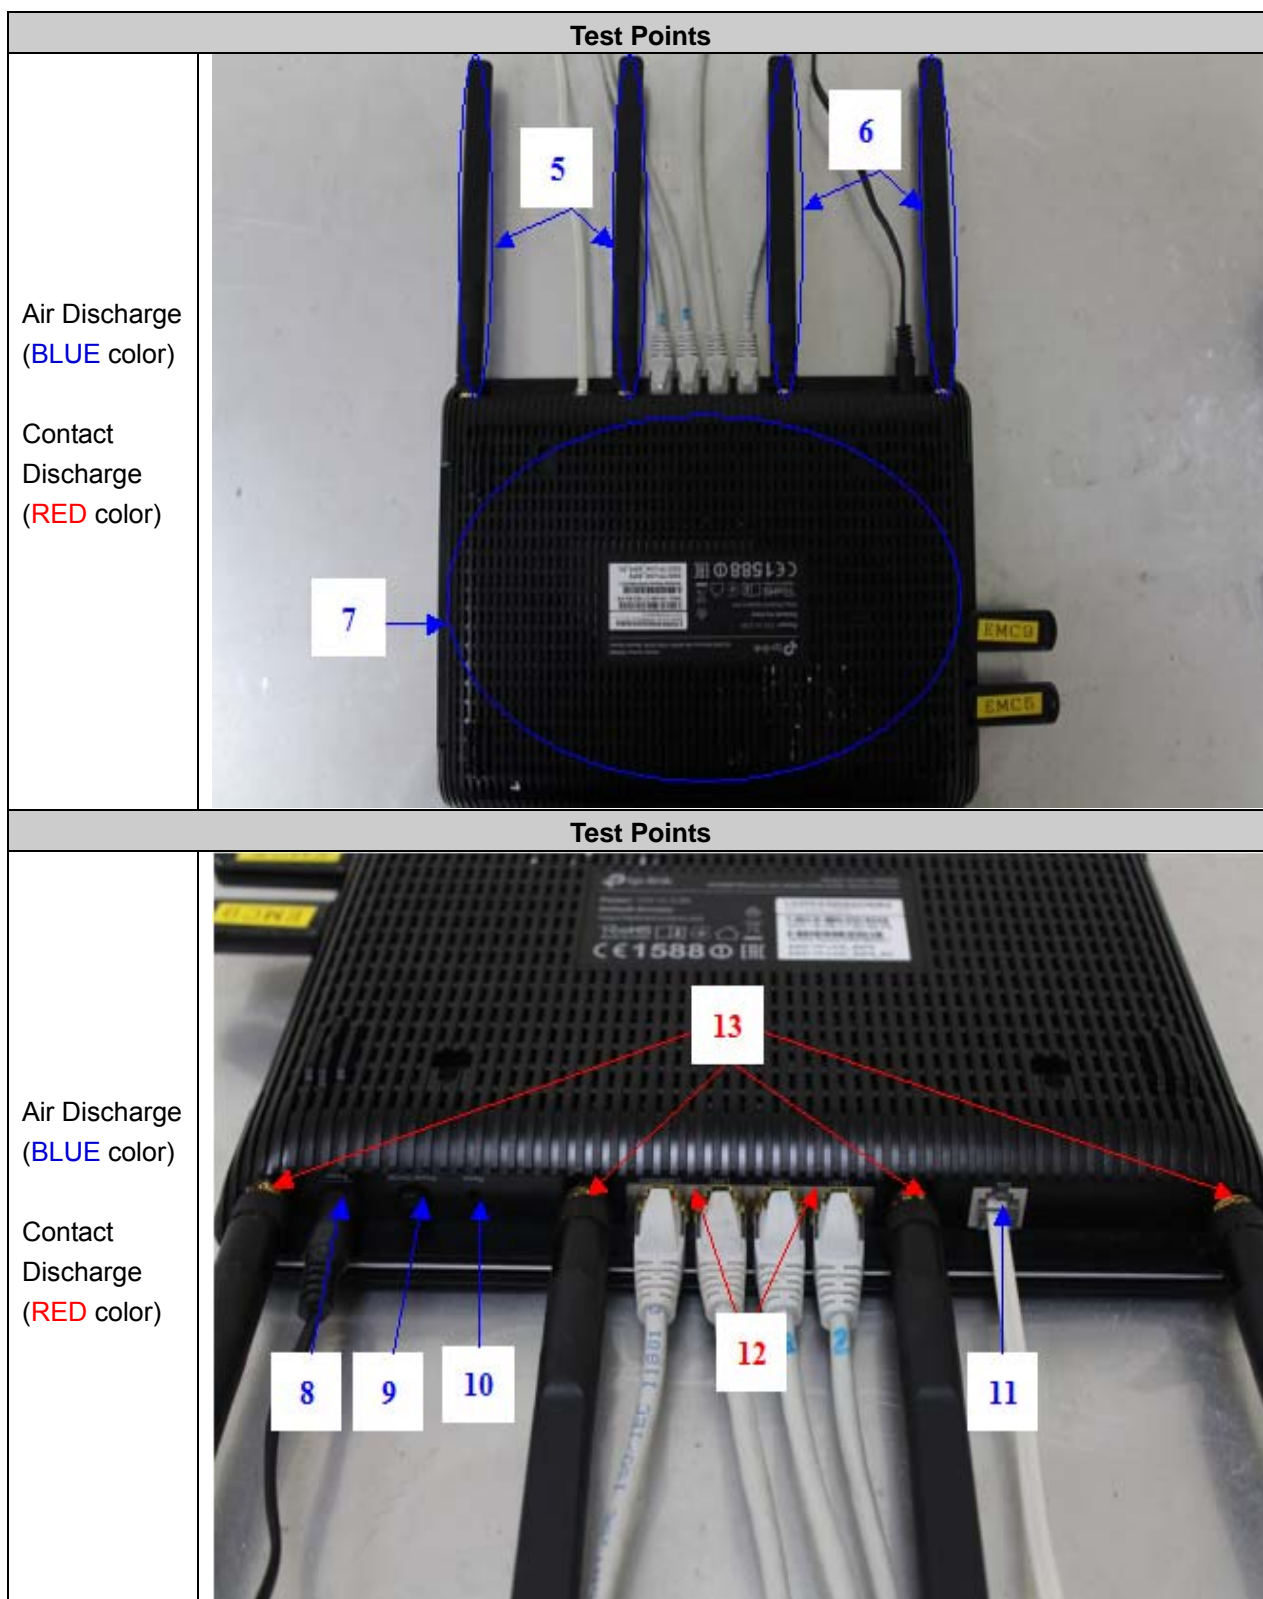


Test Points	
<p>Air Discharge (BLUE color)</p> <p>Contact Discharge (RED color)</p>	

10. Radio Frequency Electromagnetic Field Immunity Test (RS)

10.1. Test Specification

Reference Standard	EN 61000-4-3 / IEC 61000-4-3
Frequency Range	For EN 301 489-1: 80 MHz to 1,000 MHz and 1,400 MHz to 2,700MHz
	For EN 55024: 80 MHz to 1,000 MHz
Field Strength	3 V/m (un-modulated, r.m.s) 80% AM (1 kHz)
Frequency Step	1 %
Dwell Time	2.9 sec
Antenna Polarity	Vertical / Horizontal

10.2. Test Setup

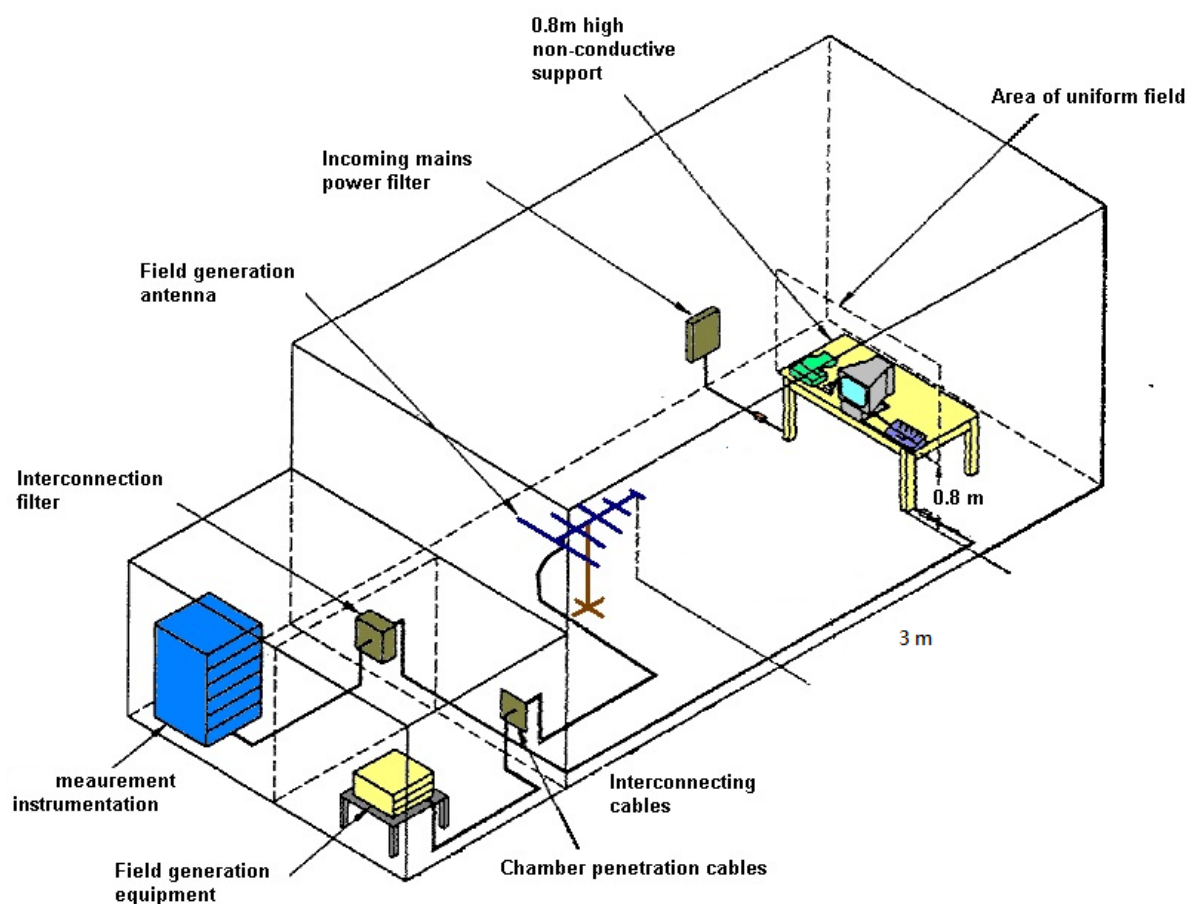

The procedure defined in this part requires the generation of electromagnetic fields within which the test sample is placed and its operation observed. To generate fields that are useful for simulation of actual (field) conditions may require significant antenna drive power and the resultant high field strength levels.

10.3. Test Procedure

- a. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- b. The bilog antenna which is enabling the complete frequency range of 80 MHz - 1,000 MHz and 1,400 MHz - 2,700MHz is placed 3m away from the equipment. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
- c. The test is normally performed with the generating antenna facing each of four sides of the EUT. The polarization of the field generated by the broadband (bilog) antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.
- d. At each of the above conditions, the frequency range is swept 80 MHz - 1,000 MHz and 1,400 MHz - 2,700MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of 1.5×10^{-3} decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.
- e. If need to use the exclusion band, for deferent equipment should be reference as below:

The exclusion band for 2.450 GHz equipment was from 2280 MHz to 2607.675 MHz.

10.4. Test Result

Temperature	25°C	Humidity	63%
Pressure	101.1 kPa	Test Engineer	Kane Liu
Test Mode	Mode 1	Test Date	Mar. 25, 2017
Standard	Required Criteria A		
Test Standard	EN 301 489-1 V1.9.2 (2011-09) EN 301 489-17 V2.2.1 (2012-09)		
Test Recorded	There was no abnormal situation during the test compared with initial operation.		

Frequency Range MHz	Field V/m	Antenna Polarization	EUT Face Exposed	Performance Criteria
80~1000	3	Vertical / Horizontal	Front / Back / Right / Left	A
1400~2700	3	Vertical / Horizontal	Front / Back / Right / Left	A

Temperature	25°C	Humidity	63%
Pressure	101.1 kPa	Test Engineer	Kane Liu
Test Mode	Mode 1	Test Date	Mar 25, 2017
Standard	Required Criteria A		
Test Standard	EN 55024:2010		
Test Recorded	There was no abnormal situation during the test compared with initial operation.		


Frequency Range MHz	Field V/m	Antenna Polarization	EUT Face Exposed	Performance Criteria
80~1000	3	Vertical / Horizontal	Front / Back / Right / Left	A

11. Electrical Fast Transient/Burst Immunity Test (EFT/BURST)

11.1. Test Specification

Reference Standard	EN 61000-4-4 / IEC 61000-4-4
Test Voltage	AC Power Line: ± 1 kV
	Telecommunication/Signal Line: ± 0.5 kV
Polarity	Positive / Negative
Rise time of the pulses	5 ns
Impulse duration	50 ns
Burst duration	15 ms for 5 kHz
Burst period	300 ms
Impulse Frequency	For EN 301 489-1: 5 kHz
	For EN 55024: Power: 5 kHz Telecommunication/Signal: 100 kHz (Only for xDSL equipment)
Duration	1 min

11.2. Test Setup

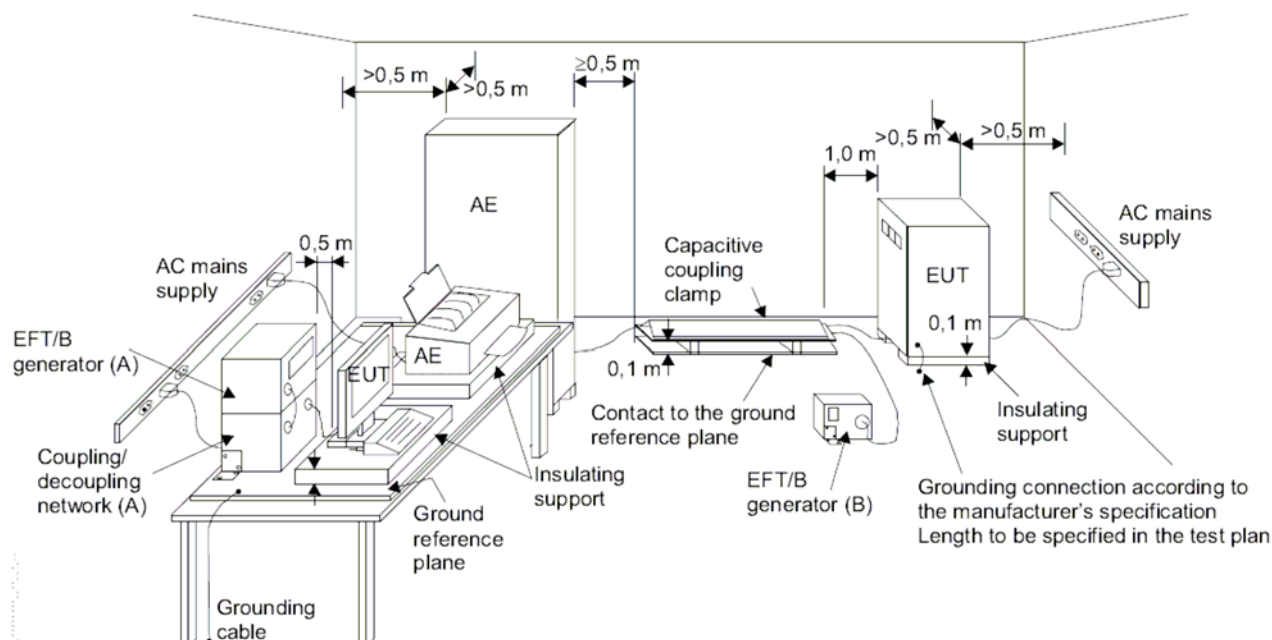

IEC 645/12

The EUT was placed on a ground reference plane and was insulated from it by an insulating support about 0.1m thick. If the EUT is table-top equipment, it was located approximately 0.8 m above the GRP. The GRP was a metallic sheet (copper or aluminum) of 0.25 mm minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. It shall project beyond the EUT by at least 0.1 m on all sides and connected to the protective earth. In the SPORTON EMC LAB. We provided 1 mm thickness aluminum ground reference plane or 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 1 m x 1 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system. The EUT was arranged and connected according to its functional requirements. The minimum distance between the EUT and other conductive structures, except the GRP. Beneath the EUT, was more than 0.5 m. Using the coupling clamp, the minimum distance between the coupling plates and all other conductive structures, except the GRP. Beneath the EUT, was more than 0.5 m. The length of the signal and power lines between the coupling device and the EUT was 0.5m or less.

11.3. Test Procedure

- a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 45% to 75%;
 - atmospheric pressure : 86 kPa (860 mbar) to 106 kPa (1060 mbar).
- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria :
 - Normal performance within the specification limits.
 - Temporary degradation or loss of function or performance which is self-recoverable.
 - Temporary degradation or loss of function or performance which requires operator intervention or system reset.
 - Degradation or loss of function which is not recoverable due to damage of equipment (components).

11.4. Test Result

Temperature	25°C	Humidity	63%
Pressure	101.1 kPa	Test Engineer	Kane Liu
Test Mode	Mode 1	Test Date	Mar. 25, 2017
Standard	Required Criteria B		
Test Standard	EN 301 489-1 V1.9.2 (2011-09) EN 301 489-17 V2.2.1 (2012-09) EN 55024:2010		
Test Recorded	There was no abnormal situation during the test compared with initial operation.		

AC Power Port :

AC Phase	Test Voltage (kV)
	±1 kV
L	A
N	A
L-N	A

Telecommunication Port :


Telecommunication Port	Test Voltage (kV)
	±0.5 kV
LAN	A
DSL	A
LAN / WAN	A

12. Surge Immunity Test

12.1. Test Specification

Reference Standard	EN 61000-4-5 / IEC 61000-4-5
Test Voltage	For EN 301 489-1: AC Power Port: $\pm 0.5, 1 \text{ kV}$ Indoor Telecommunication Port: $\pm 0.5 \text{ kV}$ Outdoor Telecommunication Port: $\pm 0.5, 1 \text{ kV}$
	For EN55024: AC Power Port: $\pm 0.5, 1 \text{ kV}$ Outdoor Telecommunication Port: $\pm 0.5, 1 \text{ kV}$
Polarity	Positive / Negative
Wave Shape	For EN 301 489-1: 1.2/50 μs Open-circuit voltage 8/20 μs Short-circuit current For EN 55024: Power Port: 1.2/50 μs Open-circuit voltage 8/20 μs Short-circuit current Telecommunication/Signal port: 10/700 μs Open-circuit voltage 5/320 μs Short-circuit current
Phase Angle	$0^\circ, 90^\circ, 180^\circ, 270^\circ$
Time between successive pulses	60 sec.
Number of test	5 positive and 5 negative

12.2. Test Setup

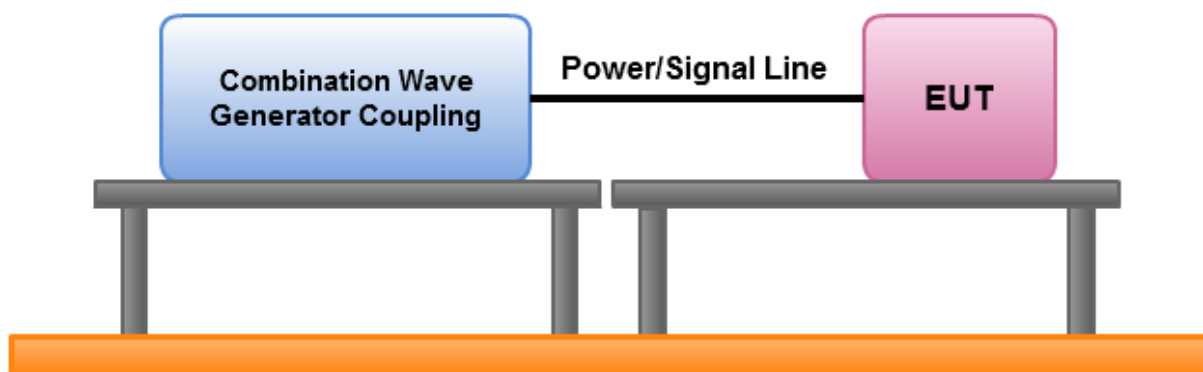

12.3. Test Procedure

a. Climatic conditions

The climatic conditions shall comply with the following requirements :

- ambient temperature : 15 °C to 35 °C
- relative humidity : 10 % to 75 %
- atmospheric pressure : 86 kPa to 106 kPa (860 mbar to 1060 mbar)

b. Electromagnetic conditions

The electromagnetic environment of the laboratory shall not influence the test results.

c. The test shall be performed according the test plan that shall specify the test set-up with

- generator and other equipment utilized;
- test level (voltage/current);
- generator source impedance;
- internal or external generator trigger;
- number of tests: at least five positive and five negative at the selected points;
- repetition rate: maximum 1/min.
- inputs and outputs to be tested;
- representative operating conditions of the EUT;
- sequence of application of the surge to the circuit;
- phase angle in the case of a.c. power supply;
- actual installation conditions, for example :
AC : neutral earthed,
DC : (+) or (-) earthed to simulated the actual earthing conditions.

d. If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the a.c. voltage wave (positive and negative).

e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.

f. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.

g. If the actual operating signal sources are not available, they may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according to the test plan.

h. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test a previously unstressed equipment shall be used to the protection devices shall be replaced.

12.4. Test Result

Temperature	24°C	Humidity	59%
Pressure	101.1 kPa	Test Engineer	Edison Lin
Test Mode	Mode 1	Test Date	Mar. 30, 2017
Standard	Required Criteria B		
Test Standard	EN 301 489-1 V1.9.2 (2011-09) EN 301 489-17 V2.2.1 (2012-09)		
Test Recorded	There was no abnormal situation during the test compared with initial operation.		

AC Power Port:

Voltage (kV)	Test Location	Polarity	Phase Angle			
			0°	90°	180°	270°
0.5, 1 kV	L - N	+	A	A	A	A
		—	A	A	A	A

Telecommunication Port:

Voltage (kV)	Test Location	Polarity	Performance Criteria
0.5 kV	LAN (Indoor)	+	A
		—	A
0.5 kV	LAN/WAN (Indoor)	+	A
		—	A
0.5, 1 kV	DSL (Outdoor)	+	A
		—	A

Temperature	24°C	Humidity	59%
Pressure	101.1 kPa	Test Engineer	Edison Lin
Test Mode	Mode 1	Test Date	Mar. 30, 2017
Standard	Required Criteria B		
Test Standard	EN 55024:2010		
Test Recorded	There was no abnormal situation during the test compared with initial operation.		

AC Power Port:

Voltage (kV)	Test Location	Polarity	Phase Angle			
			0°	90°	180°	270°
0.5, 1 kV	L - N	+	A	A	A	A
		—	A	A	A	A

Telecommunication Port:


Voltage (kV)	Test Location	Polarity	Performance Criteria
0.5, 1 kV	DSL (Outdoor)	+	A
		—	A

13. Conducted Disturbances Induced by Radio-Frequency Field Immunity Test (CS)

13.1. Test Specification

Reference Standard	EN 61000-4-6 / IEC 61000-4-6
Frequency Range	150 kHz~80 MHz
Field Strength	3 Vr.m.s (un-modulated, r.m.s) 80% AM (1 kHz)
Frequency Step	1 %
Dwell Time	2.9 sec
Coupling mode	CDN M016(M2), CDN T8-10, CDN T200A, CDN T800

13.2. Test Setup

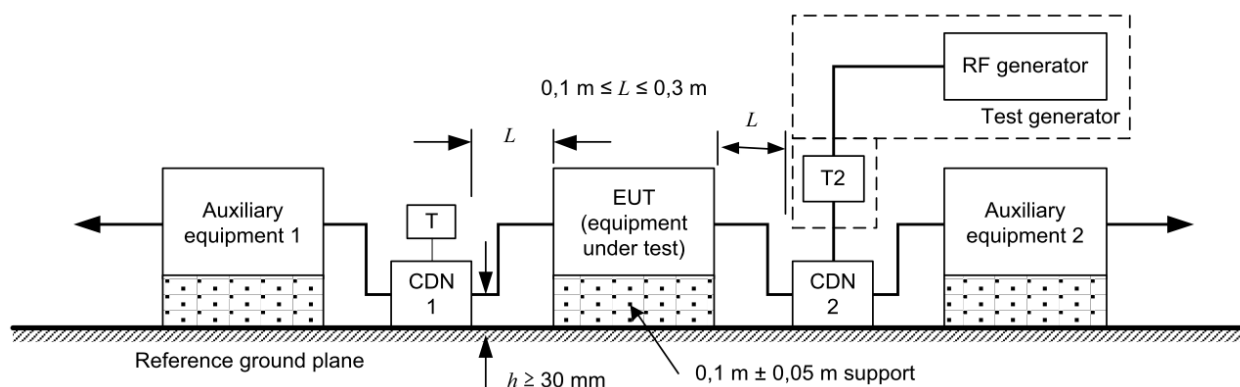

13.3. Test Procedure

- a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a self-shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. The frequency range is swept from 150 kHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1kHz sinewave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency(ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- f. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.
- g. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- h. The use of special exercising programs is recommended.
- i. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- j. It may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.

13.4. Test Result

Temperature	25°C	Humidity	63%
Pressure	101.1 kPa	Test Engineer	Kane Liu
Test Mode	Mode 1	Test Date	Mar. 25, 2017
Standard	Required Criteria A		
Test Standard	EN 301 489-1 V1.9.2 (2011-09) EN 301 489-17 V2.2.1 (2012-09) EN 55024:2010		
Test Recorded	There was no abnormal situation during the test compared with initial operation.		


Frequency Range MHz	V (r.m.s)	CDN	Coupling port	Performance Criteria
0.15 ~ 80	3	M016(M2)	AC power	A
0.15 ~ 80	3	T8-10	LAN 1Gbps	A
0.15 ~ 80	3	T8-10	LAN/WAN 1Gbps	A
0.15 ~ 80	3	T200A	DSL	A

14. Power Frequency Magnetic Field Immunity Tests

14.1. Test Specification

Reference Standard	IEC 61000-4-8
Frequency Range	50 Hz
Field Strength	1 A/m
Observation type	1 min
Inductance Coil	1 m x 1 m

14.2. Test Setup

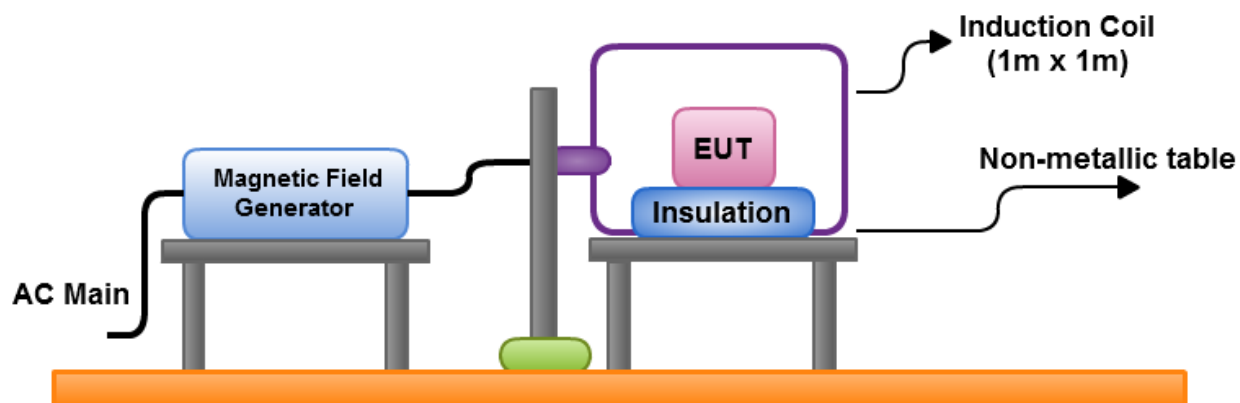

14.3. Test Procedure

- The equipment is configured and connected to satisfy its functional requirements.
- The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

14.4. Test Result

Temperature	25°C	Humidity	63%
Pressure	101.1 kPa	Test Engineer	Kane Liu
Test Mode	Mode 1	Test Date	Mar. 23, 2017
Standard	Required Criteria A		
Test Standard	EN 55024:2010		
Test Recorded	There was no abnormal situation during the test compared with initial operation.		


Power Frequency Magnetic Field	Testing duration	Coil Orientation	Performance Criteria
50 Hz, 1 A/m	1.0 Min	X-axis	A
50 Hz, 1 A/m	1.0 Min	Y-axis	A
50 Hz, 1 A/m	1.0 Min	Z-axis	A

15. Voltage Dips and Voltage Interruptions Immunity Tests

15.1. Test Specification

Reference Standard	EN 61000-4-11 / IEC 61000-4-11	
Test Voltage	For EN 301 489-1	Voltage Dip :
		1. 0% residual, 0.5 period
		2. 0% residual, 1.0 period
		3. 70% residual, 25 period
	For EN 55024	Voltage interruptions
		4. 0% residual, 250 period
		Voltage Dip :
		1. >95%, Reduction, 0.5 period
		2. 30%, Reduction, 25 period
		Voltage interruptions
		3. >95%, Reduction, 250 period
Test Duration Time	3 times	
Intervals between event	10 sec.	
Test Angle	0, 180°	

15.2. Test Setup

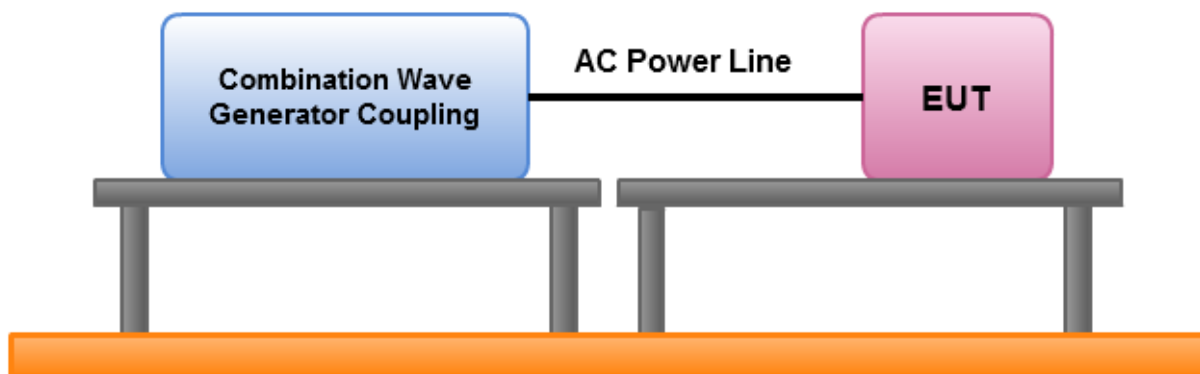

15.3. Test Conditions

1. Source voltage and frequency: 100/230/240V / 50Hz, Single phase.
2. Test of interval: 10 sec.
3. Level and duration: Sequency of 3 dips/interrupts.
4. Voltage rise (and fall) time: 1 ~ 5 μ s.

15.4. Test Result

Temperature	25°C	Humidity	63%
Pressure	101.1 kPa	Test Engineer	Kane Liu
Test Mode	Mode 1	Test Date	Mar. 25, 2017
Standard	Required Criteria B/B/B/C		
Test Standard	EN 301 489-1 V1.9.2 (2011-09) EN 301 489-17 V2.2.1 (2012-09)		
Test Recorded	The EUT had "reboot" situation happened during the test, need manual reset the DSL function after the test.		

Voltage Dip & Interruption :

Voltage (V)	Frequency (Hz)	% Residual	Periods	ms	Performance Criteria
100	50	0%	0.5	10	A
		0%	1.0	20	A
		70%	25	500	A
		Interruption 0%	250	5000	C

Voltage (V)	Frequency (Hz)	% Residual	Periods	ms	Performance Criteria
230	50	0%	0.5	10	A
		0%	1.0	20	A
		70%	25	500	A
		Interruption 0%	250	5000	C

Voltage (V)	Frequency (Hz)	% Residual	Periods	ms	Performance Criteria
240	50	0%	0.5	10	A
		0%	1.0	20	A
		70%	25	500	A
		Interruption 0%	250	5000	C

Temperature	25°C	Humidity	63%
Pressure	101.1 kPa	Test Engineer	Kane Liu
Test Mode	Mode 1	Test Date	Mar. 25, 2017
Standard	Required Criteria B/C/C		
Test Standard	EN 55024:2010		
Test Recorded	The EUT had "reboot" situation happened during the test, need manual reset the DSL function after the test.		

Voltage Dip & Interruption :

Voltage (V)	Frequency (Hz)	% Reduction	Periods	ms	Performance Criteria
100	50	>95 %	0.5	10	A
		30 %	25	500	A
		>95%	250	5,000	C

Voltage (V)	Frequency (Hz)	% Reduction	Periods	ms	Performance Criteria
230	50	>95 %	0.5	10	A
		30 %	25	500	A
		>95%	250	5,000	C

Voltage (V)	Frequency (Hz)	% Reduction	Periods	ms	Performance Criteria
240	50	>95 %	0.5	10	A
		30 %	25	500	A
		>95%	250	5,000	C

16. List of Measuring Equipment Used

<EMI>

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 23, 2017	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 14, 2016	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 21, 2016	Conduction (CO01-CB)
Impedance Stabilization Network	Teseq	ISN T400A	24854	150kHz ~ 230MHz	Dec. 20, 2016	Conduction (CO01-CB)
Impedance Stabilization Network	Teseq	ISN T800	24557	150kHz ~ 230MHz	Nov. 01, 2016	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
10m Semi Anechoic Chamber	TDK	NSA	10CH01-CB	30MHz~1GHz 10m	Mar. 30, 2016	Radiation (10CH01-CB)
10m Semi Anechoic Chamber	TDK	VSWR	10CH01-CB	1GHz ~40GHz 3m	Mar. 30, 2016	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 24, 2016	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10259	9kHz ~ 1.3GHz	Jan. 16, 2017	Radiation (05CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 09, 2016	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 13, 2017	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	-	25MHz ~ 1GHz	Nov. 30, 2016	Radiation (10CH01-CB)
High Cable	Woken	SUCOFLEX 104	-	25MHz ~ 1GHz	Nov. 30, 2016	Radiation (10CH01-CB)
Biconical Antenna	Schwarzbeck	VHBB 9124	324	30MHz ~ 200MHz	Apr. 20, 2016	Radiation (10CH01-CB)
Log Antenna	Schwarzbeck	VUSLP 9111	247	200MHz ~ 1GHz	May 26, 2016	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESCI	100186	9kHz ~ 3GHz	Jul. 07, 2016	Radiation (10CH01-CB)
Spectrum Analyzer	Rohde&Schwarz	FSV30	101026	9kHz ~ 30GHz	Jan. 03, 2017	Radiation (10CH01-CB)
Horn Antenna	ESCO	3117	00081283	1GHz ~ 18GHz	Nov. 29, 2016	Radiation (10CH01-CB)
Amplifier	Agilent	8449B	3008A02660	1GHz ~ 26.5GHz	May 23, 2016	Radiation (10CH01-CB)
CABLE(1~40G)	Woken	SUCOFLEX 104	-	1GHz ~ 40GHz	Nov. 30, 2016	Radiation (10CH01-CB)
Software	Audix	E3	6.120210m	-	N.C.R.	Radiation (10CH01-CB)

※ Calibration Interval of instruments listed above is one year.

※ N.C.R. means Non-Calibration required.

<EMS>

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Harmonic/Flicker	Teseq	CCN 1000-1	1306A00130	N/A	Mar. 15, 2017	Harmonic/Flicker
Software	Teseq	WIN2100V3	-	-	N.C.R.	Harmonic/Flicker
ESD Simulator	Teseq QG	NSG 437	1053	Air: 0 kV ~ 30 kV, Contact: 0 kV ~ 30kV	Nov. 12, 2016	ESD
Integrated Measurement System	R&S	IMS	100002	9kHz ~ 3GHz	May 10, 2016	RS
Average Power Sensor	R&S	NRP-Z91	101117	9kHz ~ 6GHz	Mar. 29, 2016	RS
RF Power Amplifier	AR	250W1000A	0323202	80MHz ~ 1GHz, 250W	Mar. 31, 2016	RS
Log-Periodic Antenna	AR	AT1080	0323130	80MHz ~ 1GHz	N.C.R.	RS
Software	R&S	EMC32	5.20.1	-	N.C.R.	RS
Isotropic Probe	ETS-LINDGREN	HI-6105	00130664	100kHz-6GHz	Oct. 10, 2016	RS
EFT Generator	KEYTEK	EMC Pro	0408325	0 kV ~ 4.4 kV	Jan. 05, 2017	EFT
Surge Generator	KEYTEK	EMC Pro	0408325	0 ~ 6kV	Jan. 05, 2017	Surge
PQF Generator	KEYTEK	EMC Pro	0408325	100~240V/50Hz /60Hz	Jan. 05, 2017	DIP
Software	KEYTEK	CeWave32	3.00	-	N.C.R.	Surge/EFT/DIP
Surge Coupling Decoupling Network	Teseq AG	CDN HSS-2	34278	0.25kV~2kV	Nov. 14, 2016	Surge
RF-Generator	Teseq GmbH	NSG 4070B-30	035084	150kHz~230MHz	Apr. 19, 2016	CS
Coupling decoupling network	Teseq GmbH	CDN M016	34634	150kHz~80MHz	Apr. 06, 2016	CS
Coupling decoupling network	Teseq GmbH	CDN T8-10	41243	150kHz~230MHz	Oct. 21, 2016	CS
Coupling decoupling network	Teseq GmbH	CDN T200A	30493	150kHz~230MHz	Apr. 06, 2016	CS
Coupling decoupling network	Teseq GmbH	CDN T800	34369	150kHz~230MHz	Apr. 06, 2016	CS
Software	Tesq	NSG4070	030593.V1.28	-	N.C.R.	CS
Magnetic field Immunity Loop	FCC	F-1000-4-8/9/10 -L-1AM	04014,04017	30A//CONTINUOUS, 100A/2Hrs, 230A/30SEC	Jul. 28, 2016	Magnetic

※ Calibration Interval of instruments listed above is one year.

※ N.C.R. means Non-Calibration required.

17. Uncertainty of Test Site

Test Items	Uncertainty	Remark
Conducted Emissions	3.2 dB	Confidence levels of 95%
Radiated Emissions below 1GHz	4.0 dB	Confidence levels of 95%
Radiated Emissions above 1GHz	4.7 dB	Confidence levels of 95%

Immunity Test Measurement Uncertainty

Electrostatic Discharge Immunity (ESD)
Negative Discharge Current

From Standard										
	First Peak Current	Current at 30ns	Current at 60ns	From calibration certificate						
2kV					Measured First Peak Current	1st Peak Worst case +5%	Measured Current at 30ns	30ns Worst case +5%	Measured Current at 60ns	60ns Worst case +5%
Nominal	7.5	4.0	2.0	Positive	6.9	7.2	3.6	3.8	1.9	2.0
Min.	6.4	2.8	1.4	Negative	7.3	7.7	3.7	3.9	1.9	2.0
Max.	8.6	5.2	2.6	Min.		6.4		2.8		1.4
Tolerance in %	0.2	0.3	0.3	Max.		8.6		5.2		2.6

	First Peak Current	Current at 30ns	Current at 60ns							
4kV					Measured First Peak Current	1st Peak Worst case +5%	Measured Current at 30ns	30ns Worst case +5%	Measured Current at 60ns	60ns Worst case +5%
Nominal	15.0	8.0	4.0	Positive	14.4	15.1	7.6	7.9	3.8	4.0
Min.	12.8	5.6	2.8	Negative	14.1	14.8	7.4	7.8	4.0	4.2
Max.	17.3	10.4	5.2	Min.		12.8		5.6		2.8
Tolerance in %	0.2	0.3	0.3	Max.		17.3		10.4		5.2

	First Peak Current	Current at 30ns	Current at 60ns							
6kV					Measured First Peak Current	1st Peak Worst case -5%	Measured Current at 30ns	30ns Worst case +5%	Measured Current at 60ns	60ns Worst case +5%
Nominal	22.5	12.0	6.0	Positive	21.2	22.2	11.2	11.7	5.8	6.1
Min.	19.1	8.4	4.2	Negative	20.7	21.7	11.1	11.7	6.0	6.2
Max.	25.9	15.6	7.8	Min.		19.1		8.4		4.2
Tolerance in %	0.2	0.3	0.3	Max.		25.9		15.6		7.8

	First Peak Current	Current at 30ns	Current at 60ns							
8kV					Measured First Peak Current	1st Peak Worst case -5%	Measured Current at 30ns	30ns Worst case +5%	Measured Current at 60ns	60ns Worst case +5%
Nominal	30.0	16.0	8.0	Positive	27.8	29.1	14.7	15.4	7.6	8.0
Min.	25.5	11.2	5.6	Negative	28.4	29.8	15.0	15.7	7.8	8.1
Max.	34.5	20.8	10.4	Min.		25.5		11.2		5.6
Tolerance in %	0.2	0.3	0.3	Max.		34.5		20.8		10.4

Negative Discharge Voltage

Standard Parameters					Calculated Range		
Indicated Voltage (kV)	Polarity	Tolerance (%)	Max. (kV)	Min. (kV)	Calibration (kV)	Max. (kV)	Min. (kV)
2	Positive	15.0	2.3	1.7	2.0	2.0	2.0
	Negative	15.0	2.3	1.7	2.1	2.6	2.6
4	Positive	15.0	4.6	3.4	4.0	4.0	4.0
	Negative	15.0	4.6	3.4	4.1	4.1	4.1
6	Positive	15.0	6.9	5.1	6.0	6.0	6.0
	Negative	15.0	6.9	5.1	6.1	6.1	6.1
8	Positive	15.0	9.2	6.8	8.0	8.0	7.9
	Negative	15.0	9.2	6.8	8.1	8.1	8.1
15	Positive	15.0	17.3	12.8	15.2	15.2	15.2
	Negative	15.0	17.3	12.8	14.9	14.9	14.9

It has been demonstrated that the ESD generator meets the specified requirements in the standard with at least a 95% confidence.

**Radio Frequency Electromagnetic Field Immunity (RS)
IMS**

Frequency 10MHz Output Check	
Standard	Reading
10 MHz	9,999,985.8 Hz

Frequency Accuracy/offset : 1.4E-07

Frequency Stability : 5E-09/1.0S

Uncertainty: 4.0E-06

Gain Flatness Measurement (For 80 MHz to 1 GHz Amp.)		
Freq. (MHz)	Reading (dB)	Expected (dB)
80.0	62.6	> 54
100.0	62.4	> 54
200.0	61.6	> 54
300.0	62.0	> 54
400.0	58.8	> 54
500.0	60.4	> 54
600.0	58.4	> 54
700.0	58.8	> 54
800.0	59.3	> 54
900.0	58.3	> 54
1000.0	55.8	> 54

Gain Flatness Measurement (For 1 GHz to 3 GHz Amp.)		
Freq. (GHz)	Reading (dB)	Expected (dB)
0.8	47.6	> 40
1.0	48.0	> 40
1.5	47.9	> 40
2.0	47.8	> 40
2.5	46.4	> 40
3.0	46.3	> 40

VSWR Measurement (input port)		
Freq. (MHz)	Actual (dB)	Hige Range (dB)
80.0	1.7	< 2.00
100.0	1.5	< 2.00
200.0	1.6	< 2.00
300.0	1.5	< 2.00
400.0	1.5	< 2.00
500.0	1.4	< 2.00
600.0	1.4	< 2.00
700.0	1.4	< 2.00
800.0	1.4	< 2.00
900.0	1.5	< 2.00
1000.0	1.4	< 2.00

Power Linearly Measurement								
Freq. (MHz)	Reading (Watts)	Standard (Watts)	Freq. (MHz)	Reading (Watts)	Standard (Watts)	Freq. (MHz)	Reading (Watts)	Standard (Watts)
80.0	20.0	23.2	200.0	200.0	226.9	800.0	100.0	97.7
80.0	50.0	63.9	200.0	250.0	279.7	800.0	150.0	147.2
80.0	100.0	122.4	500.0	20.0	21.3	800.0	200.0	196.1
80.0	150.0	173.4	500.0	50.0	52.6	800.0	250.0	244.9
80.0	200.0	234.7	500.0	100.0	103.8	1000.0	20.0	16.5
80.0	250.0	302.2	500.0	150.0	155.4	1000.0	50.0	45.2
200.0	20.0	22.4	500.0	200.0	206.8	1000.0	100.0	87.3
200.0	50.0	58.3	500.0	250.0	258.1	1000.0	150.0	131.9
200.0	100.0	107.6	800.0	20.0	19.1	1000.0	200.0	175.9
200.0	150.0	166.7	800.0	50.0	48.6	1000.0	250.0	220.0

Standard Power Measurement					
For 80 MHz to 1 GHz			For 800 MHz to 3 GHz		
Freq.	Expected (WATTS)	Standard (WATTS)	Freq.	Expected (WATTS)	Standard (WATTS)
80.0	> 250	348.0	0.8	> 30	30.3
100.0	> 250	335.0	1.0	> 30	34.2
200.0	> 250	340.0	1.5	> 30	39.9
300.0	> 250	329.0	2.0	> 30	36.7
400.0	> 250	324.0	2.5	> 30	34.0
500.0	> 250	282.0	3.0	> 30	34.3
600.0	> 250	318.0			
700.0	> 250	329.0			
800.0	> 250	306.0			
900.0	> 250	294.0			
1000.0	> 250	271.0			

Uncertainty: 3%

It has been demonstrated that the RS generator meets the specified requirements in the standard with at least a 95% confidence.

Electrical Fast Transient/Burst Immunity (EFT/BURST)
Voltage

Impedance	Voltage Setting(V)	Expected (V)	Actual (V)	Uncertainty (%)	T1	Uncertainty (%)	T2	Uncertainty (%)
50Ω	500	250	253	8.2	5.39	4.4	46.49	4.4
50Ω	1000	500	504	8.2	5.7	4.4	45.98	4.4
50Ω	2000	1000	971	8.2	5.57	4.4	44.89	4.4
50Ω	4000	2000	1972	8.2	5.38	4.4	46.07	4.4
50Ω	-500	-250	-248	8.2	4.66	4.4	88.31	4.4
50Ω	-1000	-500	-496	8.2	5.23	4.4	86.25	4.4
50Ω	-2000	-1000	-962	8.1	5.11	4.4	85.48	4.4
50Ω	-4000	-2000	-1960	8.2	5.04	4.4	87.83	4.4
1kΩ	500	500	476	8.2	5.81	4.4	87.87	4.4
1kΩ	1000	1000	933	8.2	5.42	4.4	88.38	4.4
1kΩ	2000	2000	1814	8.2	5.35	4.4	89.78	4.4
1kΩ	4000	4000	3674	8.2	5.98	4.4	85.91	4.4
1kΩ	-500	-500	-460	8.2	6.03	4.4	37.78	4.4
1kΩ	-1000	-1000	-918	8.2	6.24	4.4	36.86	4.4
1kΩ	-2000	-2000	-1777	8.2	6.16	4.4	37.23	4.4
1kΩ	-4000	-4000	-3599	8.2	6.42	4.4	37.53	4.4

EFT Repetition Frequency (Voltage @ 1 kV)

Setting (kHz)	Actual (kHz)	Uncertainty (%)	Tolerance (%)
5	5	4.4	20%
100	100.01	4.4	20%

Burst Duration (Voltage @ 1 kV)

Setting (ms)	Repetition Freq. (kHz)	Actual (ms)	Uncertainty (%)	Tolerance (%)
15	5	14.82	4.4	20%
0.75	100	0.74	4.5	20%

Burst Period (Voltage @ 1 kV)

Setting (ms)	Repetition Freq. (kHz)	Actual (ms)	Uncertainty (%)	Tolerance (%)
300	5	300	4.4	20%
300	100	300	4.4	20%

It has been demonstrated that the EFT/BURST generator meets the specified requirements in the standard with at least a 95% confidence.

Surge Immunity
Open Circuit Output Voltage Waveform check:

Impedance	Voltage Setting(V)	Actual (V)	Uncertainty (%)	T3	Uncertainty (%)	T4	Uncertainty (%)
L-N 2Ω	500.0	503.0	3.9	1.3	3.7	54.0	3.7
L-N 2Ω	4000.0	4020.0	3.9	1.2	3.7	51.2	3.7
L-N 2Ω	-500.0	-503.0	3.9	1.3	3.7	50.8	3.7
L-N 2Ω	-4000.0	-4068.0	3.9	1.1	3.7	50.3	3.7
L-G 2Ω	500.0	485.0	3.9	1.3	3.7	29.7	3.7
L-G 2Ω	4000.0	3948.0	3.9	1.0	3.7	28.2	3.7
L-G 2Ω	-500.0	-480.0	3.9	1.3	3.7	28.3	3.7
L-G 2Ω	-4000.0	-3900.0	3.9	1.1	3.7	28.0	3.7
N-G 2Ω	500.0	490.0	3.9	1.3	3.7	29.5	3.7
N-G 2Ω	4000.0	3900.0	3.9	1.2	3.7	27.9	3.7
N-G 2Ω	-500.0	-478.0	3.9	1.3	3.7	28.4	3.7
N-G 2Ω	-4000.0	-3900.0	3.8	1.2	3.7	28.2	3.7
Impulse	500.0	511.0	3.9	1.5	3.7	53.4	3.7
Impulse	1000.0	1041.0	3.9	1.3	3.7	51.9	3.7
Impulse	2000.0	2022.0	3.9	1.2	3.8	53.3	3.7
Impulse	4000.0	4044.0	3.9	1.3	3.6	53.3	3.7
Impulse	-500.0	-503.0	3.9	1.5	3.7	52.6	3.7
Impulse	-1000.0	-1023.0	3.9	1.3	3.7	51.9	3.7
Impulse	-2000.0	-2022.0	3.9	1.2	3.7	51.4	3.7
Impulse	-4000.0	-4044.0	3.9	1.3	3.7	51.4	3.7

Short Circuit Output Voltage Waveform check:

Impedance	Voltage Setting(V)	Actual (V)	Uncertainty (%)	T5	Uncertainty (%)	T6	Uncertainty (%)
L-N 2Ω	500.0	231.0	2.5	7.7	2.1	19.6	2.1
L-N 2Ω	4000.0	1854.0	2.5	7.4	2.1	19.9	2.1
L-N 2Ω	-500.0	-228.0	2.5	7.7	2.1	19.8	2.1
L-N 2Ω	-4000.0	-1818.0	2.5	7.6	2.1	19.9	2.1
L-G 2Ω	500.0	42.0	3.0	2.6	2.1	25.3	2.1
L-G 2Ω	4000.0	326.0	2.5	2.5	2.1	25.1	2.1
L-G 2Ω	-500.0	-42.0	2.8	2.6	2.1	25.0	2.1
L-G 2Ω	-4000.0	-337.0	2.5	2.4	2.1	25.0	2.1
N-G 2Ω	500.0	41.0	3.0	2.8	2.1	26.4	2.1
N-G 2Ω	4000.0	325.0	2.5	2.7	2.1	25.9	2.1
N-G 2Ω	-500.0	-41.0	2.7	2.9	2.1	26.1	2.1
N-G 2Ω	-4000.0	-323.0	2.5	2.6	2.1	25.8	2.1
Impulse	500.0	243.0	2.5	6.8	2.1	22.2	2.1
Impulse	1000.0	494.0	2.5	6.9	2.1	22.3	2.1
Impulse	2000.0	999.0	2.5	6.8	2.1	22.3	2.1
Impulse	4000.0	2022.0	2.5	7.1	2.1	22.3	2.1
Impulse	-500.0	-251.0	2.5	7.2	2.1	22.6	2.1
Impulse	-1000.0	-497.0	2.5	7.0	2.1	22.3	2.1
Impulse	-2000.0	-987.0	2.5	6.9	2.1	22.3	2.1
Impulse	-4000.0	-1986.0	2.5	7.0	2.1	22.4	2.1

It has been demonstrated that the Surge generator meets the specified requirements in the standard with at least a 95% confidence.

Conducted Disturbances Induced by Radio-Frequency Field Immunity (CS)

RF Frequency Measurement Check			RF Generator AM Modulation Measurement Check (1 kHz ; 80 %)			
Reading	Standard	RF Generator Second Harmonic Check Harmonic (dBc)	Frequency	Mod. Freq.	Reading	Standard
9.000 kHz	8.99997282 kHz	-45.6	100.000 kHz	1 kHz	80.0%	81.4%
50.000 kHz	49.998570 kHz	-42.3	1.000000 MHz	1 kHz	80.0%	81.3%
100.000 kHz	99.9997118 kHz	-43.5	5.000000 MHz	1 kHz	80.0%	81.2%
1.000000 MHz	0.999997073 MHz	-45.6	10.000000 MHz	1 kHz	80.0%	81.1%
5.000000 MHz	4.99998552 MHz	-47.8	50.000000 MHz	1 kHz	80.0%	81.3%
10.000000 MHz	9.99997043 MHz	-48.4	100.000000 MHz	1 kHz	80.0%	81.1%
50.000000 MHz	49.9998556 MHz	-47.1	500.000000 MHz	1 kHz	80.0%	81.5%
100.000000 MHz	99.9997100 MHz	-46.2	1000.000000 MHz	1 kHz	80.0%	80.8%
500.000000 MHz	499.998548 MHz	-49.9				
1000.000000 MHz	999.997093 MHz	-52.6				

RF Generator Response and Accuracy Measurement Check			RF Power Meter Measurement Check			
Frequency	Reading (dBm)	Standard (dBm)	Frequency (MHz)		Standard (dBm)	Reading (dBm)
9.000 kHz	0	-43.0	CH 1	50	10	9.7
50.000 kHz	0	0.0	CH 1	50	0	-0.3
100.000 kHz	0	-0.1	CH 1	50	-10	-10.3
1.000000 MHz	0	0.1	CH 1	50	-15	-15.3
5.000000 MHz	0	0.1	CH 2	50	10	9.7
10.000000 MHz	0	0.1	CH 2	50	0	-0.3
50.000000 MHz	0	-0.2	CH 2	50	-10	-10.3
50.000000 MHz	-10	-10.2	CH 2	50	-15	-15.3
50.000000 MHz	-20	-20.3	CH 3	50	10	9.7
50.000000 MHz	-30	-30.3	CH 3	50	0	-0.4
50.000000 MHz	-40	-40.3	CH 3	50	-10	-10.3
50.000000 MHz	-50	-50.3	CH 3	50	-15	-15.3
100.000000 MHz	0	0.1				
500.000000 MHz	0	0.0				
1000.000000 MHz	0	-0.3				

Power Amplifier Gain Flatness Measurement		Power Amplifier Standard Measurement (Input: 10 dBm)		Power Amplifier Second Harmonic Measurement Check
Frequency	Reading (dB)	Result (dBm)	Spec. (dBm)	Reading (dBc)
150.000 kHz	50.1	48.1	> 44.77	-48.6
1.000000 MHz	51.2	48.3	> 44.77	-47.8
5.000000 MHz	51.2	48.4	> 44.77	-53.6
10.000000 MHz	51.1	48.4	> 44.77	-48.7
50.000000 MHz	50.4	48.4	> 44.77	-49.2
100.000000 MHz	49.6	48.2	> 44.77	-44.7
200.000000 MHz	49.4	47.0	> 44.77	-54.3
2300.000000 MHz	49.6	46.4	> 44.77	-57.5

Uncertainty: Frequency: 1.9×10^{-9}

Linear: 0.9 dB

RF Power Level: 1.2 dB

Harmonic: 2.0 dB

It has been demonstrated that the CS generator meets the specified requirements in the standard with at least a 95% confidence.

Power Frequency Magnetic Field Immunity
AC Current Accuracy Check

Freq.(Hz)	Range (A)	Standard (A)	Reading (A)	Uncertainty (%)
50	0~10	1.003	1	0.3
50	0~10	3.002	3	0.3
50	0~10	5.006	5	0.3
50	0~10	10.008	10	0.3
50	10~125	9.92	10	0.3
50	10~125	30.01	30	0.3
50	10~125	50.08	50	0.3
50	10~125	100.2	100	0.3
60	0~10	0.989	1	0.3
60	0~10	2.985	3	0.3
60	0~10	4.988	5	0.3
60	0~10	9.982	10	0.3
60	10~125	9.89	10	0.3
60	10~125	29.92	30	0.3
60	10~125	49.93	50	0.3
60	10~125	100.03	100	0.3

Magnetic Measurement Check : (@50Hz)

Range (A)	Standard (A/m)	Reading (A)	Uncertainty (%)
0~10	1	1.0	1
0~10	3	3.2	1
0~10	10	10.8	1
10~125	10	11.1	1
10~125	30	33.1	1
10~125	100	109.8	1

It has been demonstrated that the PFMF the specified requirements in the standard with at least a 95% confidence.

Voltage Dips and Voltage Interruptions Immunity**PQF Measurement: (Input Voltage: 230V/50Hz)**

Level	Load	Actual (V)	Uncertainty (mV/V)	Tolerance (%)
80%	100Ω	182.5	17	184 +/- 5%
70%	100Ω	161.7	17	161 +/- 5%
40%	100Ω	93.2	17	92 +/- 5%
0%	100Ω	5.3	17	-

VAR Check: (Input Voltage: 230V/50Hz)

Level	Load	Actual (V)	Uncertainty (mV/V)	Tolerance (%)
80%	100Ω	182.5	17	184 +/- 5%
70%	100Ω	161.7	17	161 +/- 5%
40%	100Ω	93.2	17	92 +/- 5%
0%	100Ω	5.3	17	-

It has been demonstrated that the Dip generator meets the specified requirements in the standard with at least a 95% confidence.

Appendix A. Test Photos

1. Photographs of Conducted Emissions Test Configuration

Applicable Standard: EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011

FRONT VIEW



REAR VIEW



Applicable Standard: EN 55032:2015/AC:2016

FRONT VIEW



REAR VIEW



2. Photographs of Telecommunication Line Conducted Emissions Test Configuration

Applicable Standard: EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011

Test Mode: Mode 3 and Mode 4

FRONT VIEW



REAR VIEW



Test Mode: Mode 7

FRONT VIEW



REAR VIEW



Applicable Standard: EN 55032:2015/AC:2016

Test Mode: Mode 1, Mode 2

FRONT VIEW



REAR VIEW



Test Mode: Mode 3

FRONT VIEW



REAR VIEW




3. Photographs of Radiated Emissions Test Configuration

Applicable Standard: EN 301 489-1 V1.9.2 (2011-09) and EN 55022:2010/AC:2011


Test Mode: Mode 1

Test Configuration: 30MHz~1GHz

FRONT VIEW

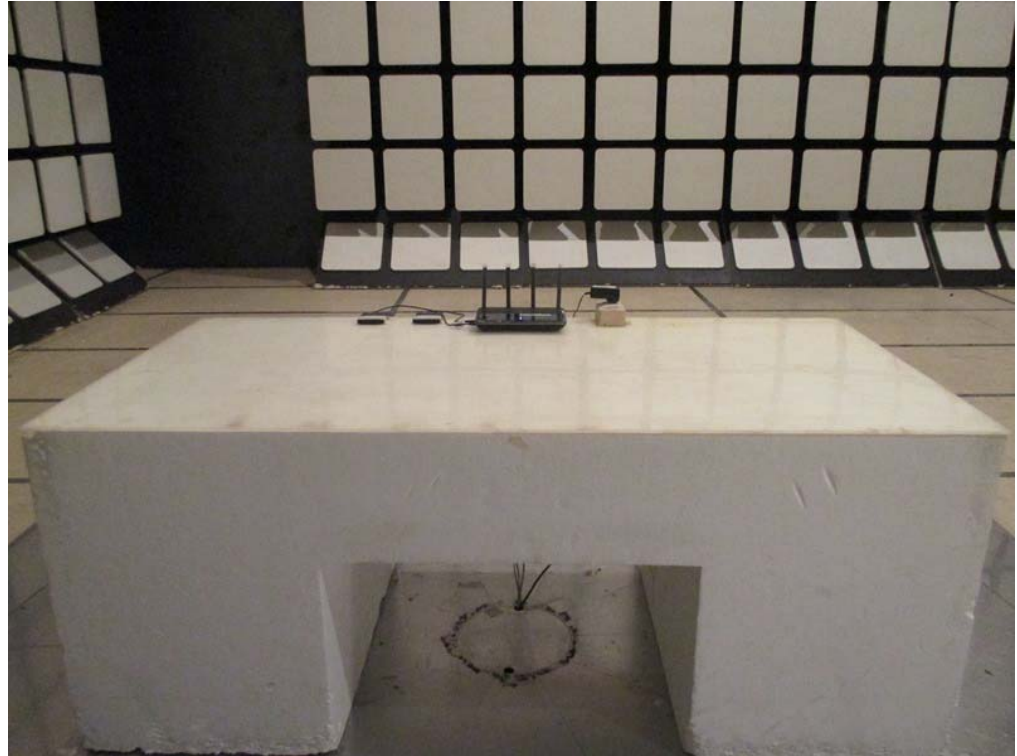

REAR VIEW

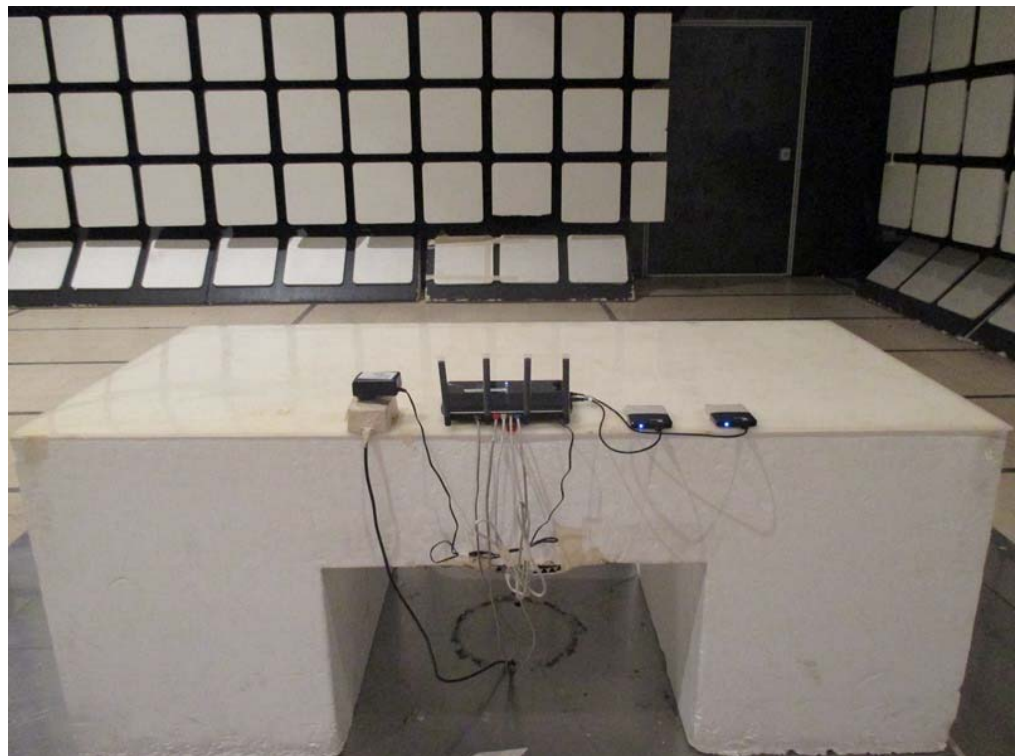


Test Configuration: Above 1GHz

FRONT VIEW



REAR VIEW

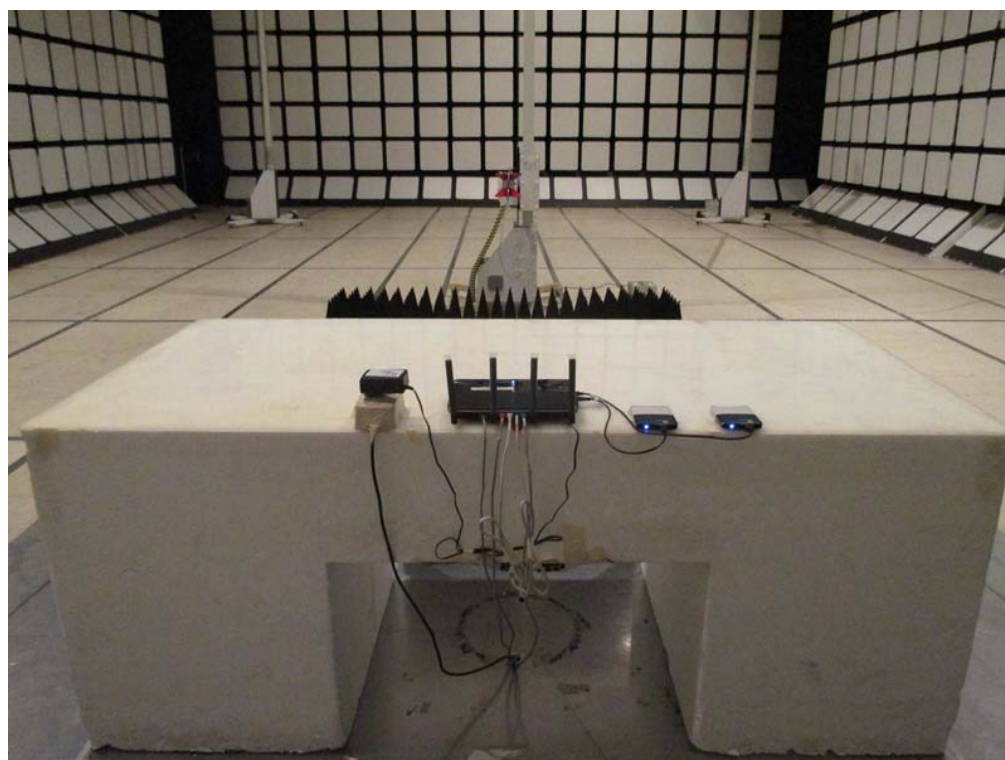


Applicable Standard: EN 55032:2015/AC:2016

Test Configuration: 30MHz~1GHz

FRONT VIEW



REAR VIEW

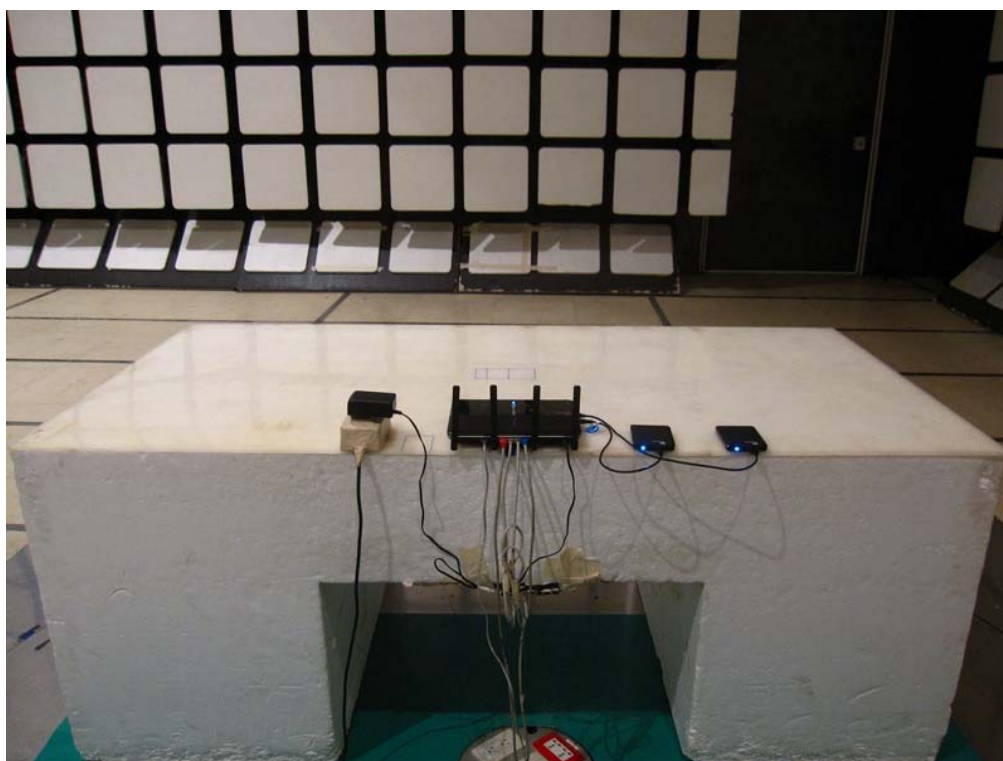


Test Configuration: Above 1GHz

FRONT VIEW



REAR VIEW

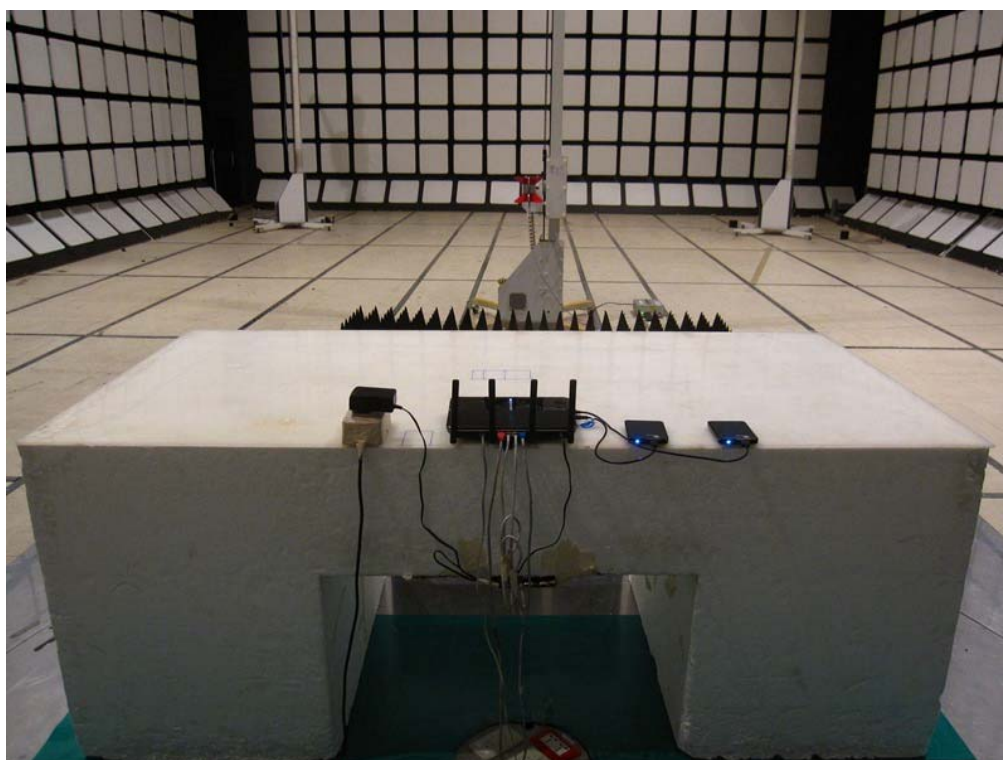


4. Photographs of Harmonic, Flicker Test Configuration

FRONT VIEW



5. Photographs of ESD Immunity Test Configuration

FRONT VIEW

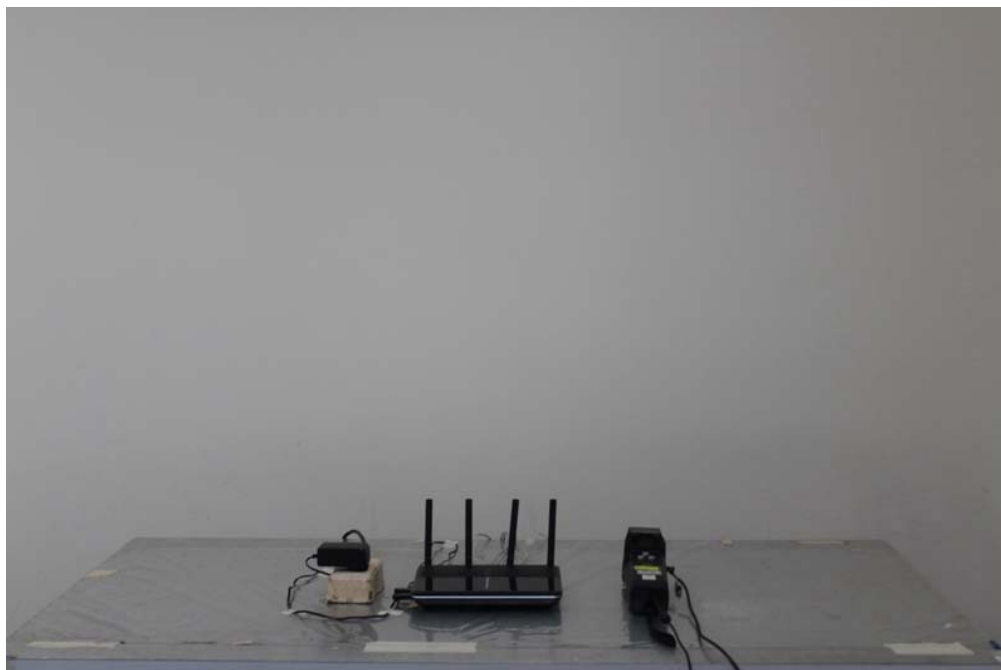


REAR VIEW




6. Photographs of RS Immunity Test Configuration

FRONT VIEW

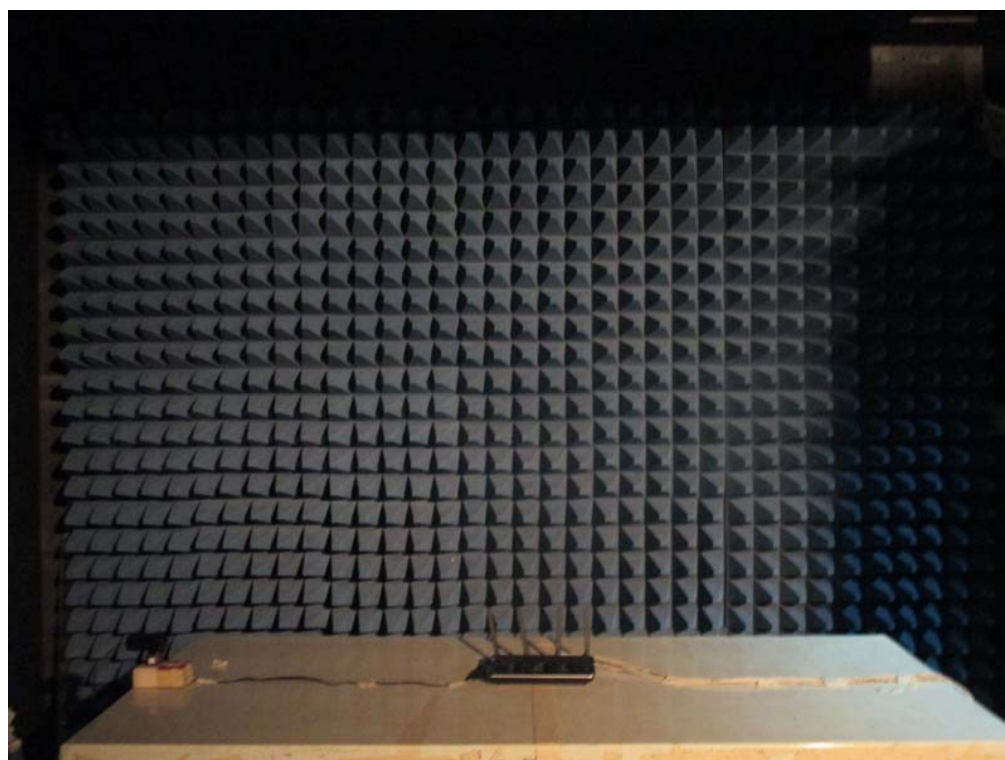

REAR VIEW

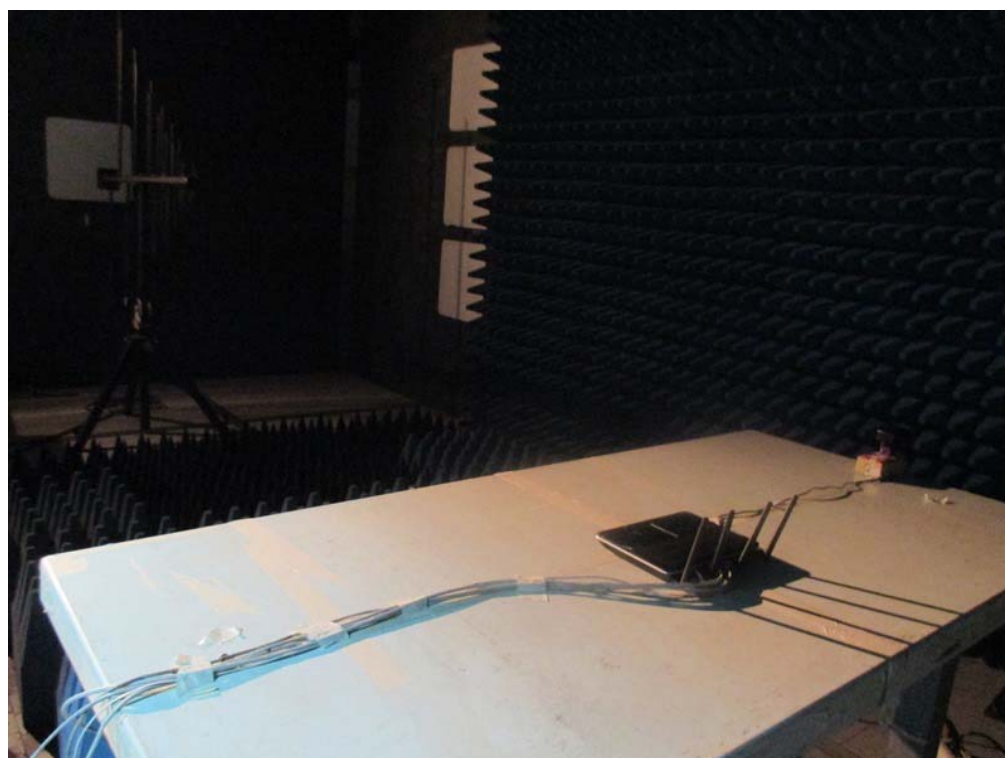


7. Photographs of EFT Test Configuration

FRONT VIEW




REAR VIEW

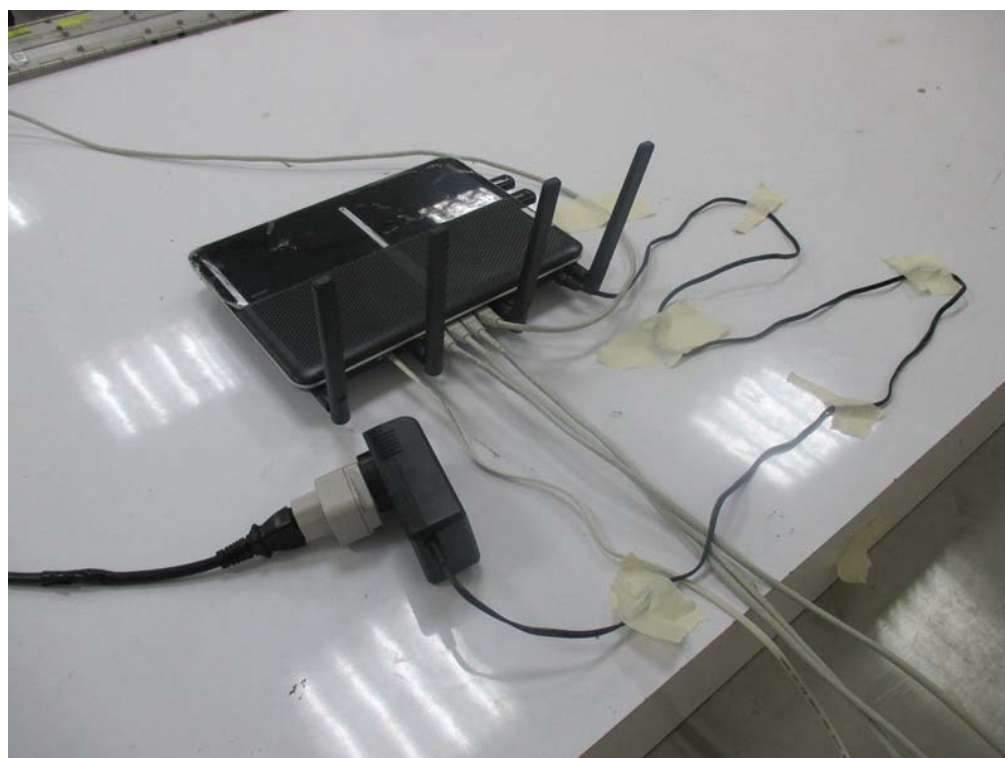

8. Photographs of Surge Test Configuration

FRONT VIEW

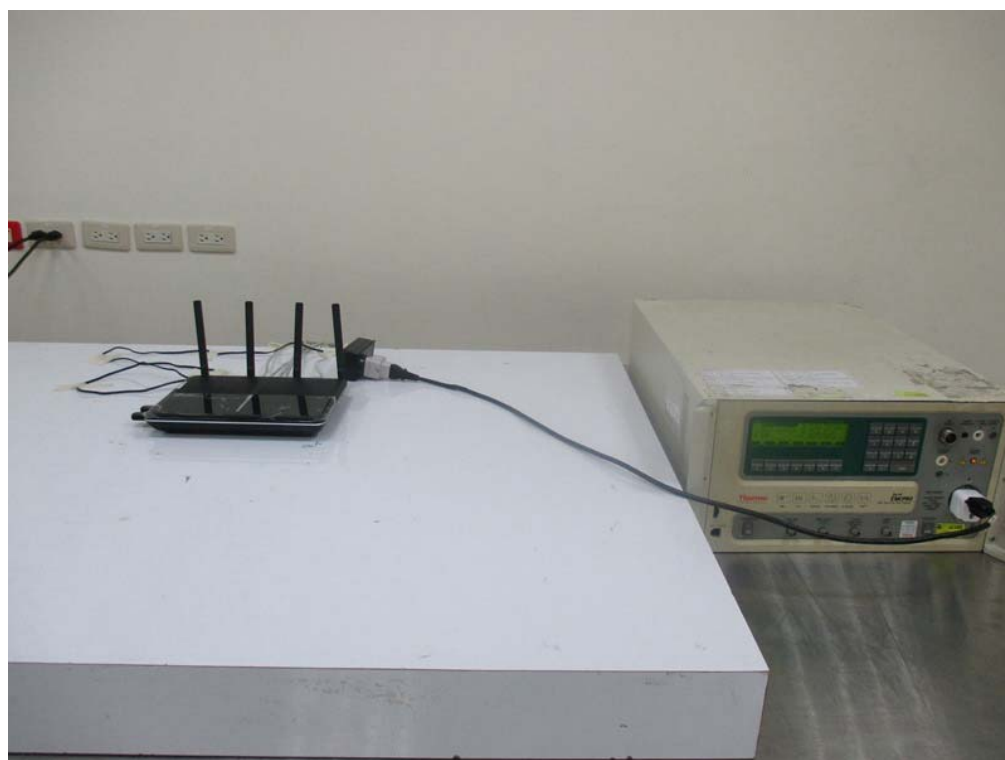

9. Photographs of CS Immunity Test Configuration

FRONT VIEW




REAR VIEW



10. Photographs of MF Immunity Test Configuration

FRONT VIEW

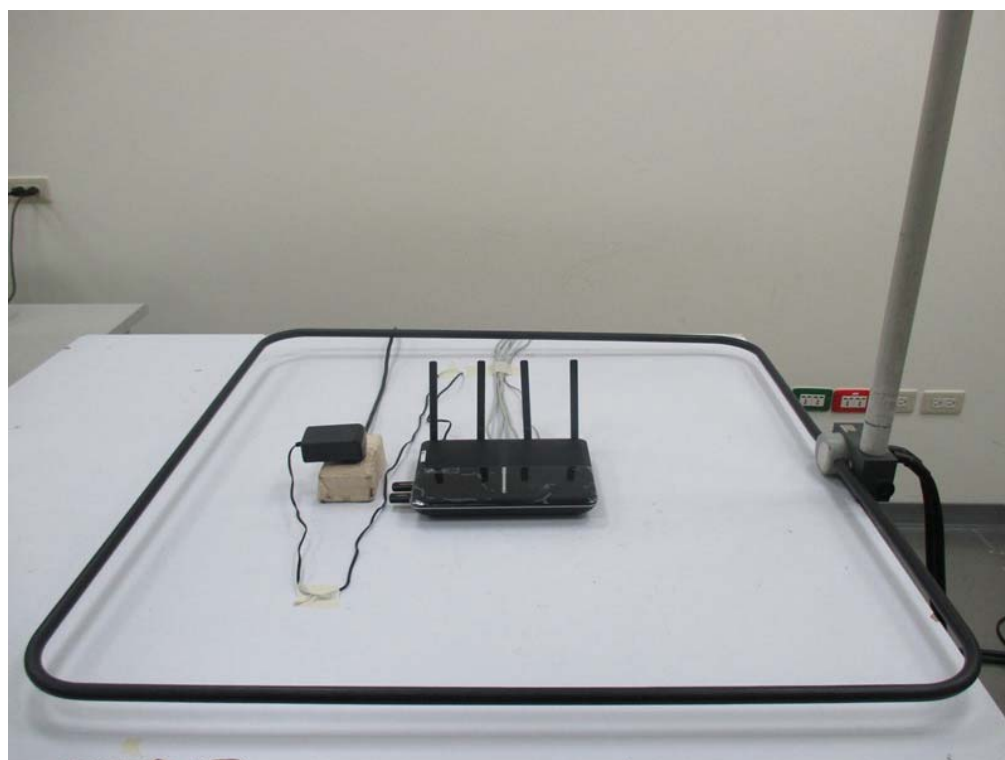

11. Photographs of DIP Test Configuration

FRONT VIEW

