

Product Codes

114616 - 2100mm [to suit 44mm door]

119211 - 2400mm [to suit 44mm door]

Description

This solution is ideal for doors that need to swing 90° in both directions [180°] and eliminates the possibility of pivot doors splitting on impact. It provides an ideal solution for busy corridor doors which are exposed to impact damage.



Testing

- Performance Tested to European Standard BS EN:1953
- Tested to DHF TS 001:2013 B4 [0.5mm wire test]

Maintenance and Cleaning

The Double Swing Hinge operates by a number of interlocking gears that provide high strength and smooth motion. They require minimal maintenance, by following the procedures below on a quarterly basis the product will perform effectively.

- Check the gears are free from dust/debris.
- Check the bearings are free from cracks.
- Check all fixings are present and tightened sufficiently.
- If dirty wipe down with warm soapy water.
- Check for any sharp edges caused by impact damage and file smooth if necessary.

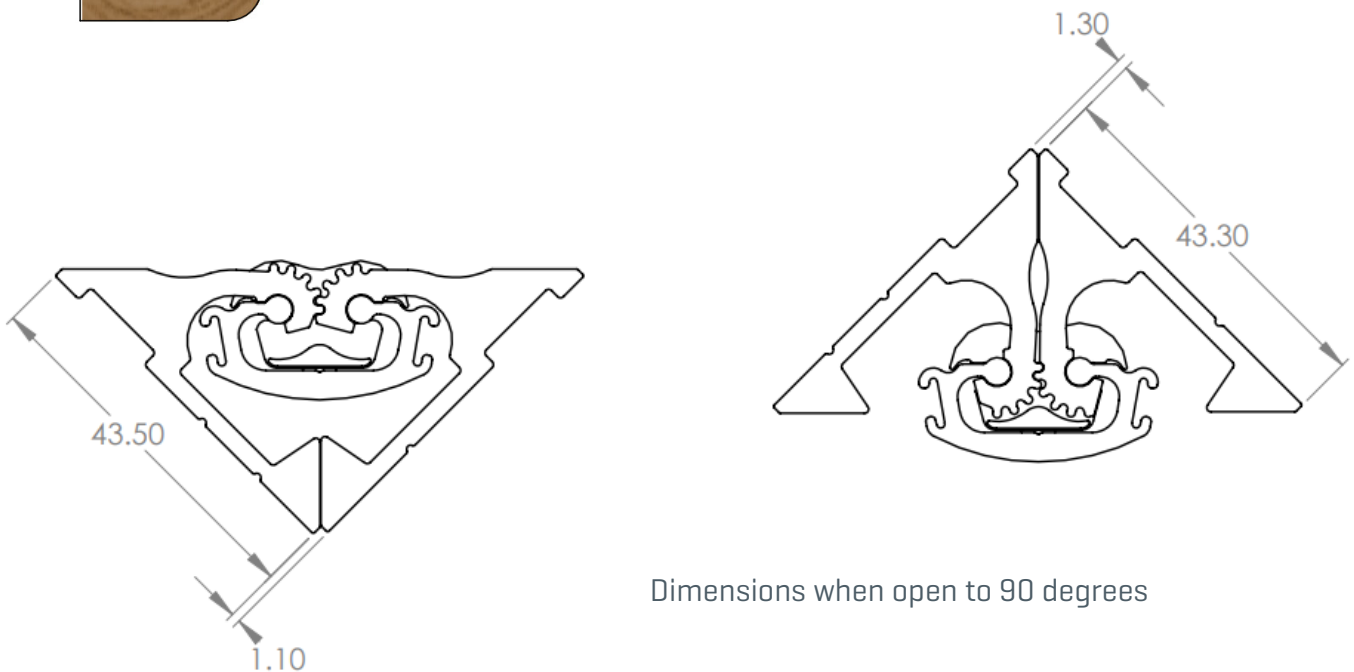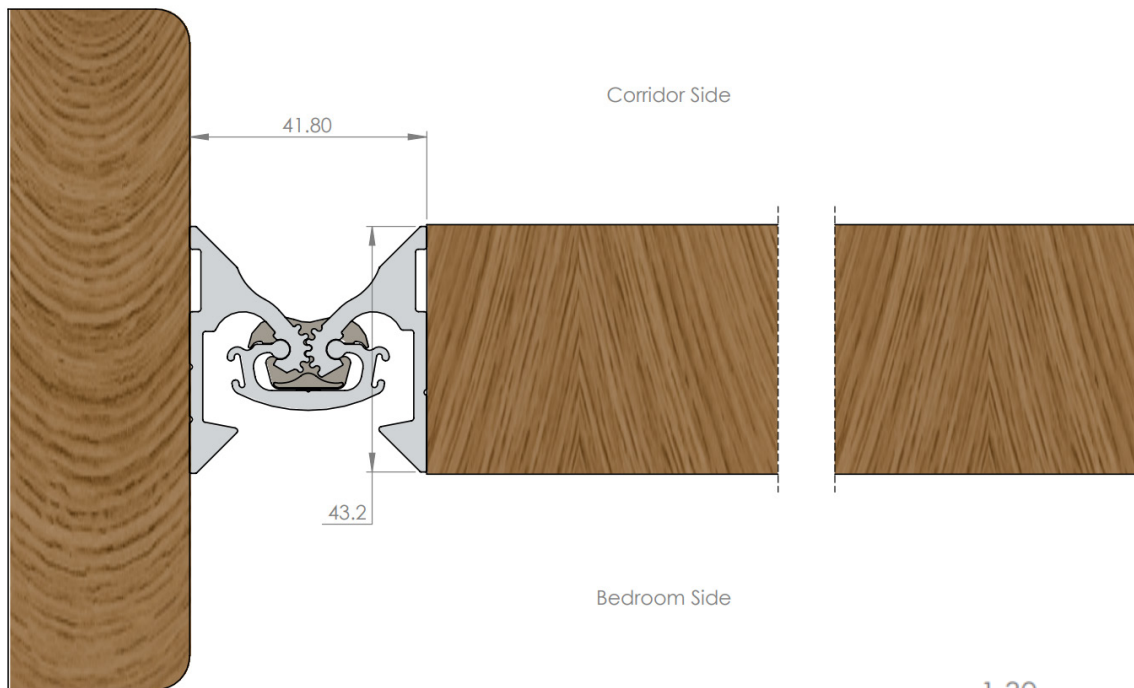

ABOUT HIPAC

We are an Australian healthcare company that guarantees to stand behind all our medical products, both manufactured and imported, because we're here for the life of our products and clients.

PO Box 797, 36 Long St. Goulburn NSW 2580, Australia
P. +61 2 4823 0000 E. info@hipac.com.au

SYDNEY | MELBOURNE | BRISBANE | ADELAIDE | PERTH

hipac.com.au

ABN 27 600 353 688