

# Multiple Battery Charger • Models CHG 3512 and CHG 3512 PRO


## Description:

This multi-unit, drop-in style charger will conveniently store and charge up to 12 Williams Sound R35, R35-8, R863, RX22-4 receivers, or T863 transmitters over the course of a 16 hour time span. It helps keep your products organized and saves cost on having to replace alkaline batteries.

## CHG 3512, CHG 3512 PRO Multiple Battery Charger:

CHG 3512: <i>(charger only)</i>	Size: 9.5"L x 7.4"W x 1.7"H (24.1 cm L x 18.8 cm W x 4.3 cm H) Weight: 1.2 lbs (.54 kg), excluding power supply
CHG 3512 PRO: <i>(charger in case)</i>	Size: 18"L x 14"W x 6.75"H (45.7 cm L x 35.5 cm W x 17.1 cm H) Weight: 10 lbs (4.53 kg)
Color:	Black ABS
Power Supply Input:	90 - 240 VAC input
Power Supply:	TFP 037 Switching AC adapter, 5 VDC - 4A output
Charging Rate:	16 Hour Charge: 140 mA Pulse/Maintain: 140 mA
Charging Time:	16 hours nominal
Unit Capacity:	12 Units
Indicators:	Individual Charging Indicators: Red LEDs. LEDs blink when batteries are charged
Warranty:	1 year (cables and power supply warranted for 90 days)
Approvals:	CE, WEEE, RoHS
Note:	Charging specifications are based on Williams Sound Corp. rechargeable NiMH battery, BAT 026 (1400 mAh)

CHG 3512: Charger only  
CHG 3512 PRO: Charger in case

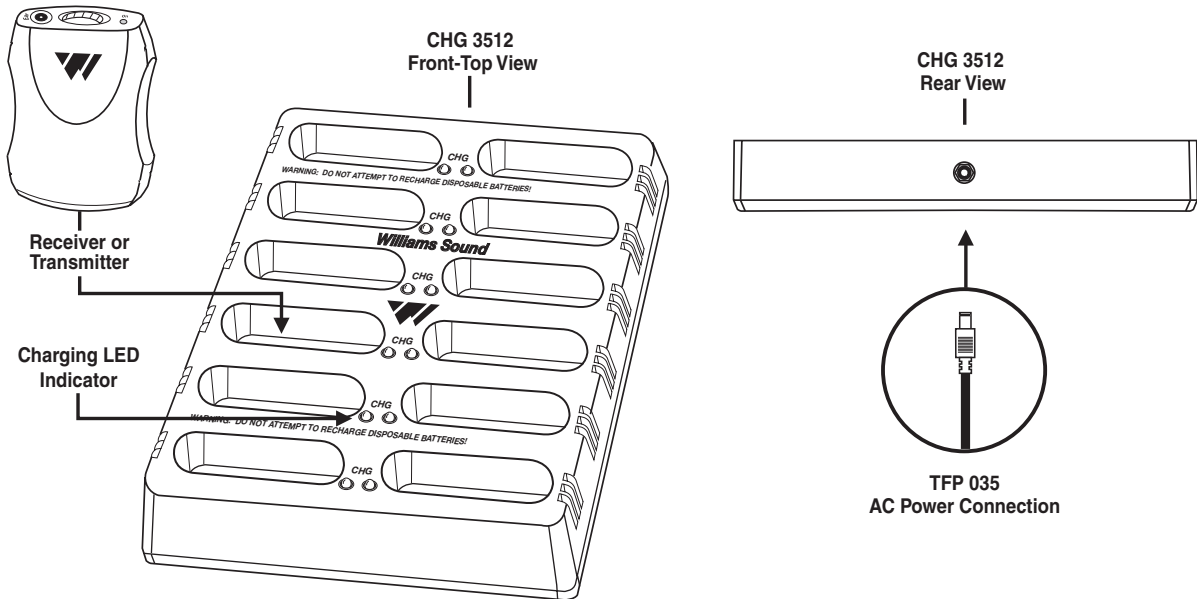

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Multiple Battery Charger • Models CHG 3512 and CHG 3512 PRO

## Bid Specs:

The CHG 3512 shall be a 12 unit drop-in battery charger and shall charge a maximum of 24 AA size NiMH batteries while they are installed into the Williams Sound Corp. PPA R35, PPA R35-8, R863, RX22-4 style 3V receivers or T863 style 3V transmitter.

The charger CHG 3512 shall be microprocessor controlled and enclosed in ABS plastic measuring 9.5" L x 7.4" W x 1.7" H (24.1cm L x 18.8cm W x 4.3cm H). The CHG 3512 unit shall weigh 1.2 lbs (2.64 Kg) without power supply, 2.9lbs (6.4 Kg) shipping weight. In the optional carry case, the charger shall weigh 10 lbs (4.53 kg).

The charger shall be a timed charger at 16 hours, and will provide a maintain charge once the timer has completed its charging cycle. Each bay on the charger shall have a red LED indicating charging status. The LEDs shall be on constantly on during charging and will blink indicating when batteries are fully charged.

The charger CHG 3512 shall be powered by an external switching power supply (90-240 VAC input; 5 VDC, 4A output) via a CD barrel connector.

The charger shall have CE approval, and be compliant with RoHS and WEEE regulations.

The charger shall be the Williams Sound Corp. model CHG 3512.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Multiple Battery Charger • Models CHG 3512 and CHG 3512 PRO

Multiple Battery Charger • Models CHG 3512 and CHG 3512 PRO

## Contact:

### United States

Williams Sound Corp.  
10321 W. 70th Street  
Eden Prairie, MN 55344  
Ph: 800-328-6190 / 952-943-2252  
FAX: 952-943-2174  
Email: [info@williamssound.com](mailto:info@williamssound.com)  
Web: [www.williamssound.com](http://www.williamssound.com)

### Canada

Thorvin Electronics  
2861 Sherwood Heights Dr. Units 36-37  
Oakville, ON L6J-7K1 Canada  
Ph: 800-323-6634 / 905-829-3040  
FAX: 905-829-4196  
Web: [www.thorvinelectronics.com](http://www.thorvinelectronics.com)

### South America

DPTEch  
SIA Trecho 3/4 Lote 335 2°. Andar  
71200-030 Brasília, DF  
BRAZIL  
Phone: (5561) 361-1384  
Fax: (5561) 361-0948  
Web: [www.dpotech.com.br](http://www.dpotech.com.br)  
Email: [ws@dpotech.com.br](mailto:ws@dpotech.com.br)

### United Kingdom

Sound Associates  
Keeble House, 81 Island Farm Road  
West Molesey, Surrey KT 2SA  
United Kingdom  
Phone: (44) 020 8939 5900  
Fax: (44) 020 8939 5901  
Web: [www.soundassociates.co.uk](http://www.soundassociates.co.uk)  
Email: [jmurdoch@soundassociates.com](mailto:jmurdoch@soundassociates.com)

### Asia, Europe, Australia, Latin America, Middle East, South Africa

International Sales Department  
Williams Sound Corp.  
10321 W. 70th Street  
Eden Prairie, MN 55344 USA  
Phone: +1 952 224 7791  
Fax: +1 952 943 2174  
Email: [info@williamssound.com](mailto:info@williamssound.com)  
Web: [www.williamssound.com](http://www.williamssound.com)

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!