


keji

Model: PB05BK
5000mAh Dual Port Power Bank



User Manual v1.3

Power Bank Layout

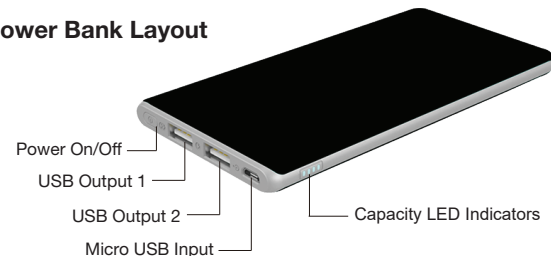

Features

- Suitable for iPhone/iPad/iPod
- Suitable for most smartphones and tablets including Samsung Huawei, Google, LG, Motorola, Sony, Oppo, Xiaomi, OnePlus
- Ideal for smartwatches, wearables, cameras and headphones
- Battery type: Lithium-Polymer
- 5000mAh provides 180% extra battery for an average smartphone*
- Get an extra 12 hours of web surfing on an iPhone X or 10 hours on a Samsung Galaxy S10
- Dual USB outputs for simultaneous charging of 2 devices
- 2A high output for fast charging of iPad or tablet
- Rechargeable more than 500 times
- Includes 30cm micro USB cable to charge power bank
- Built-in over charging and short circuit protection
- Watt Hour Rating: 18.5Wh
- Micro USB Input: DC 5V 2A
- USB Output 1: DC 5V 2A
- USB Output 2: DC 5V 2A
- Total Output: DC 5V 2A (10W)
- Charging Time: 4 to 6 hours depending on charger output
- Size: 134mm (L) x 67.6mm (W) x 10mm (H)
- Weight: 120g
- Certifications: RCM, RoHS, UN38.3

Charging the Power Bank

- Using the included micro USB cable, connect the larger USB-A connector to a USB wall charger
- Connect the smaller micro USB connector to the input port on the power bank
- During charging the LED indicators will flash to show charging status
- When charging is complete the LED indicators will remain on

Charging a Phone or USB Device

- Using your phone or other USB device's charging cable, connect the USB-A connector to either output 1 or output 2 port on the power bank
- Connect the other end of the cable to your device
- Charging should commence automatically
- If charging doesn't start, press the On/Off button to start charging
- If your phone or device uses a standard micro USB port, then you can also use the included cable to charge your device
- When your phone or device is fully charged, the power bank will automatically turn itself off

Checking Remaining Capacity

- Press On/Off button and LEDs will show remaining capacity
- The LEDs will turn off automatically after about 5 seconds

LED ● On / ○ Off / ● Flashing	Remaining Capacity
● ○ ○ ○	Less than 5%
● ○ ○ ○	5% to 25%
● ● ○ ○	25% to 50%
● ● ● ○	50% to 75%
● ● ● ●	75% to 100%

CAUTION

- Do not drop, misuse or apply excessive force to your power bank. Power banks contain batteries and a circuit board with fragile components that can be damaged if misused. If you drop or damage your power bank, discontinue use immediately.
- If crushed, punctured, exposed to fire or high temperatures or disassembled, batteries may catch fire, explode or cause burns.
- If your power bank swells or bulges, stop use immediately and dispose of the power bank in an appropriate manner. Continued use may cause the power bank to catch fire or explode.
- Do not charge the power bank and your device at the same time. It may cause the power bank to overheat.
- Store power bank in a cool and dry place. Do not store in hot or humid environments. Eg. In a car or directly in the sun.
- Power bank usage by children should be supervised.
- Do not put your power bank in a handbag, backpack or other bag where small metal objects can cause a short circuit.
- Do not dispose of power bank in heat or fire.
- All Comsol power banks have safety power cut off features to stop overcharging & overheating. However, we recommend disconnecting the power bank once it is fully charged and removing all cables.
- When charging a device, the power bank may feel warm, this is a normal operating condition & should not be cause for concern.
- In normal conditions, battery performance will decline over several years.
- Operating temperature should be between 10°C to 45°C.

iPhone, iPad and iPod are trademarks of Apple Inc., registered in the U.S. and other countries.

* 180% based on iPhone 8 with battery capacity of 1821mAh



Made in China