


2 WAY SPLITTER

SAT2SPPFS BC15482S

Selected Hills splitters are suitable for free to air Antenna and approved for PAY TV Satellite installs, depending on the frequency range.

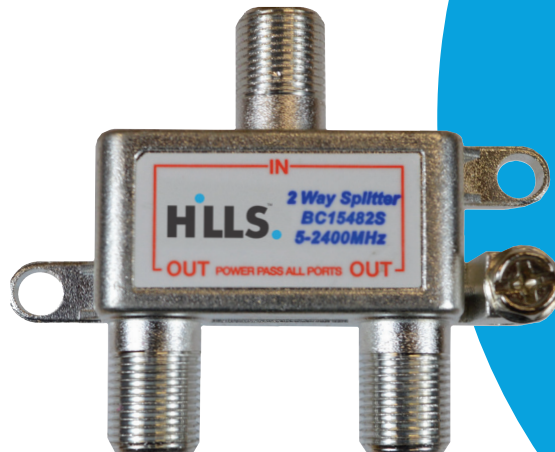

Key features

- Zinc die cast housing for mounting robustness and improved shielding
- F-Type connection for reliable use

Specifications

| ITEM | FREQUENCY (MHz) | TYPICAL (dB) | Q.C. LIMIT (dB) |
|------------------------|-----------------|--------------|-----------------|
| INSERTION LOSS (MAX.) | 5-40 | 3.6 | 3.8 |
| | 40-950 | 4.2 | 4.4 |
| | 950-1450 | 4.5 | 4.8 |
| | 1450-2150 | 5.0 | 5.5 |
| | 2150-2400 | 5.5 | 6.0 |
| ISOLATION. (MIN.) | 5-40 | 18 | 15 |
| | 40-950 | 20 | 18 |
| | 950-1450 | 22 | 20 |
| | 1450-2150 | 22 | 20 |
| | 2150-2400 | 22 | 20 |
| RETURN LOSS IN (MIN.) | 5-40 | 15 | 13 |
| | 40-950 | 15 | 13 |
| | 950-1450 | 17 | 15 |
| | 1450-2150 | 17 | 15 |
| | 2150-2400 | 15 | 13 |
| RETURN LOSS OUT (MIN.) | 5-40 | 14 | 12 |
| | 40-950 | 25 | 20 |
| | 950-1450 | 20 | 16 |
| | 1450-2150 | 18 | 15 |
| | 2150-2400 | 14 | 12 |
| DC PASS | IN-OUT | | NO |
| | OUT-OUT | | NO |
| | OUT-IN | | YES |

FOXTEL APPROVAL NUMBER F30091