



480 | 530 Specification sheet





ENGINES
CF 480 MX-13 (330 kW / 483 hp)
CF 530 MX-13 (390 kW / 530 hp)

GVM	GCM
25,200 kg	70,000 kg
Max. front 7,100 kg	
Max. rear 18,100 kg	





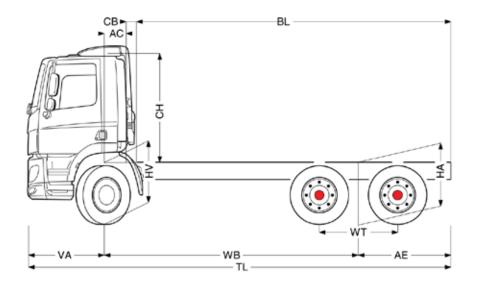

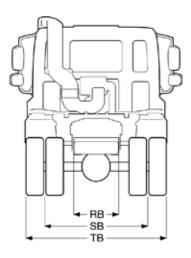

	Wheelb	ase – AE	Un	laden Weigl	nt¹)			Variable D	imensions		
	WB	AE	Front	Rear	Total	AC	BL	CH ²⁾	TL	HA ³⁾	HA ⁴⁾
DAY	6.00	3.60	4835	3790	8625	0.39	9.03	1.94	10.97	1.05	1.03
	WB	AE	Front	Rear	Total	AC	BL	CH ²⁾	TL	HA ³⁾	HA ⁴⁾
SLEEPER	6.00	3.60	4846	3790	8636	0.82	8.62	1.94	10.97	1.05	1.03
	WB	AE	Front	Rear	Total	AC	BL	CH ²⁾	TL	HA ³⁾	HA ⁴⁾
SPACE	6.00	3.60	4980	3790	8770	0.82	8.62	2.62	10.97	1.05	1.03

OTHER DIMENSIONS VA: 1.37 WT: 1.40 HV[®]: 1.04 HV[®]: 1.01 RB: 0.79 SB: 1.84 TB⁷: 2.46

- Chassis and cab weight calculated with: Standard specification items only, less fuel, AdBlue and driver, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- 2. Cab height is measured from frame member to closed cab roof hatch. With air intake on cab roof; add 0.21 m.
- 3. Unladen height at centre of driven axle(s).
- Laden height at centre of driven axle(s).
 Unladen height at centre of front axle(s).
- 6. Laden height at centre of front axle(s).
- 7. TB is overall width at rear.

Note: All dimensions are in metres (m) and weights in kilograms (kg).

CAB EXTERIOR

Sleeper Cab with galvanised steel bumper, tinted glass and electric window openers; Cab width 2300 mm; External sun visor green translucent; LED head lights; Fog lights and cornering lights; Main mirrors and wide angle mirrors electrically heated and adjustable. Air horns (dual set with Space Cab), Skylights with Space Cab.

Optional

Day Cab

Space Cab

AERODYNAMICS

- Adjustable roof deflector, wide, for Sleeper Cab
- · Side collars
- Adjustable roof deflector, wide, for Space Cab

COLOURS

Cab colour M8870 White; Head lamp panel and bumper colour M8870 White; Chassis colour black.

Optional

· Other cab colours available

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat Luxury Air; Co-driver seat Basic; Lower bunk mattress; Automatic Temperature Control; Roof hatch aluminium, manual control; Pollen filter. Refrigerator (Sleeper and Space cab only).

Optional

- · Leather steering wheel
- Exclusive cab interior trim colour
- Driver Seat: Xtra Leather Air (Exclusive interior only)
- Passenger Seat: Xtra Leather Air (Exclusive interior only)
- Third Seat (Day Cab only)
- Upper Bunk (Space Cab only)

COMMUNICATION AND DRIVING MANAGEMENT

AM/FM Premium Multimedia System with phone, navigation and telematics functionality, 2x GSM antennas, 1 x GPS antenna, 1 x DAB radio antenna.

SAFETY AND SECURITY

Adaptive Cruise Control (ACC); Forward Collision Warning (FCW); Advanced Emergency Braking System (AEBS); Lane Departure Warning System (LDWS); Vehicle Stability Control (VSC); Protective cab suspension and construction; Air bag (driver) and 2 seat belt tensioners; Reverse warning; Basic engine immobiliser system.

SUSPENSION AND AXLES

Front: 1x 7,100 kg parabolic leaf springs.

Rear: 2x 9,050 kg, air suspension, SR1360T, Axle load monitoring.

WHEELS AND TYRES

Front axle 1: 295/80R22.5; Rear axle 1: 11R22.5; Rear axle 2: 11R22.5; Alcoa Brushed alloy wheels.

Optional

· Alcoa Dura-Bright alloy wheels

DRIVELINE

Engine MX-13, multi torque 6 cylinder diesel engine, 12.9 litres. Output 480 hp at 1,600 rpm, maximum torque 2,500 Nm at 900-1,125 rpm, Exhaust emission Euro 6, 5 minute engine idle shut down, ZF TraXon Automated gearbox, 12 speeds, Gearbox ratio 12.92-0.77, rear axle ratio 3.40, ASR.

Optional

- Engine; 530 hp / 2,600 Nm torque
- Automated gearbox, TraXon, 16 speeds (with 530 hp engine only)

BRAKE SYSTEM

MX Engine Brake; Park brake control with test position; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode.

Optional

ZF Intarder

CHASSIS

Wheelbase 6.00 m / rear overhang 3.60 m; Side member height 310 mm; Exhaust pipe horizontal, low; Aluminium fuel tank 430 l height 620 mm; LED rear light unit; Spray suppression; Front Underrun Protection System (FUPS); AdBlue tank 45 litres on left-hand chassis.

Optional

· Exhaust pipe vertical, high



POWER TAKE-OFF (PTO)

Various PTO types and positions.

ELECTRICAL POWER SUPPLY

Alternator 80 A; Batteries 2x 175 Ah.

GVM AND GCM

Chassis weight related technical GVM max 25,200 kg; Driveline related max GCM 70,000 kg.



DAY CAB



SLEEPER CAB

APPLICATION CONDITIONS

Cyclonic air intake behind the cab.

VEHICLE WARRANTY

3 year / 750,000km warranty.



SPACE CAB

DAF Trucks Australia 66 Canterbury Road Bayswater VIC 3153 Phone (03) 9721 1600

