

530 Specification sheet

FTT 6X4 Prime Mover





ENGINES	
XF 530 MX-13 (390 kW / 530 hp)	

GVM	GCM
25,200 kg	70,000 kg
Max. front 7,100 kg	
Max. rear 18,100 kg	





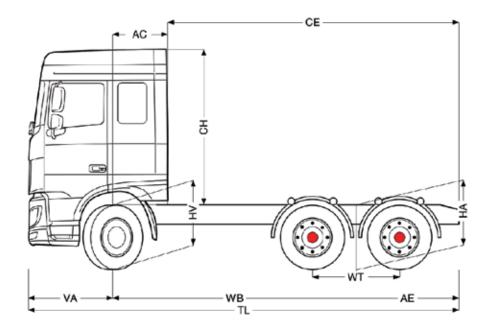



	Wheelbase - AE		Wheelbase – AE Unladen Weight ¹⁾			Variable Dimensions					
	WB	AE	Front	Rear	Total	AC	CE	CH ²⁾	TL	HA ³⁾	HA ⁴⁾
COMFORT	3.90	1.55	5200	3530	8730	0.88	4.57	2.21	6.82	1.05	1.03
	WB	AE	Front	Rear	Total	AC	CE	CH ²⁾	TL	HA ³⁾	HA ⁴⁾
SPACE	3.90	1.55	5381	3530	8911	0.88	4.57	2.51	6.82	1.05	1.03
	WB	AE	Front	Rear	Total	AC	CE	CH ²⁾	TL	HA ³⁾	HA ⁴⁾
SUPER SPACE CAB	3.90	1.55	5364	3530	8894	0.88	4.57	2.89	6.82	1.05	1.03

OTHER DIMENSIONS VA: 1.37 WT: 1.40 HV⁵: 1.03 HV⁶: 1.01 RB: 0.79 SB: 1.84 TB⁷: 2.46

- Chassis and cab weight calculated with: Standard specification items only, less fuel, AdBlue and driver, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- Cab height is measured from frame member to closed cabin roof hatch.

- 3. Unladen height at centre of driven axle(s).
- 4. Laden height at centre of driven axle(s).
- 5. Unladen height at centre of front axle(s).
- 6. Laden height at centre of front axle(s).
- 7. TB is overall width at rear. (At centre of front axle 250).

Note: All dimensions are in metres (m) and weights in kilograms (kg).

CAB EXTERIOR

Space Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2490 mm; Cab suspension mechanical; LED head lights and daytime running lights; Central door lock system, Telescopic windscreen wiper and ice scraper. External sun visor green translucent; Air horns (Dual air horns with Super Space Cab); Fog lights and cornering lights; Skylights (with Super Space Cab).

Optional

· Comfort Cab

Super Space Cab

AERODYNAMICS

- Adjustable roof air deflector (Space Cab)
- Fixed roof air deflector (Super Space Cab)
- Side collars

COLOURS

Cab colour M8870 White; Head lamp panel and bumper colour M8870 White: Chassis colour black.

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Piano Black; Driver seat Super Air; Co-driver seat Super Air; Lower bunk mattress Xtra Comfort; Lower bunk with drawer 65 litres; Upper bunk; Automatic Cab Climate Control; Refrigerator; Pollen filter. Leather steering wheel.

Optional

- Cab interior trim colour Exclusive
- Leather steering wheel, Exclusive (Exclusive interior only)
- Driver seat: Xtra Leather Air (Exclusive interior only)
- Co-driver seat: Xtra Leather Air (Exclusive interior only)

COMMUNICATION AND DRIVING MANAGEMENT

AM/FM Premium Multimedia System with phone, navigation and telematics functionality, 2x GSM antennas, 1 x GPS antenna.

SAFETY AND SECURITY

Adaptive Cruise Control (ACC); Forward Collision Warning (FCW); Advanced Emergency Braking System (AEBS); Lane Departure Warning System (LDWS); Vehicle Stability Control (VSC); Protective cab suspension and construction; Air bag (driver) and 2 seat belt tensioners; Reverse warning; Basic engine immobiliser system.

SUSPENSION AND AXLES

Front: 1x 7,100 kg parabolic leaf springs.

Rear: 2x 9,050 kg, air suspension, SR1360T, Axle load monitoring.

WHEELS AND TYRES

Front axle 1: 295/80R22.5; Rear axle 1: 11R22.5; Alcoa Dura-Bright alloy wheels.

Optional

Alcoa Brushed alloy wheels

DRIVELINE

Engine MX-13, multi torque 6 cylinder diesel engine, 12.9 litres. Output 530 hp at 1,600 rpm, maximum torque 2,600 Nm at 900-1,125 rpm, Exhaust emission Euro 6, 5 minute engine idle shut down, ZF TraXon Automated gearbox, 16 speeds, Gearbox ratio 14.68-0.82, rear axle ratio 3.09, ASR.

BRAKE SYSTEM

MX Engine Brake; Park brake control with test position; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode.

Optional

ZF Intarder

CHASSIS

Wheelbase 3.90 m / rear overhang 1.55 m; Side member height 310 mm; Exhaust pipe horizontal, low; Aluminium fuel tank 600 l and 400 l, height 700 mm; Rear mudguards; LED rear light unit; LED worklamp; Spray suppression; Front underrun protection (FUP); Catwalk with step; AdBlue tank 85 litres on left-hand mudguard; Battery box behind the cab; no spare wheel carrier.



ELECTRICAL POWER SUPPLY

Alternator 80 A; Batteries 2x 230 Ah.

GVM AND GCM

Chassis weight related technical GVM max 25,200 kg; Driveline related max GCM 70,000 kg.

APPLICATION CONDITIONS


Cyclonic air intake behind the cab.

VEHICLE WARRANTY


3 year / 750,000km warranty.



COMFORT CAB



SPACE CAB



SUPER SPACE CAB

DAF Trucks Australia 66 Canterbury Road Bayswater VIC 3153 Phone (03) 9721 1600

